

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P571854

Luminaire Tested: **FLD4C-05-D010 FEU4C-X-90-27 F4X-W-X-LI**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P571854
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-05-D010 FEU4C-X-90-27 F4X-W-X-LI
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBWLI TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 623.0 lumens
Efficiency: N/A
Efficacy: 86.5 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P571854

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-27 F4X-W-X-LI

Luminous Intensity Polar Plot

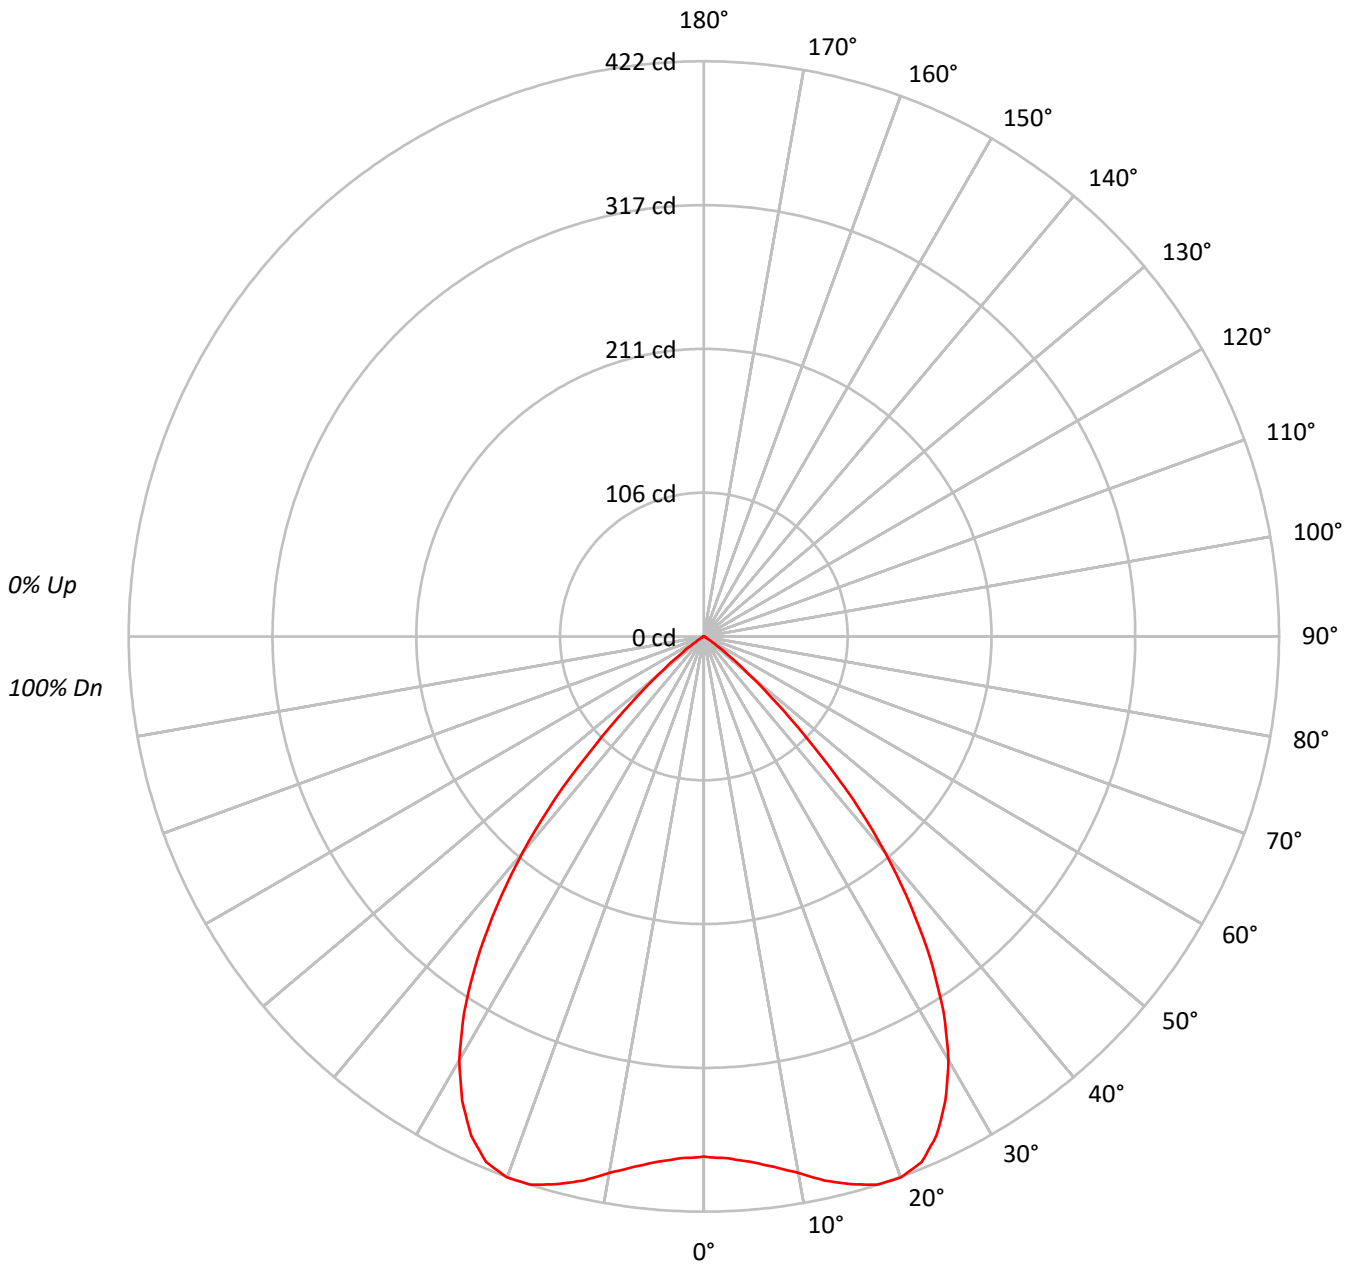

0% Up
100% Dn



TEST NUMBER: P571854

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-27 F4X-W-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77	77	77	77
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54	54	54	54
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49	49	49	49
9	70	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45	45	45	45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42	42	42	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	46893
5°	47689
10°	49850
15°	52910
20°	55224
25°	54750
30°	50913
35°	43553
40°	33181
45°	19459
50°	8314
55°	2442
60°	713
65°	407
70°	251
75°	332
80°	0
85°	0



TEST NUMBER: P571854

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-27 F4X-W-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.3	6.0
10°-20°	117.8	18.9
20°-30°	183.8	29.5
30°-40°	178.8	28.7
40°-50°	89.3	14.3
50°-60°	13.8	2.2
60°-70°	1.7	0.3
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	338.9	54.4
0°-40°	517.7	83.1
0°-60°	620.9	99.7
0°-90°	623.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	623.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	382	
5°	387	37
15°	416	118
25°	404	184
35°	290	179
45°	112	89
55°	11	14
65°	1	2
75°	1	0
85°	0	0
90°	0	



TEST NUMBER: P571854

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-27 F4X-W-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	381.7
2.5°	383.1
5°	386.7
7.5°	392.4
10°	399.6
12.5°	408.8
15°	416.0
17.5°	421.7
20°	422.4
22.5°	417.4
25°	403.9
27.5°	383.9
30°	358.9
32.5°	327.5
35°	290.4
37.5°	249.7
40°	206.9
42.5°	161.3
45°	112.0
47.5°	72.1
50°	43.5
52.5°	23.5
55°	11.4
57.5°	5.0
60°	2.9
62.5°	2.1
65°	1.4
67.5°	1.4
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)