

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P571860

Luminaire Tested: **FLD4C-05-D010 FEU4C-X-90-30 F4X-M-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P571860
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-05-D010 FEU4C-X-90-30 F4X-M-X-H
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBMH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 492.0 lumens
Efficiency: N/A
Efficacy: 68.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P571860

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-30 F4X-M-X-H

Luminous Intensity Polar Plot

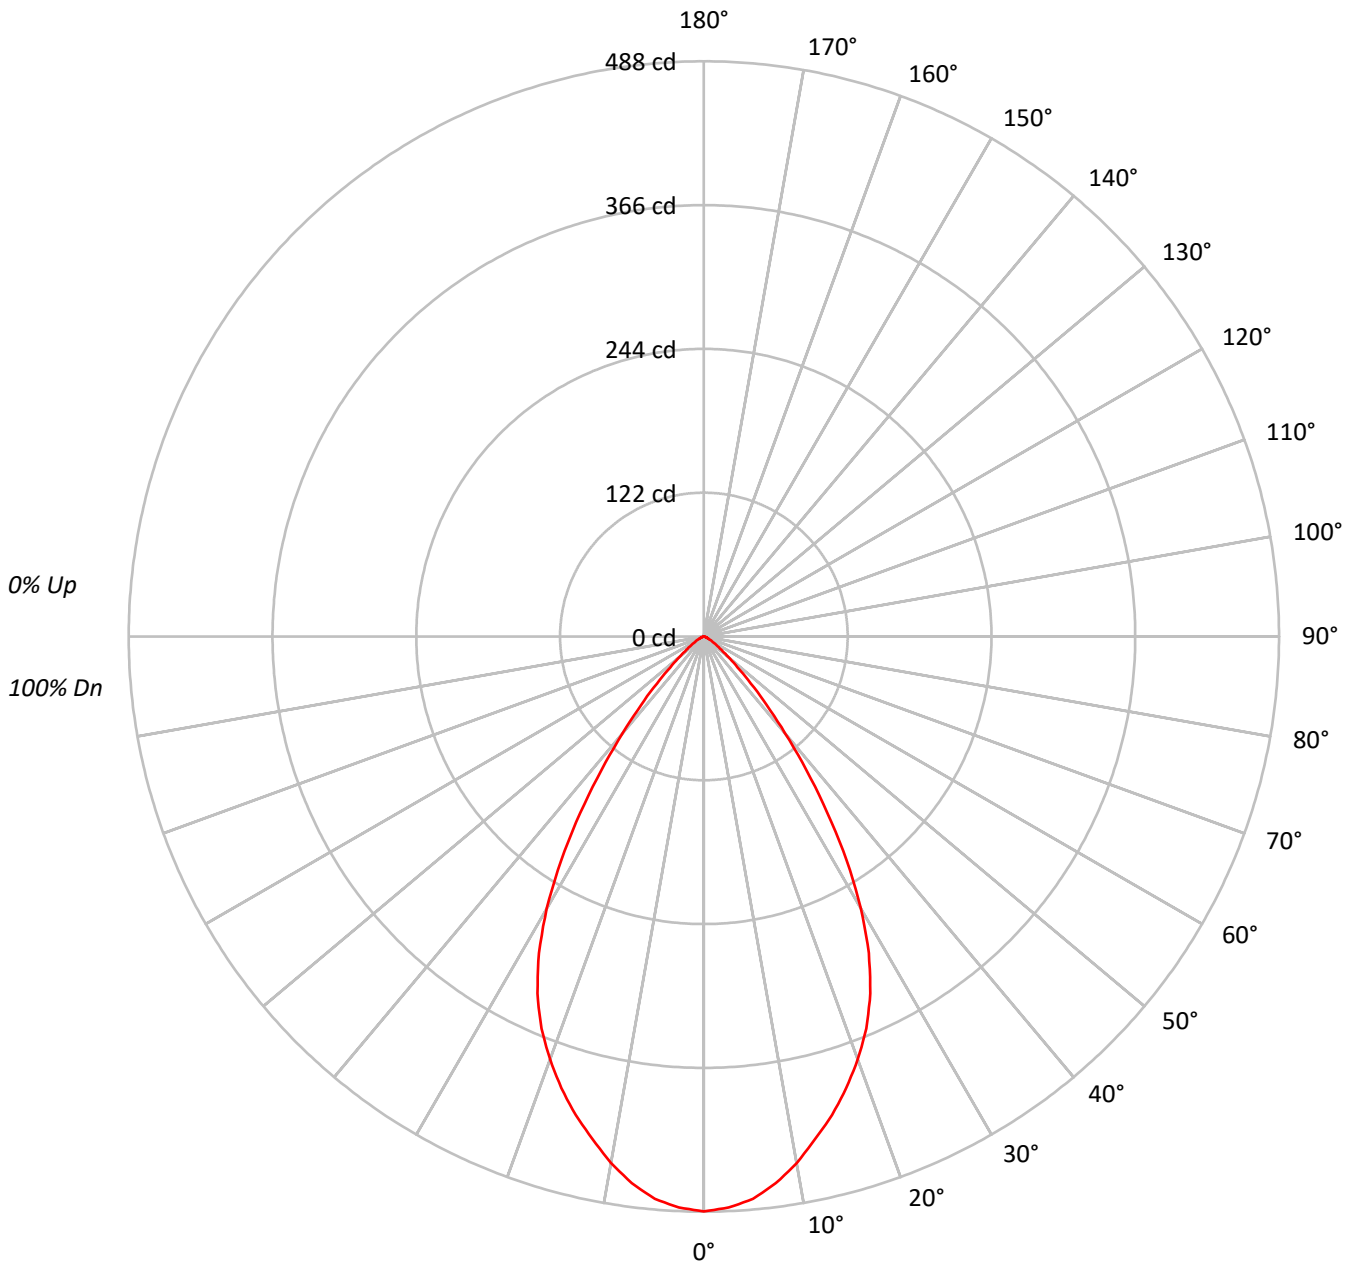



TEST NUMBER: P571860

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-30 F4X-M-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79			79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73			73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67			67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62			62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58			58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54			54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50			50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	59928
5°	59059
10°	56598
15°	53457
20°	49903
25°	45289
30°	37820
35°	27401
40°	17144
45°	9799
50°	5103
55°	2870
60°	1818
65°	1076
70°	790
75°	332
80°	495
85°	0



TEST NUMBER: P571860

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-30 F4X-M-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.9	9.1
10°-20°	117.8	23.9
20°-30°	151.3	30.8
30°-40°	113.9	23.1
40°-50°	45.7	9.3
50°-60°	13.0	2.6
60°-70°	4.1	0.8
70°-80°	1.1	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	314.0	63.8
0°-40°	427.9	87.0
0°-60°	486.6	98.9
0°-90°	492.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	492.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	488	
5°	479	45
15°	420	118
25°	334	151
35°	183	114
45°	56	46
55°	13	13
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P571860

CATALOG NUMBER: FLD4C-05-D010 FEU4C-X-90-30 F4X-M-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	487.8
2.5°	484.9
5°	478.9
7.5°	467.8
10°	453.7
12.5°	436.6
15°	420.3
17.5°	401.7
20°	381.7
22.5°	360.1
25°	334.1
27.5°	302.9
30°	266.6
32.5°	225.7
35°	182.7
37.5°	142.6
40°	106.9
42.5°	78.7
45°	56.4
47.5°	38.6
50°	26.7
52.5°	18.6
55°	13.4
57.5°	9.7
60°	7.4
62.5°	5.2
65°	3.7
67.5°	3.0
70°	2.2
72.5°	1.5
75°	0.7
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)