

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572010

Luminaire Tested: **FLD4C-08-D010 FEU4C-X-90-27 F4X-M-X-LI**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572010
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-08-D010 FEU4C-X-90-27 F4X-M-X-LI
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBMLI TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 793.0 lumens
Efficiency: N/A
Efficacy: 80.3 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.87
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572010

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-27 F4X-M-X-LI

Luminous Intensity Polar Plot

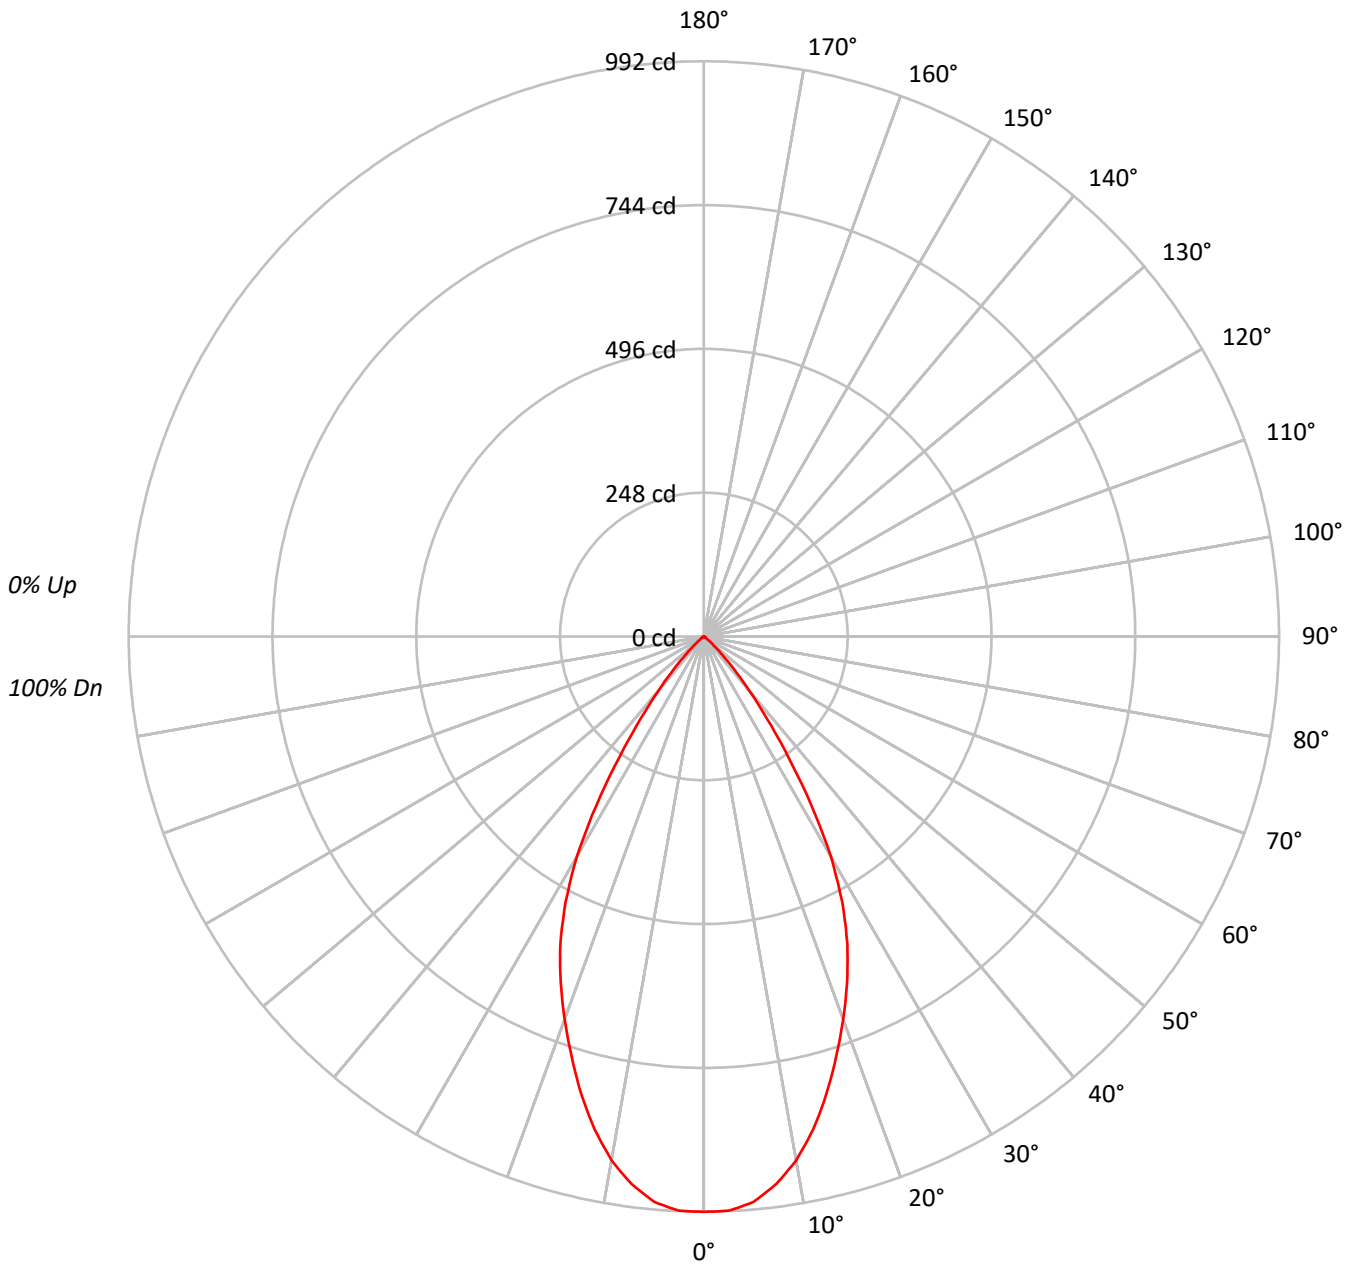



TEST NUMBER: P572010

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-27 F4X-M-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 114 | 111 | 109 | 106 | 111 | 109 | 107 | 105 | 105 | 103 | 101 | 101 | 100 | 98 | 98 | 97 | 96 | 94 | | | |
| 2 | 108 | 103 | 100 | 96 | 106 | 102 | 98 | 95 | 99 | 96 | 93 | 96 | 93 | 91 | 93 | 91 | 89 | 88 | | | |
| 3 | 103 | 97 | 92 | 88 | 101 | 95 | 91 | 87 | 93 | 89 | 86 | 90 | 87 | 85 | 88 | 85 | 83 | 82 | | | |
| 4 | 98 | 91 | 85 | 81 | 96 | 89 | 84 | 81 | 87 | 83 | 80 | 85 | 82 | 79 | 83 | 80 | 78 | 76 | | | |
| 5 | 93 | 85 | 79 | 75 | 91 | 84 | 79 | 75 | 82 | 78 | 74 | 81 | 77 | 73 | 79 | 76 | 73 | 71 | | | |
| 6 | 89 | 80 | 74 | 70 | 87 | 79 | 74 | 70 | 78 | 73 | 69 | 76 | 72 | 69 | 75 | 71 | 68 | 67 | | | |
| 7 | 84 | 75 | 69 | 65 | 83 | 75 | 69 | 65 | 73 | 68 | 65 | 72 | 68 | 64 | 71 | 67 | 64 | 63 | | | |
| 8 | 80 | 71 | 65 | 61 | 79 | 70 | 65 | 61 | 69 | 64 | 61 | 68 | 64 | 60 | 67 | 63 | 60 | 59 | | | |
| 9 | 77 | 67 | 61 | 57 | 75 | 67 | 61 | 57 | 66 | 61 | 57 | 65 | 60 | 57 | 64 | 60 | 57 | 55 | | | |
| 10 | 73 | 64 | 58 | 54 | 72 | 63 | 58 | 54 | 62 | 57 | 54 | 62 | 57 | 54 | 61 | 57 | 54 | 52 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 121920 |
| 5° | 120758 |
| 10° | 114432 |
| 15° | 103899 |
| 20° | 91804 |
| 25° | 79367 |
| 30° | 62035 |
| 35° | 38049 |
| 40° | 19534 |
| 45° | 7766 |
| 50° | 2523 |
| 55° | 878 |
| 60° | 737 |
| 65° | 581 |
| 70° | 359 |
| 75° | 475 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P572010

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-27 F4X-M-X-LI

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 91.4 | 11.5 |
| 10°-20° | 227.6 | 28.7 |
| 20°-30° | 264.6 | 33.4 |
| 30°-40° | 162.0 | 20.4 |
| 40°-50° | 40.3 | 5.1 |
| 50°-60° | 4.7 | 0.6 |
| 60°-70° | 1.7 | 0.2 |
| 70°-80° | 0.7 | 0.1 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 583.6 | 73.6 |
| 0°-40° | 745.6 | 94.0 |
| 0°-60° | 790.6 | 99.7 |
| 0°-90° | 793.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 793.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 992 | |
| 5° | 979 | 91 |
| 15° | 817 | 228 |
| 25° | 586 | 265 |
| 35° | 254 | 162 |
| 45° | 45 | 40 |
| 55° | 4 | 5 |
| 65° | 2 | 2 |
| 75° | 1 | 1 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P572010

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-27 F4X-M-X-LI

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 992.4 |
| 2.5° | 991.4 |
| 5° | 979.2 |
| 7.5° | 952.8 |
| 10° | 917.3 |
| 12.5° | 870.6 |
| 15° | 816.9 |
| 17.5° | 759.0 |
| 20° | 702.2 |
| 22.5° | 645.4 |
| 25° | 585.5 |
| 27.5° | 516.5 |
| 30° | 437.3 |
| 32.5° | 345.0 |
| 35° | 253.7 |
| 37.5° | 178.6 |
| 40° | 121.8 |
| 42.5° | 76.1 |
| 45° | 44.7 |
| 47.5° | 25.4 |
| 50° | 13.2 |
| 52.5° | 6.1 |
| 55° | 4.1 |
| 57.5° | 3.0 |
| 60° | 3.0 |
| 62.5° | 2.0 |
| 65° | 2.0 |
| 67.5° | 1.0 |
| 70° | 1.0 |
| 72.5° | 1.0 |
| 75° | 1.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)