

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572076

Luminaire Tested: **FLD4C-08-D010 FEU4C-X-90-35 F4X-M-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572076
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-08-D010 FEU4C-X-90-35 F4X-M-X-H
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 4LBMH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 671.0 lumens
Efficiency: N/A
Efficacy: 68.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.87
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572076

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-35 F4X-M-X-H

Luminous Intensity Polar Plot

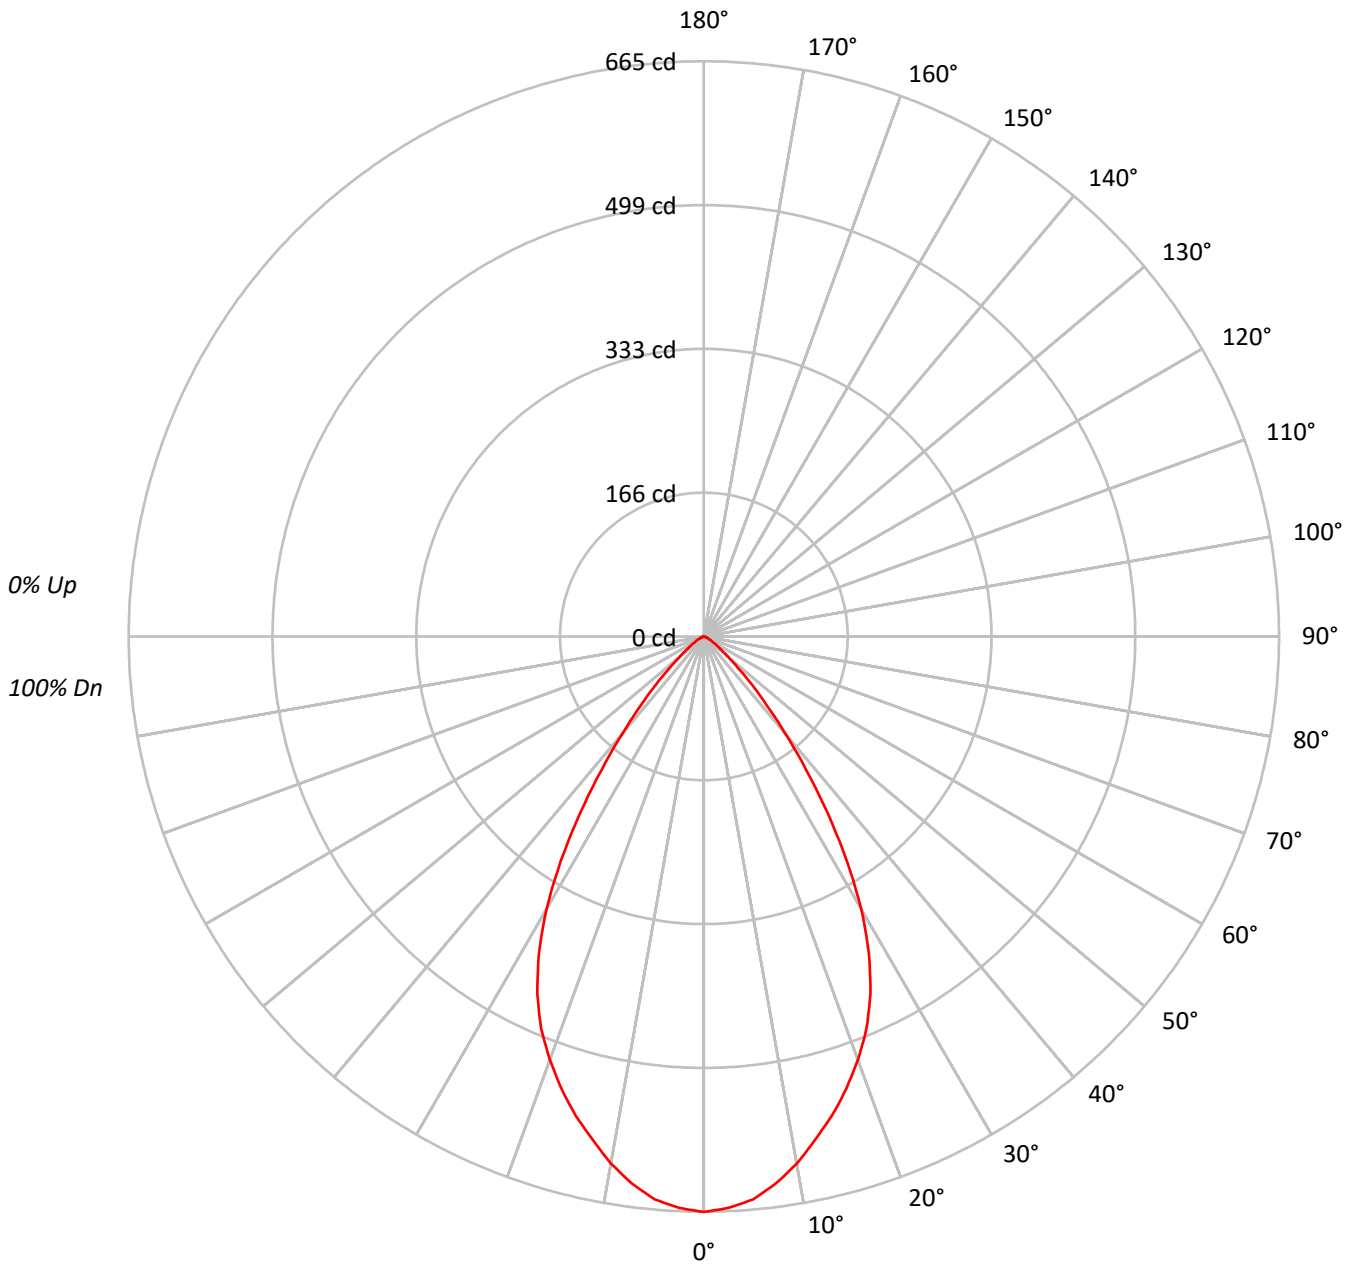



TEST NUMBER: P572076

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-35 F4X-M-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79				79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73				73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67				67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62				62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58				58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54				54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50				50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47				47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	81734
5°	80554
10°	77182
15°	72904
20°	68049
25°	61772
30°	51580
35°	37359
40°	23383
45°	13378
50°	6976
55°	3898
60°	2482
65°	1483
70°	1078
75°	475
80°	707
85°	0



TEST NUMBER: P572076

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-35 F4X-M-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.2	9.1
10°-20°	160.6	23.9
20°-30°	206.4	30.8
30°-40°	155.3	23.1
40°-50°	62.4	9.3
50°-60°	17.7	2.6
60°-70°	5.6	0.8
70°-80°	1.6	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	428.3	63.8
0°-40°	583.5	87.0
0°-60°	663.6	98.9
0°-90°	671.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	671.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	665	
5°	653	61
15°	573	161
25°	456	206
35°	249	155
45°	77	62
55°	18	18
65°	5	6
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P572076

CATALOG NUMBER: FLD4C-08-D010 FEU4C-X-90-35 F4X-M-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	665.3
2.5°	661.3
5°	653.2
7.5°	638.0
10°	618.7
12.5°	595.5
15°	573.2
17.5°	547.9
20°	520.5
22.5°	491.2
25°	455.7
27.5°	413.2
30°	363.6
32.5°	307.8
35°	249.1
37.5°	194.4
40°	145.8
42.5°	107.3
45°	77.0
47.5°	52.7
50°	36.5
52.5°	25.3
55°	18.2
57.5°	13.2
60°	10.1
62.5°	7.1
65°	5.1
67.5°	4.1
70°	3.0
72.5°	2.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)