

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364455

Luminaire Tested: **FLD6BX10D010-FEU6B12-8027-F6LBXVM1-LI-BTR94**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364455
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-27)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-LI-BTR94
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM GLASS, TEMPERED CLEAR 0.187", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 794.0 lumens
Efficiency: N/A
Efficacy: 79.4 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364455

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-LI-BTR94

Luminous Intensity Polar Plot

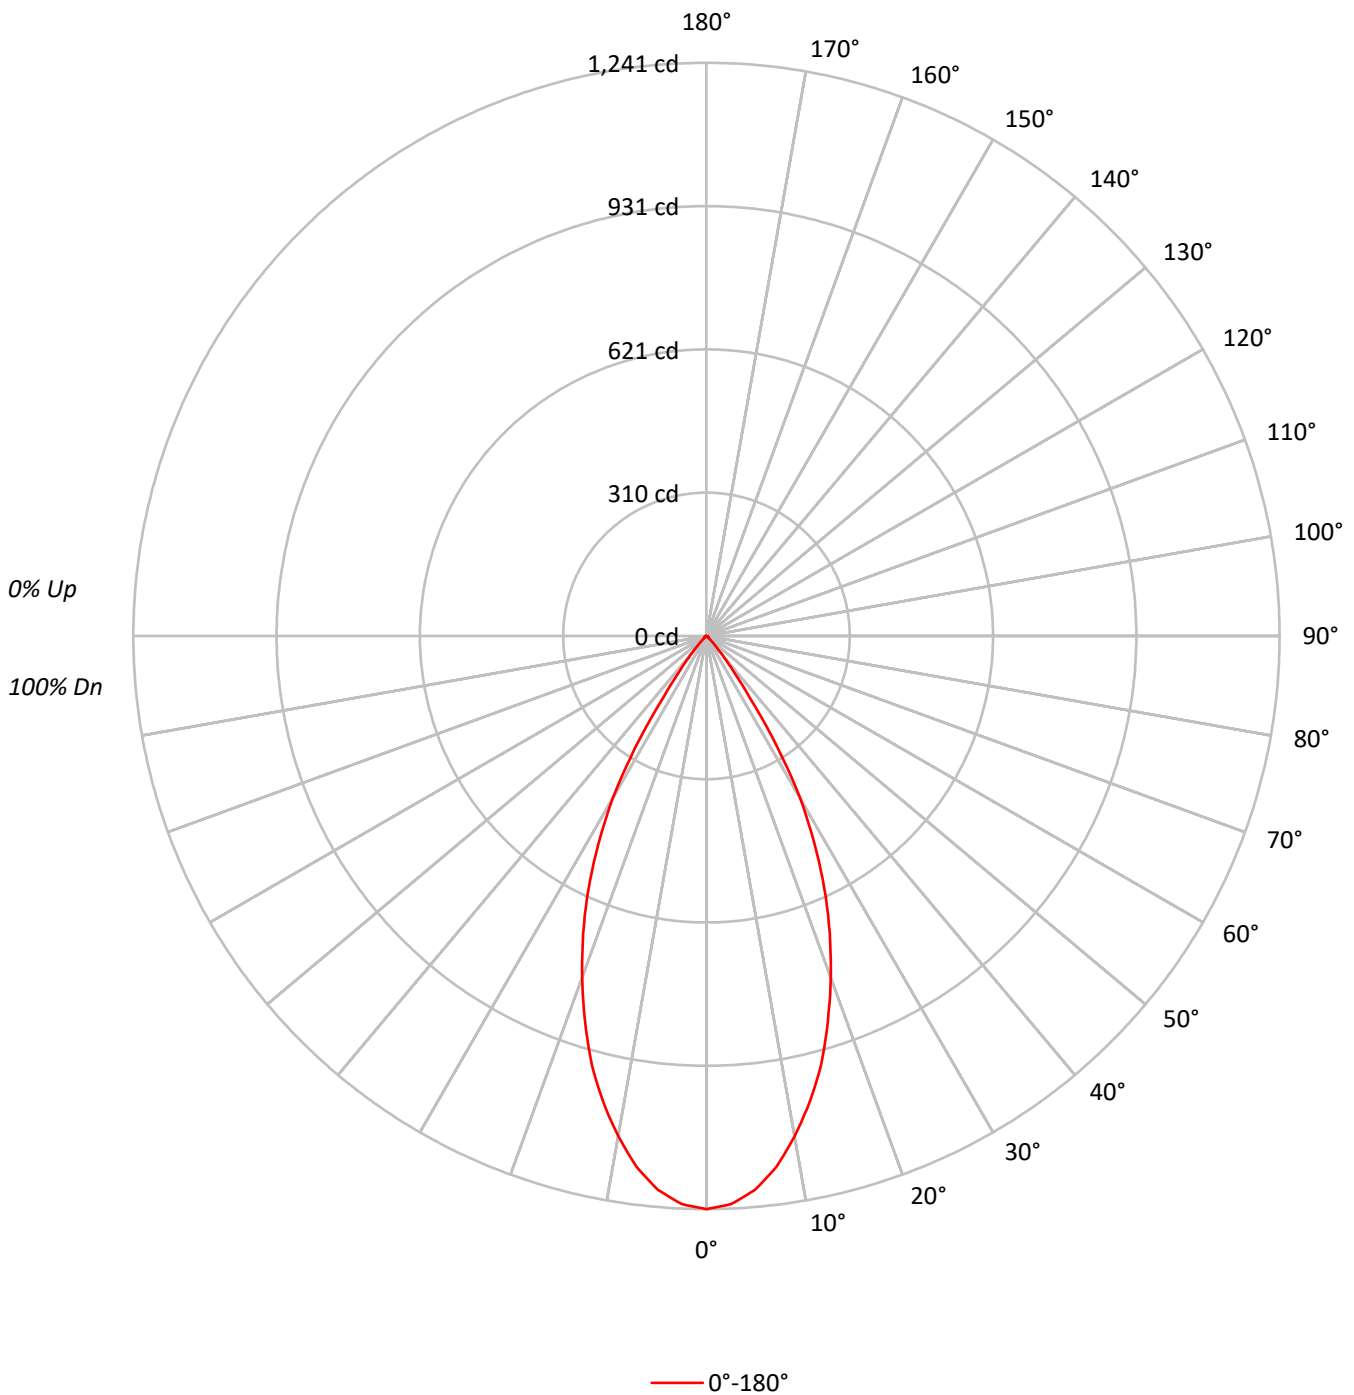



TEST NUMBER: P364455

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-LI-BTR94

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	88
3	104	98	93	90	102	96	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		77	74	71	70
7	87	78	73	69	85	77	72	68	76	72	68		75	71	68		74	70	67	66
8	83	74	69	65	82	74	68	65	73	68	64		72	67	64		71	67	64	63
9	79	71	65	61	78	70	65	61	69	64	61		68	64	61		67	64	61	59
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	88872
5°	86524
10°	79977
15°	71200
20°	59959
25°	47782
30°	33468
35°	14178
40°	4945
45°	1357
50°	691
55°	649
60°	644
65°	576
70°	565
75°	747
80°	990
85°	1397



TEST NUMBER: P364455

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-LI-BTR94

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.6	14.1
10°-20°	265.5	33.4
20°-30°	273.1	34.4
30°-40°	116.7	14.7
40°-50°	14.6	1.8
50°-60°	4.7	0.6
60°-70°	3.4	0.4
70°-80°	2.7	0.3
80°-90°	1.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	650.3	81.9
0°-40°	766.9	96.6
0°-60°	786.2	99.0
0°-90°	794.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	794.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1241	
5°	1204	112
15°	960	266
25°	605	273
35°	162	117
45°	13	15
55°	5	5
65°	3	3
75°	3	3
85°	2	2
90°	0	



TEST NUMBER: P364455

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-LI-BTR94

CANDELA DISTRIBUTION (FULL):

0°	
0°	1241.2
2.5°	1231.2
5°	1203.8
7.5°	1159.8
10°	1100.0
12.5°	1033.3
15°	960.5
17.5°	873.9
20°	786.9
22.5°	697.6
25°	604.8
27.5°	506.9
30°	404.8
32.5°	287.6
35°	162.2
37.5°	92.8
40°	52.9
42.5°	27.5
45°	13.4
47.5°	7.2
50°	6.2
52.5°	5.5
55°	5.2
57.5°	4.8
60°	4.5
62.5°	3.8
65°	3.4
67.5°	3.1
70°	2.7
72.5°	2.7
75°	2.7
77.5°	2.4
80°	2.4
82.5°	2.1
85°	1.7
87.5°	1.0
90°	0.0

(END OF REPORT)