

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365161

Luminaire Tested: **FLD6BX10D010-FEU6B12-8027-F6LBXVM1-MW-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365161
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-38)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-MW-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 779.0 lumens
Efficiency: N/A
Efficacy: 77.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365161

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-MW-BL86

Luminous Intensity Polar Plot

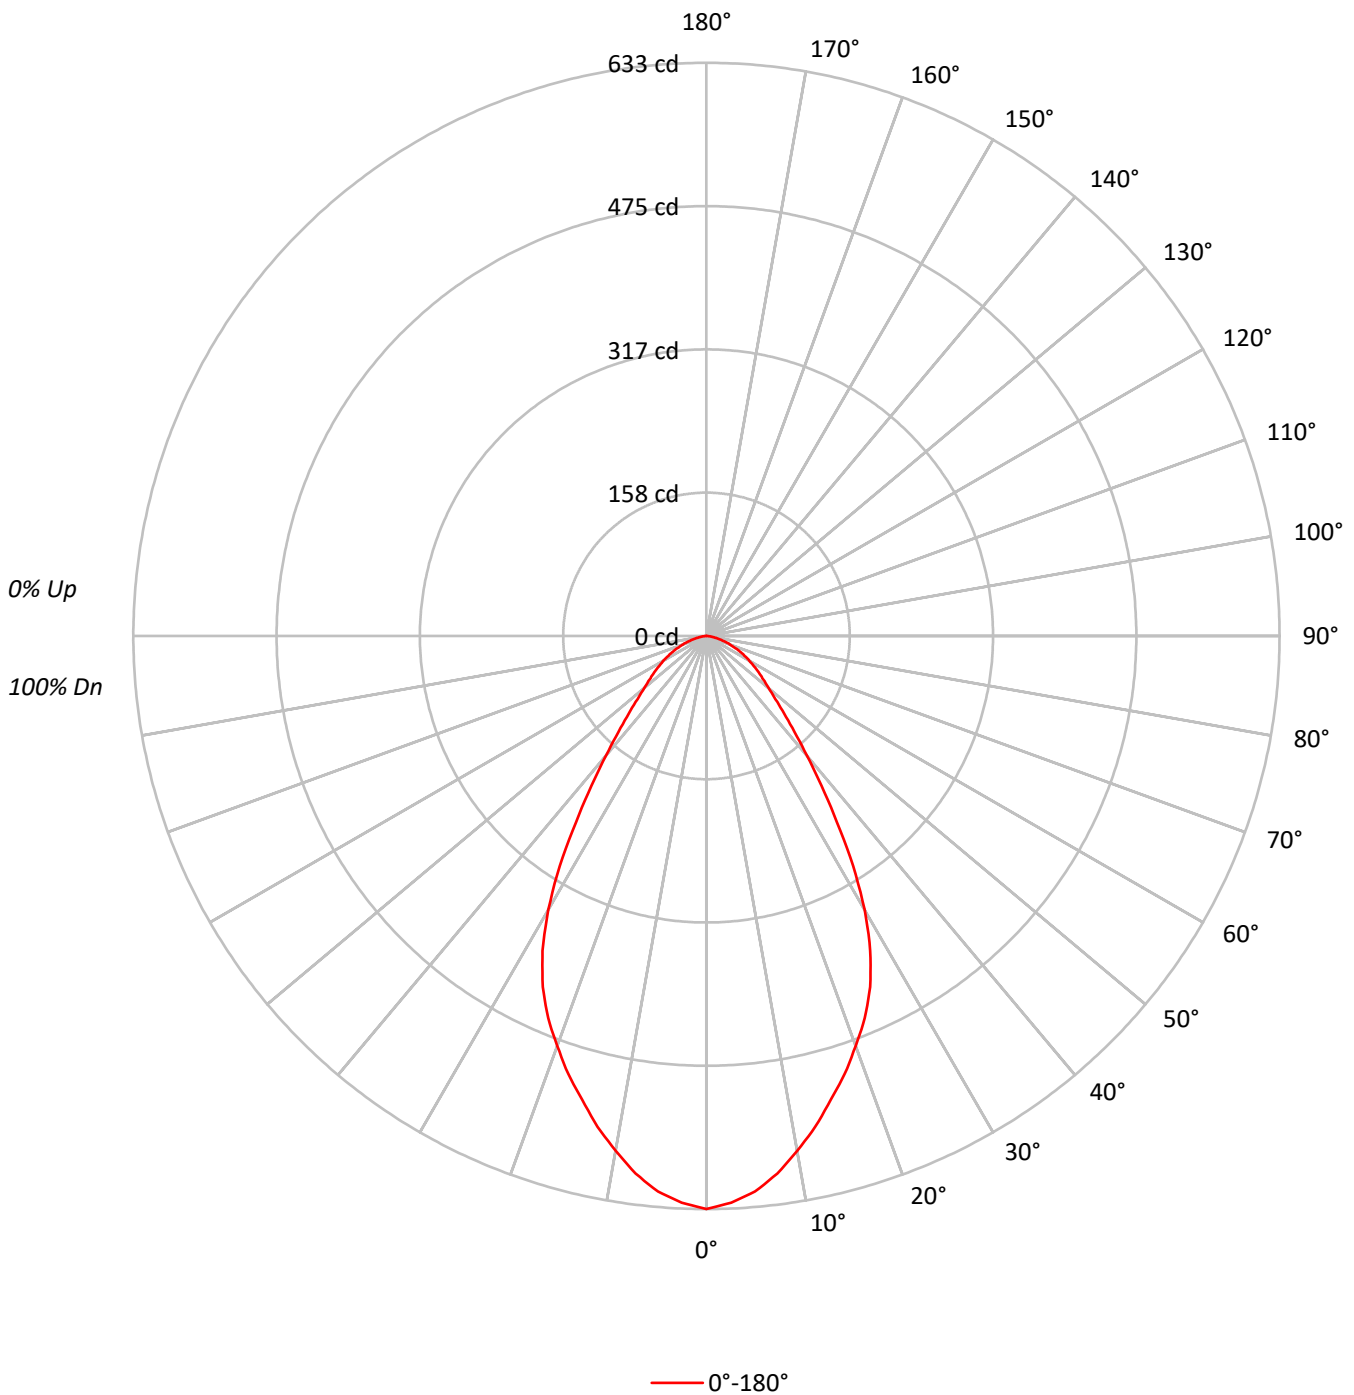



TEST NUMBER: P365161

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-MW-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		83	78	75		80	77	74	72
4	91	82	75	70	89	80	74	69	78	73	68		76	71	67		74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62		70	65	61		69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56		65	60	56		64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52		61	55	51		60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47		57	51	47		56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	64	52	46	41	62	52	45	41	51	45	41		50	45	41		49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	17288
5°	16885
10°	16012
15°	14991
20°	14002
25°	12890
30°	11017
35°	8380
40°	6140
45°	4674
50°	3812
55°	3357
60°	2988
65°	2624
70°	2220
75°	1741
80°	1195
85°	533



TEST NUMBER: P365161

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-MW-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.6	7.4
10°-20°	149.0	19.1
20°-30°	194.0	24.9
30°-40°	158.3	20.3
40°-50°	95.7	12.3
50°-60°	63.4	8.1
60°-70°	40.3	5.2
70°-80°	17.9	2.3
80°-90°	2.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	400.6	51.4
0°-40°	558.9	71.8
0°-60°	718.0	92.2
0°-90°	779.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	779.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	633	
5°	616	58
15°	530	149
25°	428	194
35°	251	158
45°	121	96
55°	70	63
65°	41	40
75°	16	18
85°	2	3
90°	0	



TEST NUMBER: P365161

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8027-F6LBXVM1-MW-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	632.9
2.5°	626.4
5°	615.8
7.5°	598.9
10°	577.3
12.5°	555.2
15°	530.1
17.5°	507.5
20°	481.7
22.5°	456.9
25°	427.7
27.5°	391.9
30°	349.3
32.5°	301.5
35°	251.3
37.5°	208.7
40°	172.2
42.5°	143.4
45°	121.0
47.5°	103.5
50°	89.7
52.5°	79.1
55°	70.5
57.5°	62.2
60°	54.7
62.5°	47.4
65°	40.6
67.5°	34.0
70°	27.8
72.5°	22.0
75°	16.5
77.5°	11.7
80°	7.6
82.5°	4.1
85°	1.7
87.5°	0.3
90°	0.0

(END OF REPORT)