

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365185

Luminaire Tested: **FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR81**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365185
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-19)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR81
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 566.0 lumens
Efficiency: N/A
Efficacy: 56.6 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.19
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365185

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR81

Luminous Intensity Polar Plot

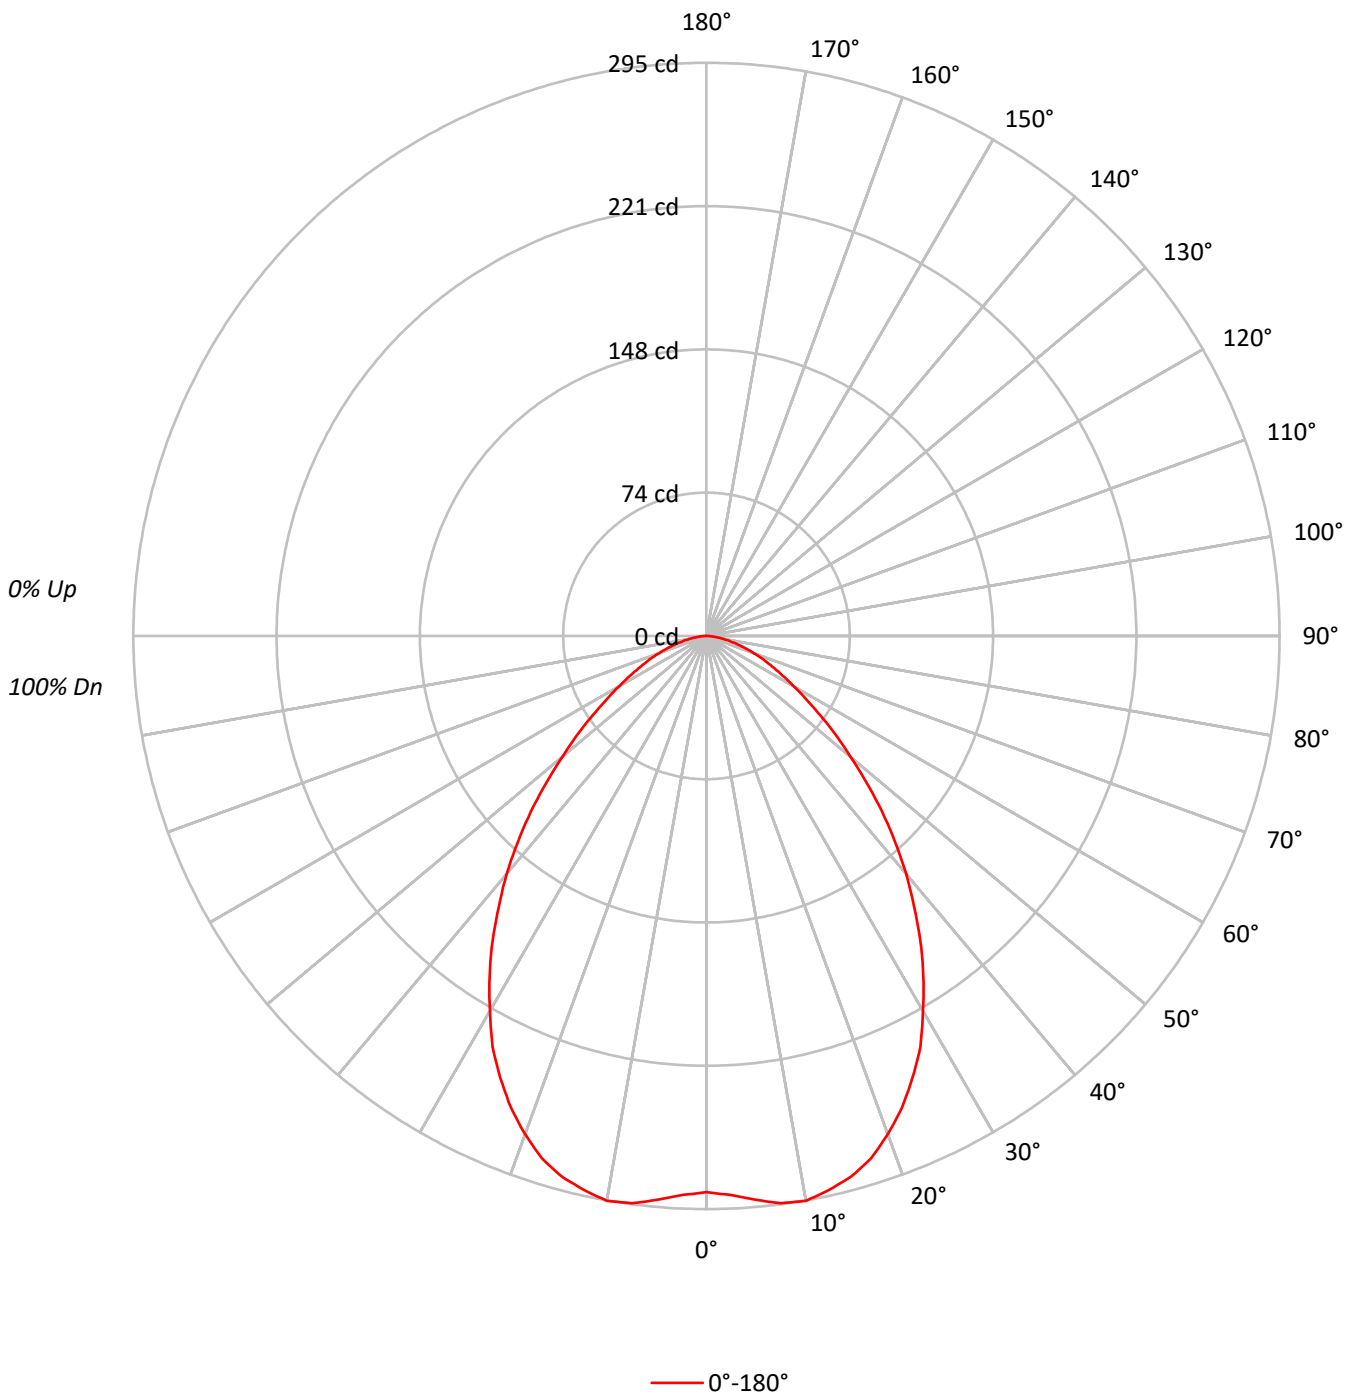



TEST NUMBER: P365185

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR81

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	105	101	99	101	98	96		97	95	93		93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82		87	84	80		84	81	79	77
3	95	86	79	73	93	84	78	73	81	76	71		79	74	70		76	72	69	67
4	88	77	70	64	86	76	69	64	74	68	63		72	66	62		70	65	61	59
5	82	70	62	57	80	69	62	56	67	61	56		65	60	55		64	59	55	53
6	76	64	56	51	74	63	56	50	62	55	50		60	54	49		58	53	49	47
7	71	59	51	45	69	58	51	45	57	50	45		55	49	45		54	49	44	43
8	66	54	46	41	65	54	46	41	52	46	41		51	45	41		50	45	40	39
9	62	50	43	38	61	50	42	37	48	42	37		47	41	37		46	41	37	35
10	59	47	39	34	58	46	39	34	45	39	34		44	38	34		43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	20492
5°	20937
10°	21463
15°	21349
20°	20794
25°	19830
30°	18429
35°	16783
40°	14955
45°	12931
50°	10772
55°	8938
60°	7461
65°	6336
70°	5422
75°	4482
80°	3546
85°	2629



TEST NUMBER: P365185

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR81

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	27.9	4.9
10°-20°	80.9	14.3
20°-30°	115.1	20.3
30°-40°	119.6	21.1
40°-50°	98.3	17.4
50°-60°	64.9	11.5
60°-70°	37.6	6.6
70°-80°	17.5	3.1
80°-90°	4.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	223.9	39.6
0°-40°	343.6	60.7
0°-60°	506.8	89.6
0°-90°	566.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	566.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	286	
5°	291	28
15°	288	81
25°	251	115
35°	192	120
45°	128	98
55°	72	65
65°	37	38
75°	16	18
85°	3	4
90°	0	



TEST NUMBER: P365185

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR81

CANDELA DISTRIBUTION (FULL):

0°	
0°	286.2
2.5°	288.0
5°	291.3
7.5°	294.5
10°	295.2
12.5°	292.0
15°	288.0
17.5°	281.9
20°	272.9
22.5°	262.9
25°	251.0
27.5°	238.4
30°	222.9
32.5°	207.8
35°	192.0
37.5°	175.5
40°	160.0
42.5°	143.5
45°	127.7
47.5°	111.8
50°	96.7
52.5°	84.1
55°	71.6
57.5°	61.1
60°	52.1
62.5°	44.2
65°	37.4
67.5°	31.6
70°	25.9
72.5°	20.9
75°	16.2
77.5°	12.2
80°	8.6
82.5°	5.8
85°	3.2
87.5°	1.4
90°	0.0

(END OF REPORT)