

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365191

Luminaire Tested: **FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR89BI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365191
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-13)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR89BI
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM ACRYLIC, CLEAR RFI 0.125", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 623.0 lumens
Efficiency: N/A
Efficacy: 62.3 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.84
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365191

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR89BI

Luminous Intensity Polar Plot

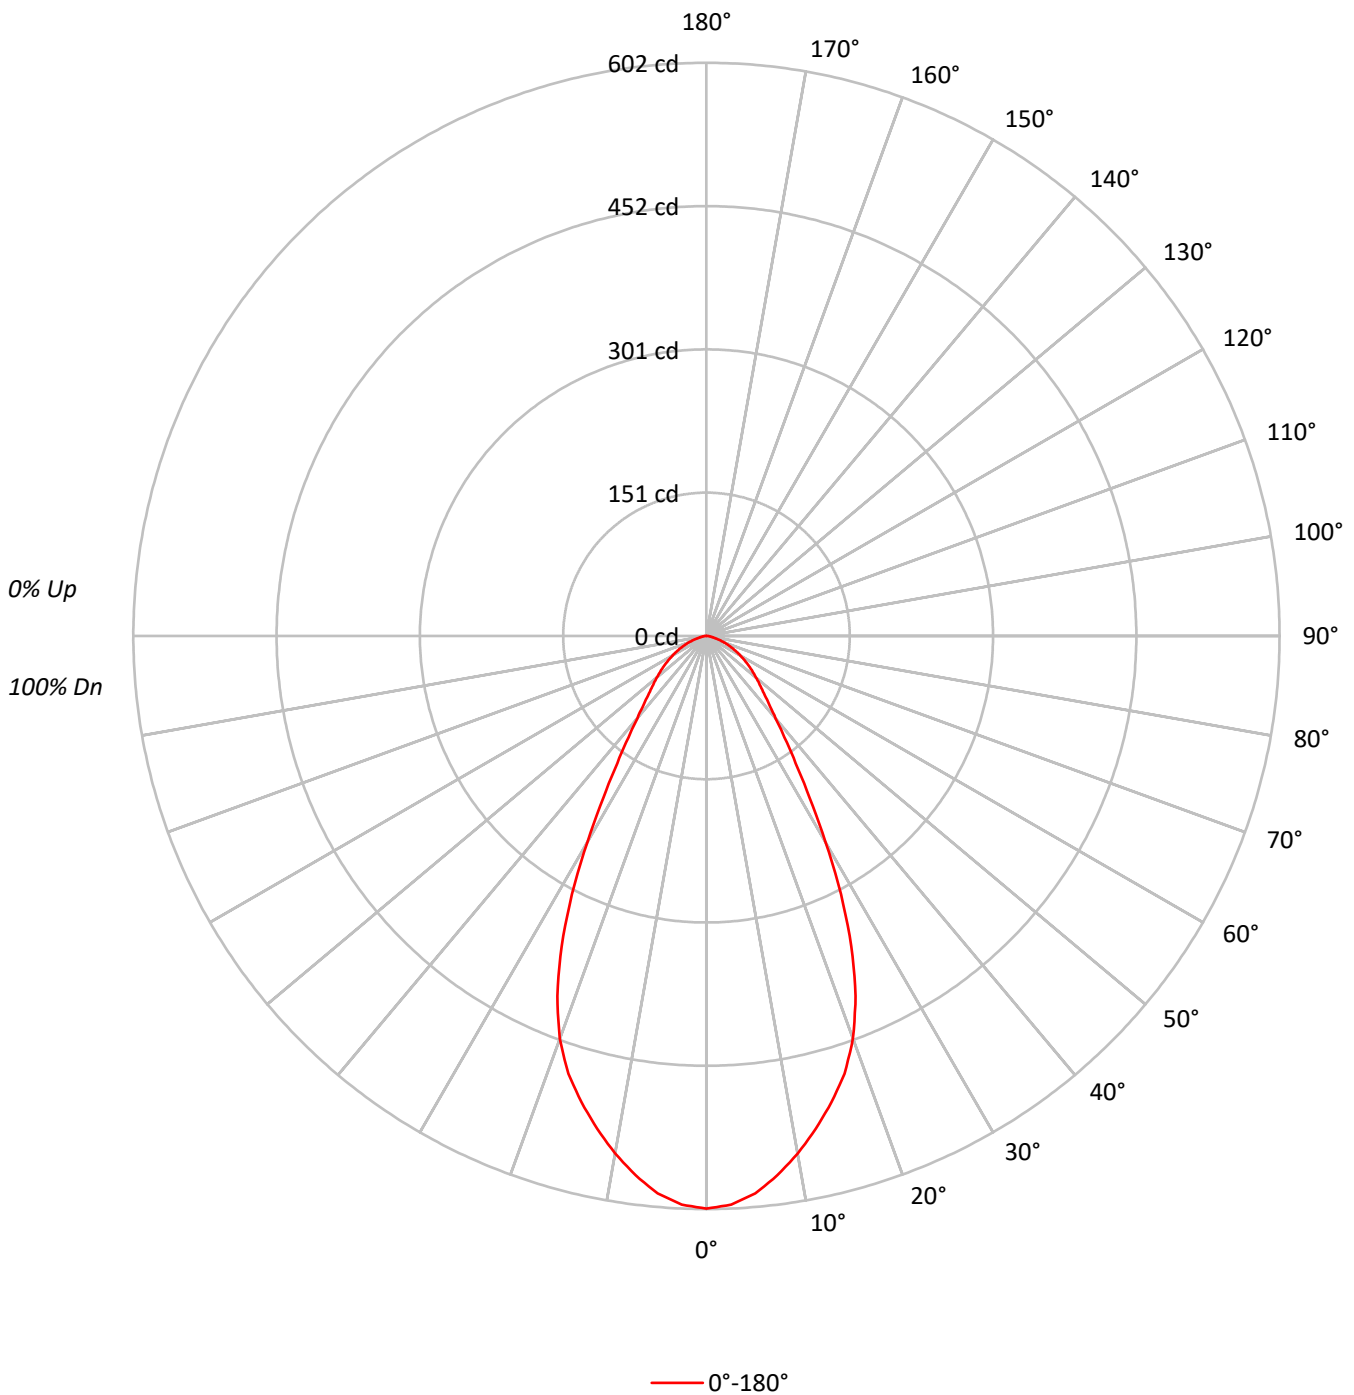



TEST NUMBER: P365191

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR89BI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98		99	97	95		95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	91	85	80	96	89	84	79	86	82	78		84	80	77		82	78	75	74
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76	72	69	67
5	87	77	70	65	85	76	70	65	74	68	64		72	67	64		71	66	63	61
6	82	72	65	60	80	71	64	59	69	63	59		68	62	58		66	62	58	56
7	77	67	60	55	76	66	59	55	65	59	54		63	58	54		62	57	54	52
8	73	62	56	51	72	62	55	51	61	55	50		59	54	50		58	54	50	48
9	69	59	52	47	68	58	52	47	57	51	47		56	51	47		55	50	47	45
10	66	55	49	44	65	55	48	44	54	48	44		53	48	44		52	47	44	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	43069
5°	42248
10°	40127
15°	37583
20°	34296
25°	28434
30°	20628
35°	14265
40°	10553
45°	8627
50°	7575
55°	6729
60°	5871
65°	4998
70°	3999
75°	2877
80°	2062
85°	2382



TEST NUMBER: P365191

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR89BI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.9	8.8
10°-20°	141.7	22.8
20°-30°	162.1	26.0
30°-40°	105.1	16.9
40°-50°	67.0	10.8
50°-60°	48.3	7.7
60°-70°	29.4	4.7
70°-80°	11.7	1.9
80°-90°	2.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	358.8	57.6
0°-40°	463.9	74.5
0°-60°	579.3	93.0
0°-90°	623.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	623.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	602	
5°	588	55
15°	507	142
25°	360	162
35°	163	105
45°	85	67
55°	54	48
65°	30	29
75°	10	12
85°	3	3
90°	0	



TEST NUMBER: P365191

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-MW-BTR89BI

CANDELA DISTRIBUTION (FULL):

0°	
0°	601.5
2.5°	597.9
5°	587.8
7.5°	571.3
10°	551.9
12.5°	530.3
15°	507.0
17.5°	482.1
20°	450.1
22.5°	409.2
25°	359.9
27.5°	306.0
30°	249.5
32.5°	201.0
35°	163.2
37.5°	134.5
40°	112.9
42.5°	97.1
45°	85.2
47.5°	75.9
50°	68.0
52.5°	60.8
55°	53.9
57.5°	47.1
60°	41.0
62.5°	35.2
65°	29.5
67.5°	24.1
70°	19.1
72.5°	14.7
75°	10.4
77.5°	7.2
80°	5.0
82.5°	3.2
85°	2.9
87.5°	1.4
90°	0.0

(END OF REPORT)