

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365905

Luminaire Tested: **FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR81**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365905  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-31)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR81  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 1000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 769.9 lumens  
Efficiency: N/A  
Efficacy: 77.0 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.19  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 10  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365905

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR81

### Luminous Intensity Polar Plot

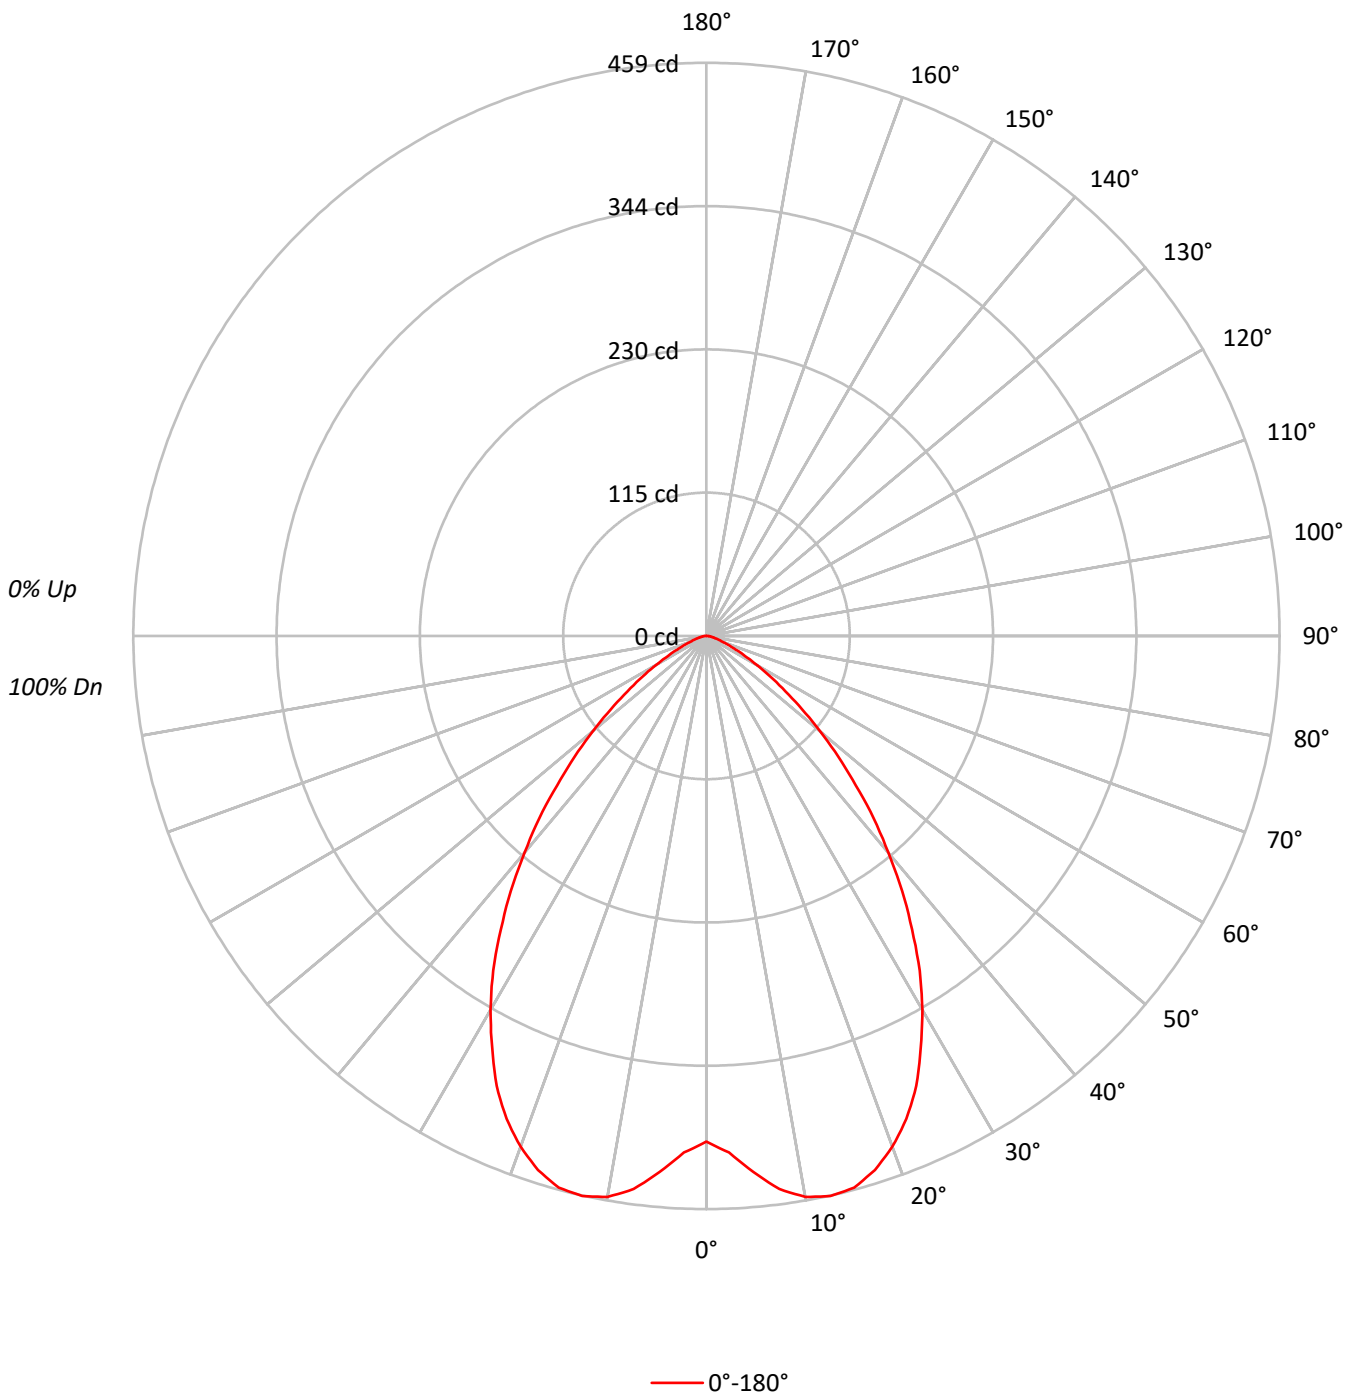



TEST NUMBER: P365905

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR81

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71
4	91	81	74	69	89	80	73	68	78	72	67	75	71	67	73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	58	51	46	68	57	50	45	56	50	45	55	49	45	54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	41	51	45	41	50	45	41	39
10	62	50	43	38	60	49	43	38	49	42	38	48	42	38	47	42	38	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	28984
5°	30978
10°	33169
15°	33899
20°	33169
25°	31412
30°	28599
35°	25087
40°	21180
45°	17133
50°	13200
55°	9637
60°	6630
65°	4388
70°	2847
75°	2075
80°	1773
85°	2054



TEST NUMBER: P365905

CATALOG NUMBER: FLD6BX10D010-FEUG6B12-8030-F6LBXVM1-WMH-BTR81

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	42.0	5.4
10°-20°	128.0	16.6
20°-30°	181.4	23.6
30°-40°	178.9	23.2
40°-50°	131.2	17.0
50°-60°	70.3	9.1
60°-70°	27.0	3.5
70°-80°	8.6	1.1
80°-90°	2.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	351.4	45.6
0°-40°	530.3	68.9
0°-60°	731.8	95.1
0°-90°	769.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	769.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	405	
5°	431	42
15°	457	128
25°	398	181
35°	287	179
45°	169	131
55°	77	70
65°	26	27
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P365905

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR81

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	404.8
2.5°	414.1
5°	431.0
7.5°	446.8
10°	456.2
12.5°	459.4
15°	457.3
17.5°	448.6
20°	435.3
22.5°	418.5
25°	397.6
27.5°	371.8
30°	345.9
32.5°	317.9
35°	287.0
37.5°	257.5
40°	226.6
42.5°	198.3
45°	169.2
47.5°	143.3
50°	118.5
52.5°	96.3
55°	77.2
57.5°	60.3
60°	46.3
62.5°	34.8
65°	25.9
67.5°	19.0
70°	13.6
72.5°	10.4
75°	7.5
77.5°	5.7
80°	4.3
82.5°	3.2
85°	2.5
87.5°	1.4
90°	0.0

(END OF REPORT)