

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365906

Luminaire Tested: **FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365906
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 772.0 lumens
Efficiency: N/A
Efficacy: 77.2 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365906

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

Luminous Intensity Polar Plot

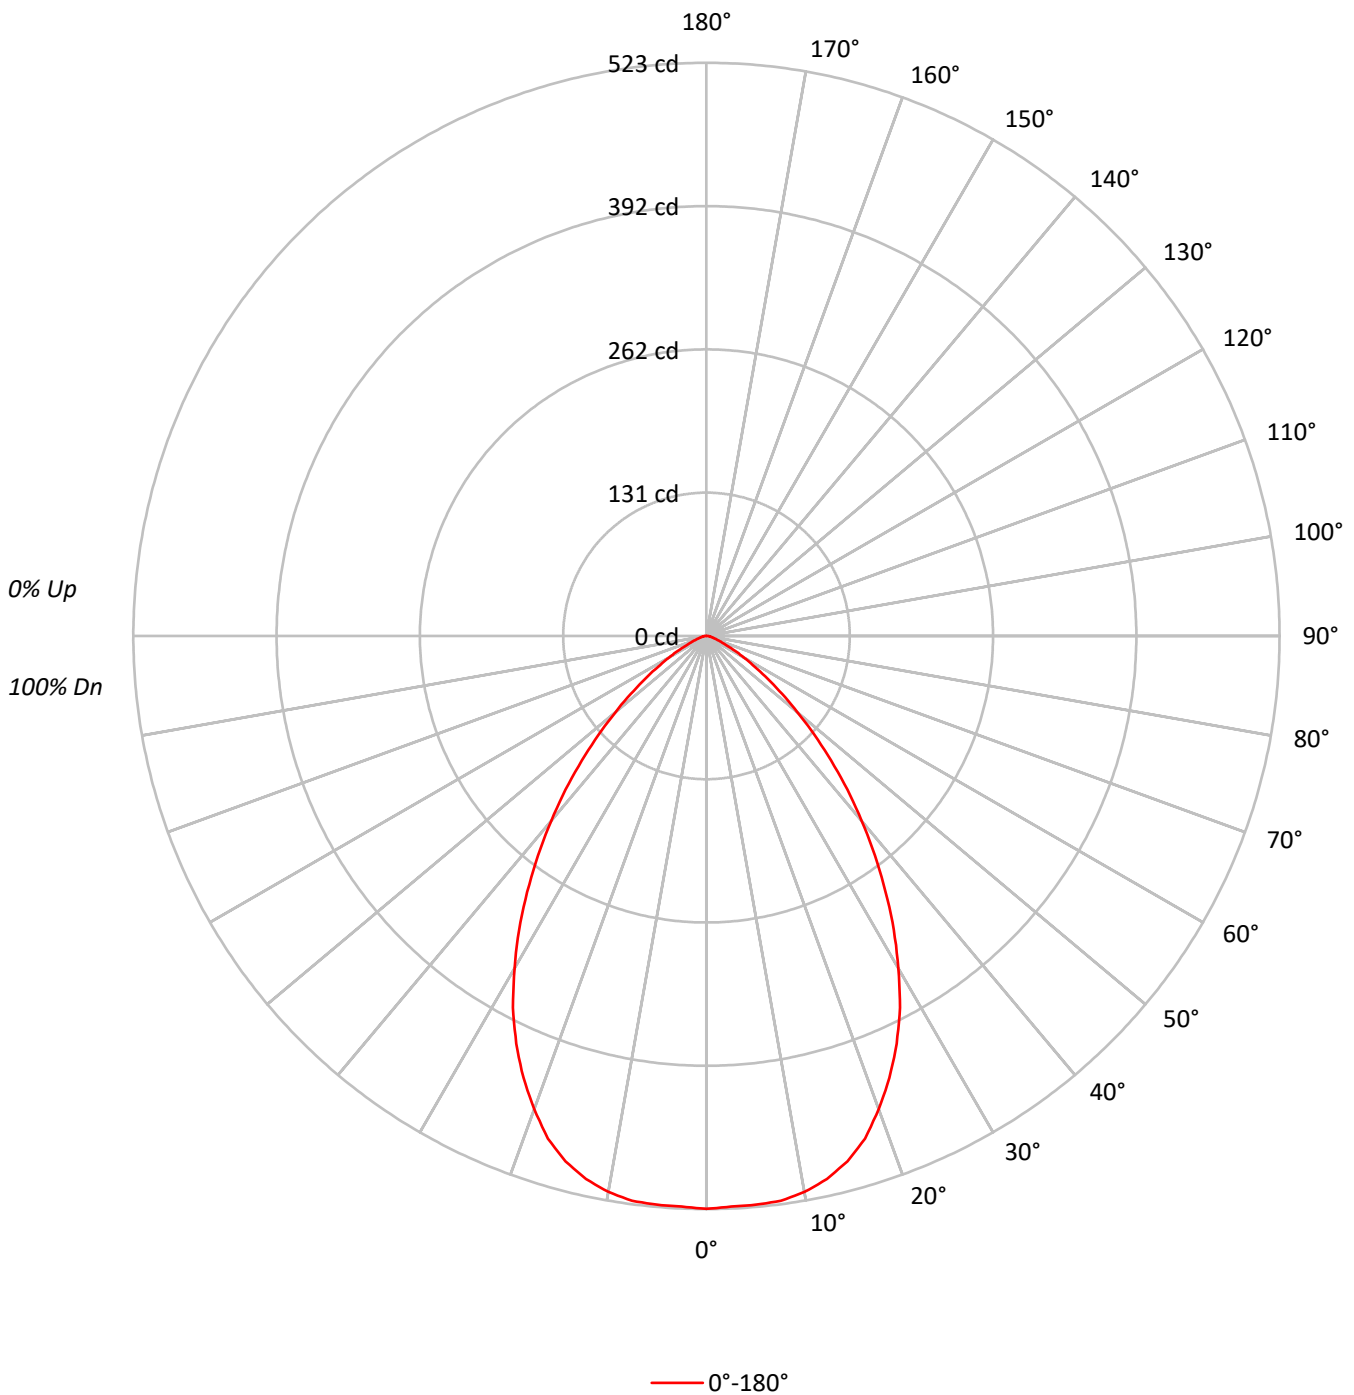



TEST NUMBER: P365906

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	37426
5°	37440
10°	37458
15°	36804
20°	35005
25°	32431
30°	28946
35°	24921
40°	20563
45°	16273
50°	12097
55°	8526
60°	5657
65°	3473
70°	2261
75°	1688
80°	1484
85°	1807



TEST NUMBER: P365906

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.6	6.4
10°-20°	139.0	18.0
20°-30°	187.6	24.3
30°-40°	177.6	23.0
40°-50°	124.4	16.1
50°-60°	62.6	8.1
60°-70°	22.1	2.9
70°-80°	6.9	0.9
80°-90°	2.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	376.2	48.7
0°-40°	553.7	71.7
0°-60°	740.8	96.0
0°-90°	772.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	772.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	523	
5°	521	50
15°	496	139
25°	410	188
35°	285	178
45°	161	124
55°	68	63
65°	20	22
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P365906

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	522.7
2.5°	521.3
5°	520.9
7.5°	519.8
10°	515.2
12.5°	507.6
15°	496.5
17.5°	481.0
20°	459.4
22.5°	436.4
25°	410.5
27.5°	382.5
30°	350.1
32.5°	318.2
35°	285.1
37.5°	252.4
40°	220.0
42.5°	190.2
45°	160.7
47.5°	133.7
50°	108.6
52.5°	87.0
55°	68.3
57.5°	52.5
60°	39.5
62.5°	29.1
65°	20.5
67.5°	15.1
70°	10.8
72.5°	8.3
75°	6.1
77.5°	4.7
80°	3.6
82.5°	2.9
85°	2.2
87.5°	1.1
90°	0.0

(END OF REPORT)