

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365212

Luminaire Tested: **FLD6BX10D010-FEU6B12-8035-F6LBXVM1-MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365212
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-5)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-MW
Description: VANDAL RESISTANT OPEN, MATTE WHITE REFLECTOR, 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 941.9 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.94
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365212

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-MW

Luminous Intensity Polar Plot

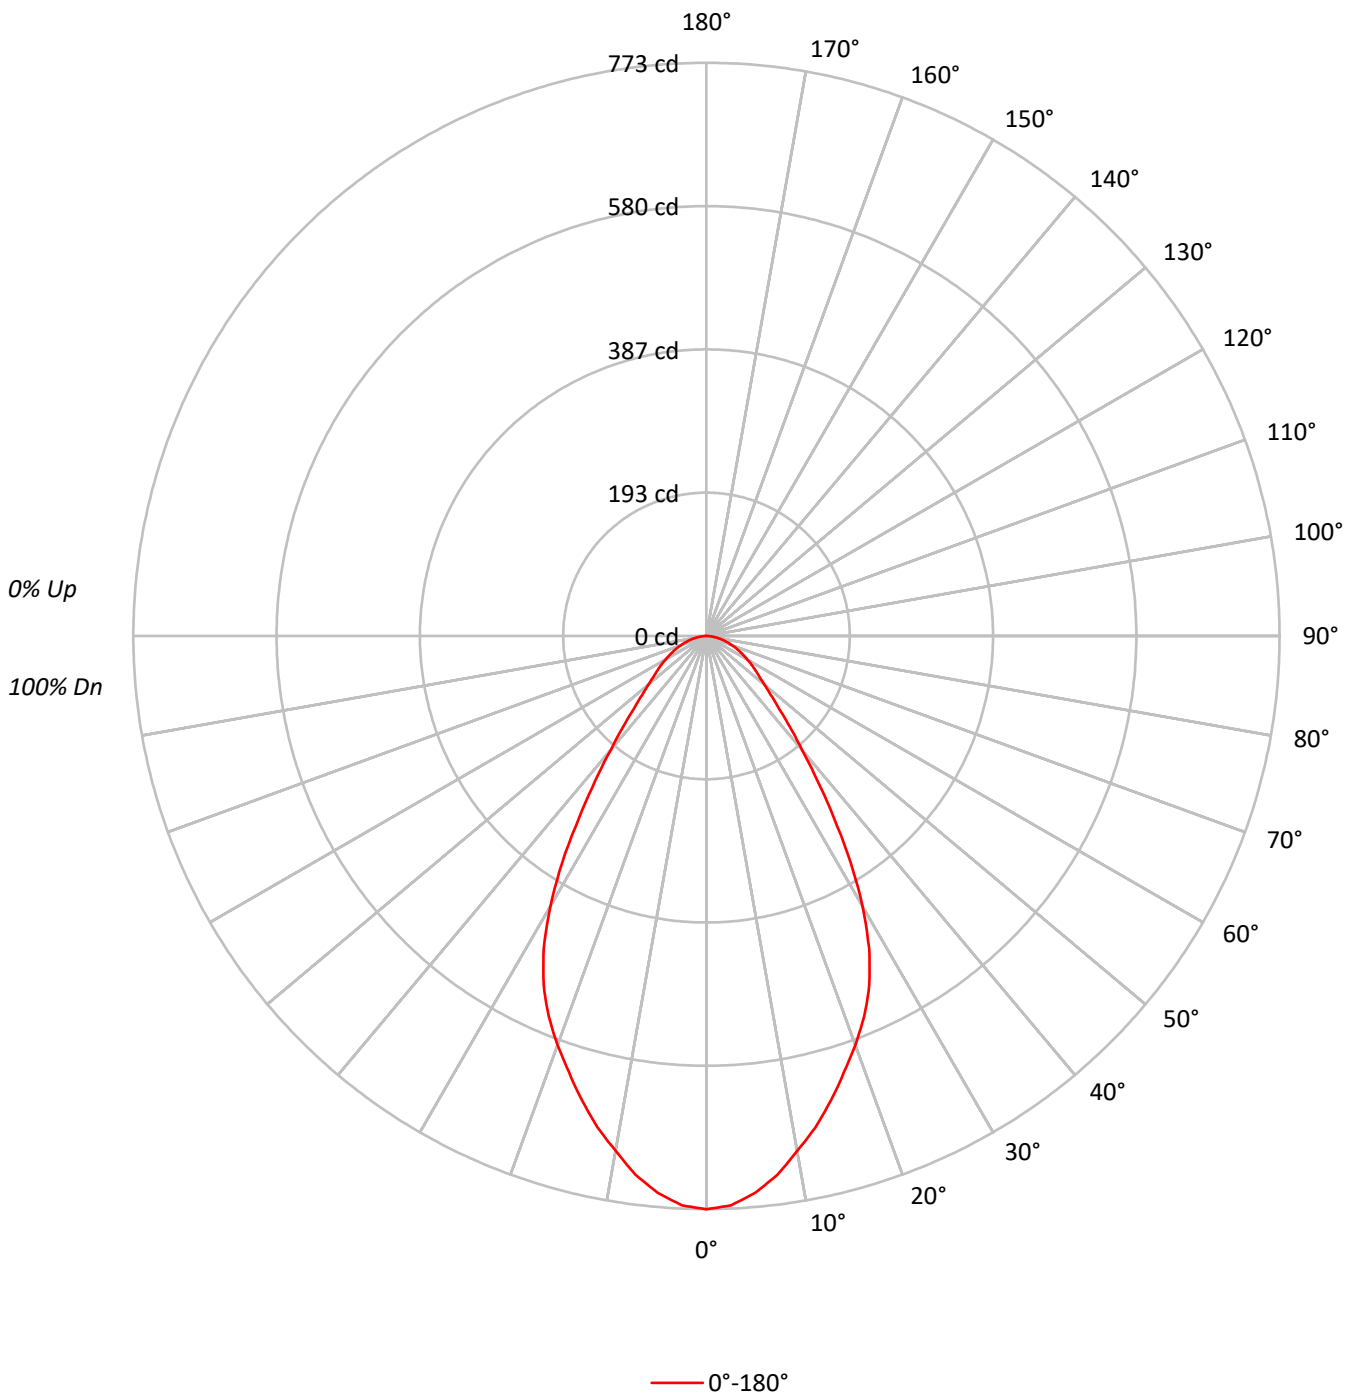



TEST NUMBER: P365212

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89
2	104	98	93	88	102	96	91	87	93	89	85	89	86	83	87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71
4	91	81	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47	57	51	47	56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42
10	64	52	46	41	63	52	45	41	51	45	41	50	45	41	49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	21123
5°	20669
10°	19554
15°	18342
20°	17063
25°	15663
30°	13272
35°	9970
40°	7153
45°	5350
50°	4313
55°	3829
60°	3480
65°	3186
70°	2915
75°	2670
80°	2375
85°	1974



TEST NUMBER: P365212

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.4	7.5
10°-20°	181.8	19.3
20°-30°	235.5	25.0
30°-40°	188.5	20.0
40°-50°	109.9	11.7
50°-60°	72.5	7.7
60°-70°	49.2	5.2
70°-80°	26.9	2.9
80°-90°	7.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	487.8	51.8
0°-40°	676.3	71.8
0°-60°	858.7	91.2
0°-90°	941.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	941.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	773	
5°	754	70
15°	649	182
25°	520	236
35°	299	188
45°	138	110
55°	80	72
65°	49	49
75°	25	27
85°	6	7
90°	0	



TEST NUMBER: P365212

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	773.3
2.5°	768.4
5°	753.8
7.5°	732.9
10°	705.0
12.5°	678.9
15°	648.6
17.5°	617.0
20°	587.0
22.5°	555.7
25°	519.7
27.5°	475.1
30°	420.8
32.5°	362.1
35°	299.0
37.5°	246.0
40°	200.6
42.5°	166.2
45°	138.5
47.5°	117.4
50°	101.5
52.5°	89.5
55°	80.4
57.5°	72.0
60°	63.7
62.5°	56.4
65°	49.3
67.5°	43.0
70°	36.5
72.5°	30.8
75°	25.3
77.5°	20.1
80°	15.1
82.5°	10.4
85°	6.3
87.5°	2.3
90°	0.0

(END OF REPORT)