

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364508

Luminaire Tested: **FLD6BX10D010-FEU6B12-8040-F6LBXVM1-LI-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364508
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-LI-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR 0.125", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 878.0 lumens
Efficiency: N/A
Efficacy: 87.8 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364508

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-LI-BTR89BV

Luminous Intensity Polar Plot

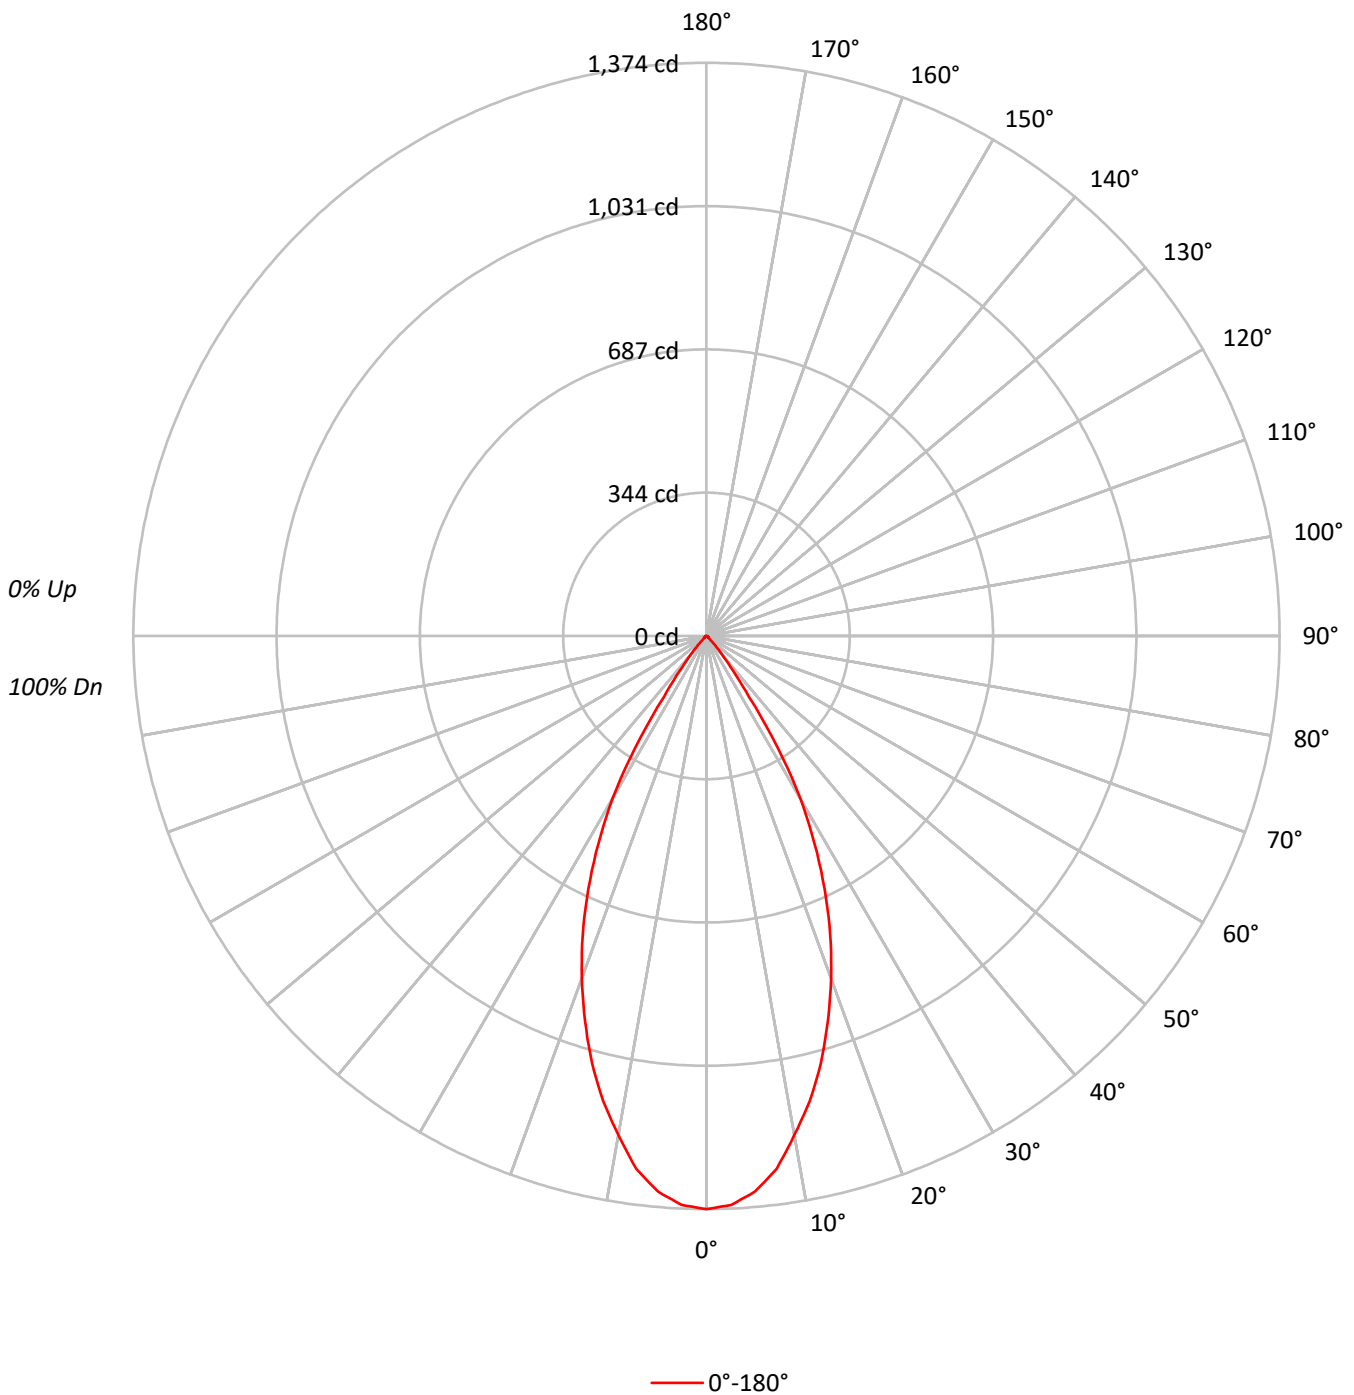



TEST NUMBER: P364508

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-LI-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	98381
5°	96097
10°	88324
15°	78605
20°	66581
25°	52948
30°	37222
35°	15533
40°	5365
45°	1387
50°	702
55°	649
60°	630
65°	627
70°	628
75°	830
80°	907
85°	1561



TEST NUMBER: P364508

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-LI-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	123.8	14.1
10°-20°	293.7	33.5
20°-30°	303.1	34.5
30°-40°	128.9	14.7
40°-50°	15.5	1.8
50°-60°	4.7	0.5
60°-70°	3.7	0.4
70°-80°	3.0	0.3
80°-90°	1.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	720.6	82.1
0°-40°	849.5	96.8
0°-60°	869.7	99.1
0°-90°	878.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	878.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1374	
5°	1337	124
15°	1060	294
25°	670	303
35°	178	129
45°	14	15
55°	5	5
65°	4	4
75°	3	3
85°	2	2
90°	0	



TEST NUMBER: P364508

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-LI-BTR89BV

CANDELA DISTRIBUTION (FULL):

0°	
0°	1374.0
2.5°	1365.1
5°	1337.0
7.5°	1288.1
10°	1214.8
12.5°	1142.6
15°	1060.4
17.5°	967.8
20°	873.8
22.5°	775.7
25°	670.2
27.5°	561.3
30°	450.2
32.5°	319.2
35°	177.7
37.5°	102.2
40°	57.4
42.5°	29.6
45°	13.7
47.5°	7.4
50°	6.3
52.5°	5.6
55°	5.2
57.5°	4.8
60°	4.4
62.5°	4.1
65°	3.7
67.5°	3.3
70°	3.0
72.5°	3.0
75°	3.0
77.5°	2.6
80°	2.2
82.5°	2.2
85°	1.9
87.5°	1.1
90°	0.0

(END OF REPORT)