

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365221

Luminaire Tested: **FLD6BX10D010-FEU6B12-8040-F6LBXVM1-MW-BTR81**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365221  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-MW-BTR81  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 1000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 583.0 lumens  
Efficiency: N/A  
Efficacy: 58.3 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.19  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 10  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365221

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-MW-BTR81

### Luminous Intensity Polar Plot

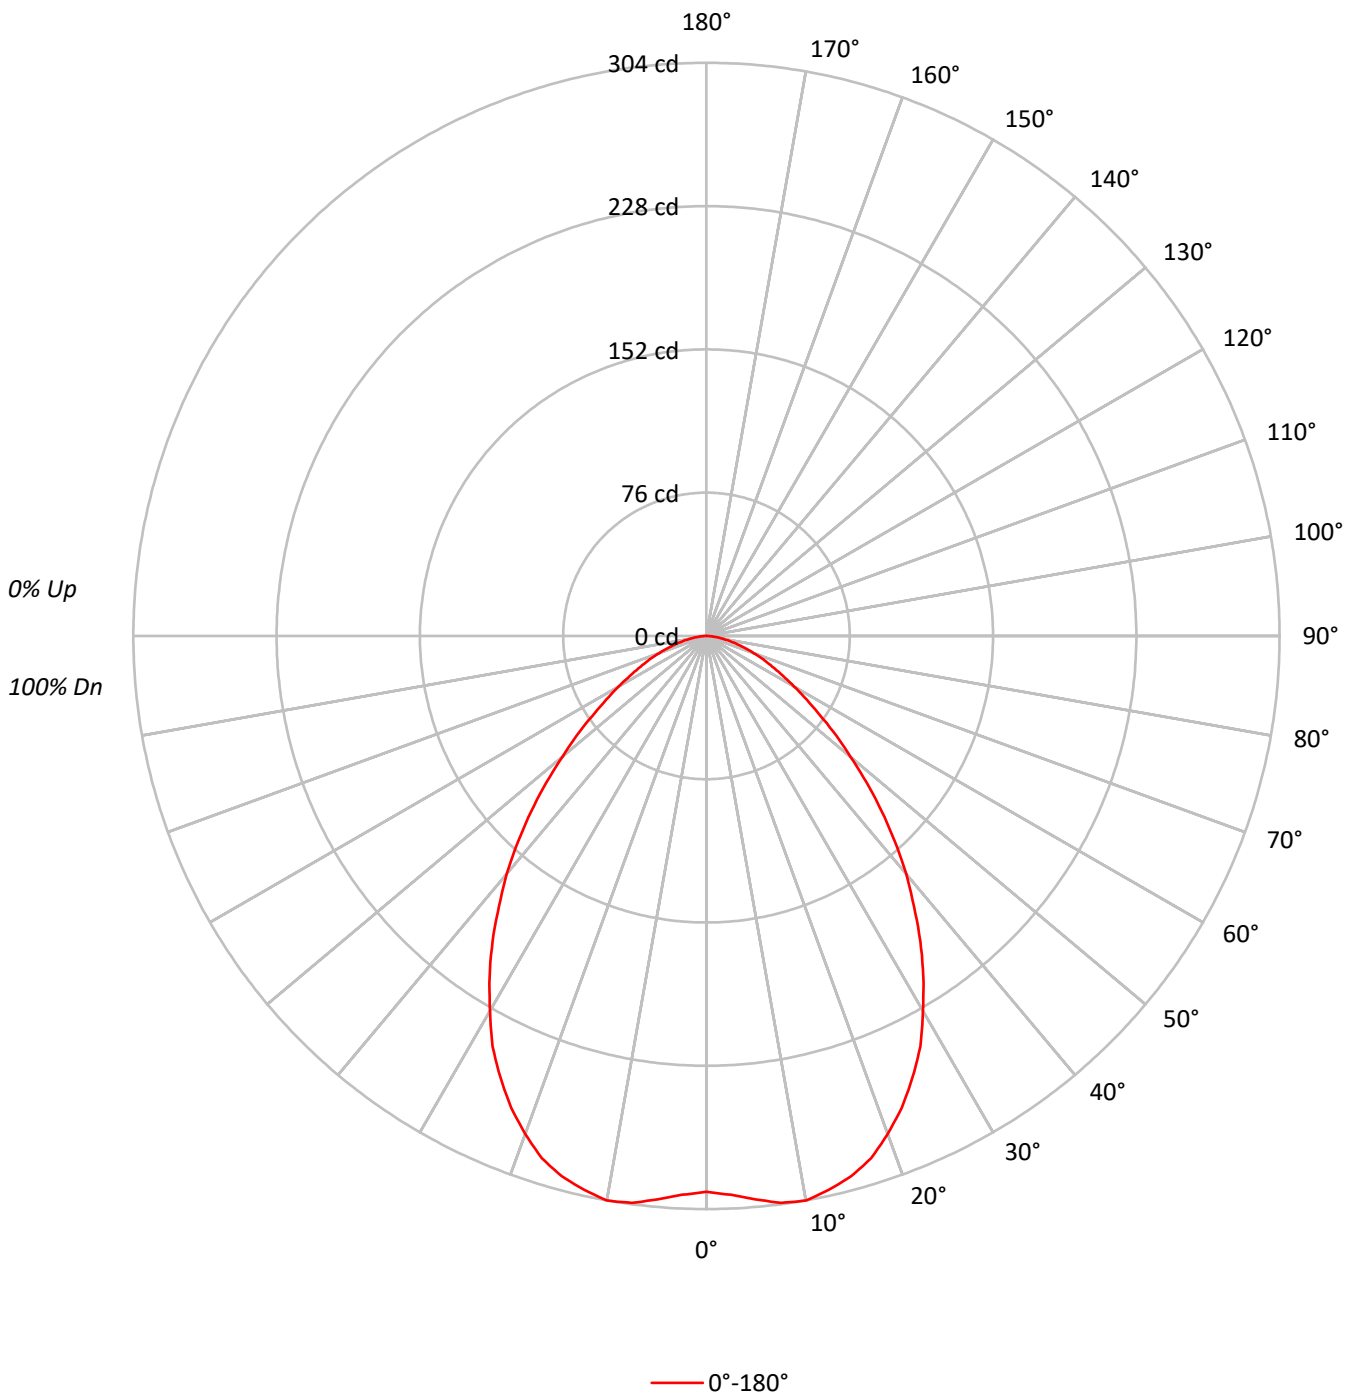



TEST NUMBER: P365221

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-MW-BTR81

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	105	101	99	101	98	96		97	95	93		93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82		87	84	80		84	81	79	77
3	95	86	79	73	93	84	78	73	81	76	71		79	74	70		76	72	69	67
4	88	77	70	64	86	76	69	64	74	68	63		72	66	62		70	65	61	59
5	82	70	62	57	80	69	62	56	67	61	56		65	60	55		64	59	55	53
6	76	64	56	50	74	63	56	50	62	55	50		60	54	49		58	53	49	47
7	71	59	51	45	69	58	51	45	57	50	45		55	49	45		54	49	44	43
8	66	54	46	41	65	54	46	41	52	46	41		51	45	41		50	45	40	39
9	62	50	43	38	61	50	42	37	48	42	37		47	41	37		46	41	37	35
10	59	47	39	34	58	46	39	34	45	39	34		44	38	34		43	38	34	32

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	21108
5°	21563
10°	22110
15°	21994
20°	21419
25°	20423
30°	18983
35°	17290
40°	15404
45°	13316
50°	11095
55°	9200
60°	7690
65°	6523
70°	5590
75°	4620
80°	3670
85°	2711



TEST NUMBER: P365221

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-MW-BTR81

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	28.8	4.9
10°-20°	83.3	14.3
20°-30°	118.5	20.3
30°-40°	123.2	21.1
40°-50°	101.3	17.4
50°-60°	66.9	11.5
60°-70°	38.8	6.6
70°-80°	18.1	3.1
80°-90°	4.1	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	230.6	39.6
0°-40°	353.9	60.7
0°-60°	522.1	89.5
0°-90°	583.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	583.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	295	
5°	300	29
15°	297	83
25°	258	119
35°	198	123
45°	132	101
55°	74	67
65°	38	39
75°	17	18
85°	3	4
90°	0	



TEST NUMBER: P365221

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-MW-BTR81

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	294.8
2.5°	296.7
5°	300.0
7.5°	303.3
10°	304.1
12.5°	300.8
15°	296.7
17.5°	290.4
20°	281.1
22.5°	270.8
25°	258.5
27.5°	245.6
30°	229.6
32.5°	214.1
35°	197.8
37.5°	180.7
40°	164.8
42.5°	147.8
45°	131.5
47.5°	115.2
50°	99.6
52.5°	86.7
55°	73.7
57.5°	63.0
60°	53.7
62.5°	45.6
65°	38.5
67.5°	32.6
70°	26.7
72.5°	21.5
75°	16.7
77.5°	12.6
80°	8.9
82.5°	5.9
85°	3.3
87.5°	1.5
90°	0.0

(END OF REPORT)