

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365933

Luminaire Tested: **FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BL84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365933
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BL84
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.125", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 971.0 lumens
Efficiency: N/A
Efficacy: 97.1 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365933

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BL84

Luminous Intensity Polar Plot

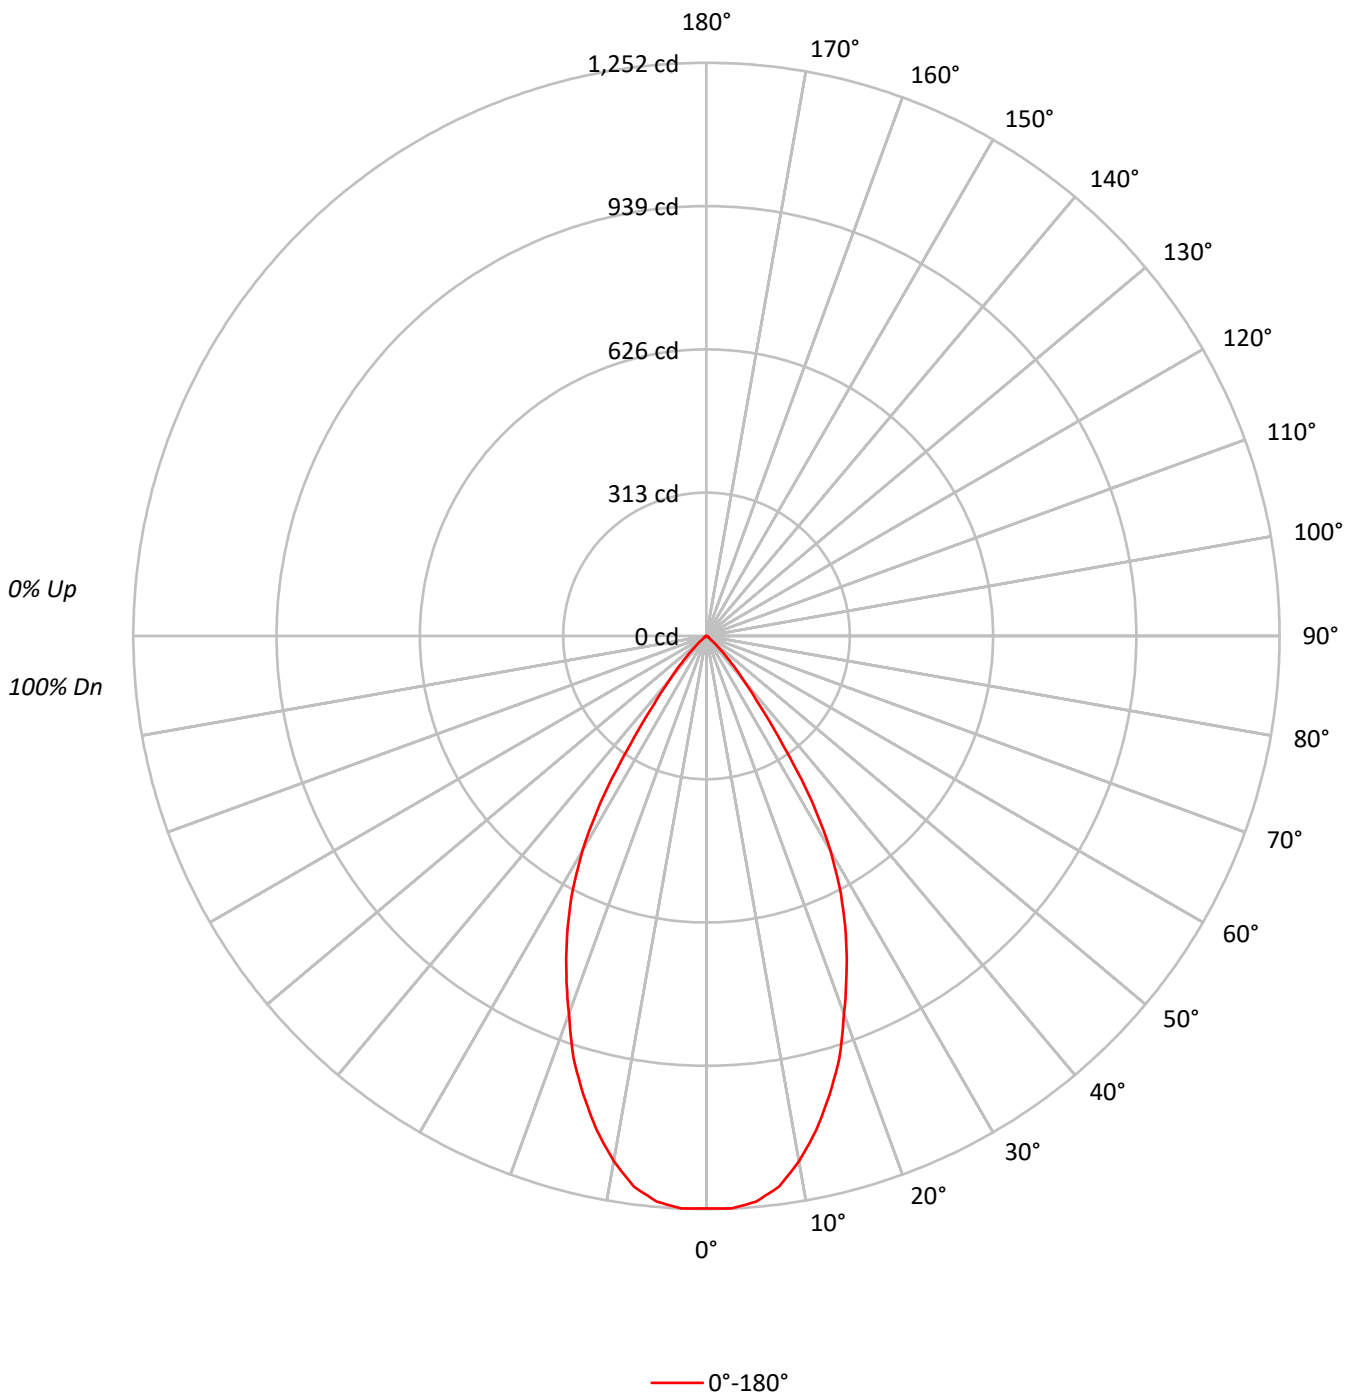



TEST NUMBER: P365933

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86	91	88	85	88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80	86	82	79	84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75	81	77	74	80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	75	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65	73	68	65	72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62	69	65	61	68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58	66	61	58	65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34158
5°	34014
10°	32313
15°	29351
20°	25539
25°	21715
30°	17083
35°	9747
40°	4386
45°	1846
50°	582
55°	176
60°	120
65°	97
70°	88
75°	116
80°	63
85°	125



TEST NUMBER: P365933

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	11.9
10°-20°	288.7	29.7
20°-30°	327.2	33.7
30°-40°	189.7	19.5
40°-50°	42.1	4.3
50°-60°	4.6	0.5
60°-70°	1.5	0.2
70°-80°	1.0	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	731.9	75.4
0°-40°	921.6	94.9
0°-60°	968.3	99.7
0°-90°	971.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	971.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1250	
5°	1240	116
15°	1038	289
25°	720	327
35°	292	190
45°	48	42
55°	4	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P365933

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	1250.5
2.5°	1251.7
5°	1240.5
7.5°	1213.5
10°	1165.0
12.5°	1106.1
15°	1037.9
17.5°	966.1
20°	878.6
22.5°	799.7
25°	720.5
27.5°	636.0
30°	541.6
32.5°	430.1
35°	292.3
37.5°	187.8
40°	123.0
42.5°	80.4
45°	47.8
47.5°	26.7
50°	13.7
52.5°	6.3
55°	3.7
57.5°	3.0
60°	2.2
62.5°	1.9
65°	1.5
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.7
80°	0.4
82.5°	0.4
85°	0.4
87.5°	0.0
90°	0.0

(END OF REPORT)