

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365944

Luminaire Tested: **FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BTR85**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365944  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BTR85  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, CLEAR 0.187", 1000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 818.9 lumens  
Efficiency: N/A  
Efficacy: 81.9 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 10  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365944

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BTR85

### Luminous Intensity Polar Plot

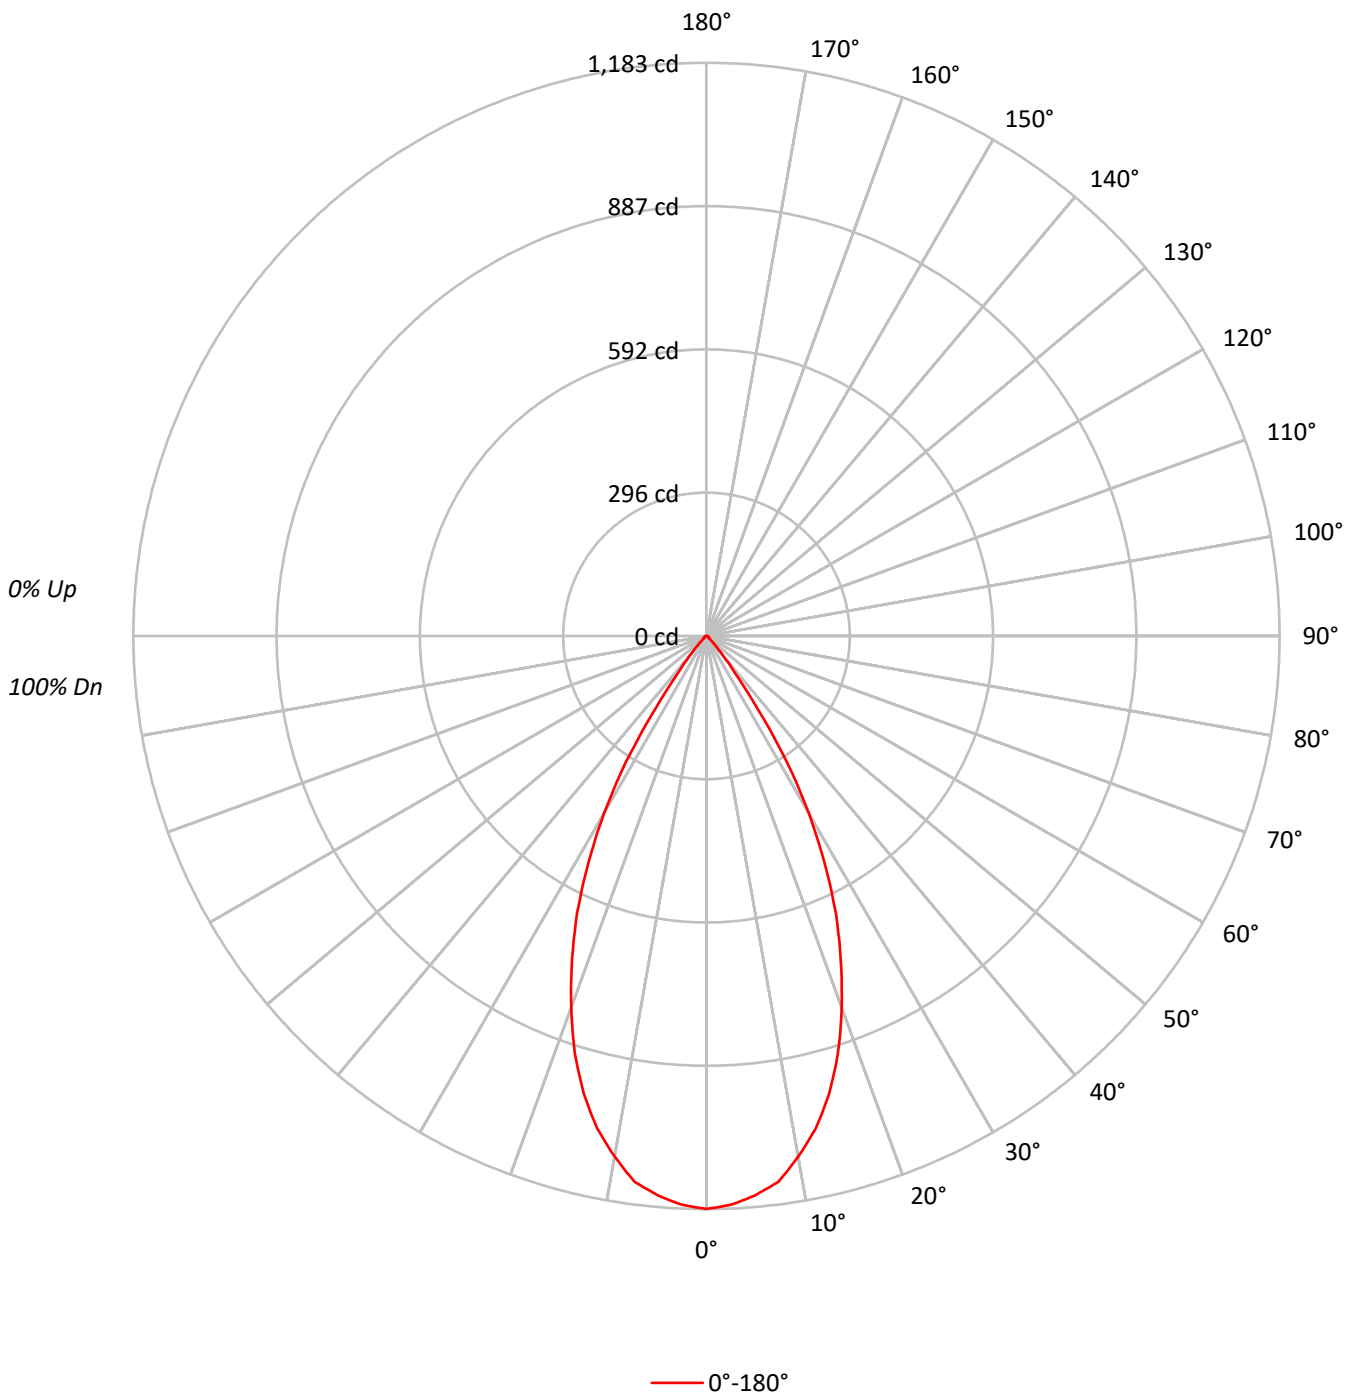



TEST NUMBER: P365944

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BTR85

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	84676
5°	83282
10°	79352
15°	72512
20°	62184
25°	49891
30°	34981
35°	16162
40°	5188
45°	1671
50°	780
55°	687
60°	687
65°	627
70°	607
75°	719
80°	907
85°	1479



TEST NUMBER: P365944

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BTR85

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	108.7	13.3
10°-20°	270.7	33.1
20°-30°	284.3	34.7
30°-40°	126.1	15.4
40°-50°	16.3	2.0
50°-60°	5.1	0.6
60°-70°	3.6	0.4
70°-80°	2.6	0.3
80°-90°	1.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	663.6	81.0
0°-40°	789.8	96.4
0°-60°	811.2	99.0
0°-90°	818.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	818.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1183	
5°	1159	109
15°	978	271
25°	632	284
35°	185	126
45°	16	16
55°	6	5
65°	4	4
75°	3	3
85°	2	2
90°	0	



TEST NUMBER: P365944

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8040-F6LBXVM1-WMH-BTR85

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1182.6
2.5°	1175.2
5°	1158.7
7.5°	1136.3
10°	1091.4
12.5°	1041.1
15°	978.2
17.5°	902.8
20°	816.1
22.5°	724.9
25°	631.5
27.5°	526.8
30°	423.1
32.5°	311.0
35°	184.9
37.5°	98.5
40°	55.5
42.5°	30.5
45°	16.5
47.5°	8.5
50°	7.0
52.5°	6.2
55°	5.5
57.5°	5.1
60°	4.8
62.5°	4.0
65°	3.7
67.5°	2.9
70°	2.9
72.5°	2.6
75°	2.6
77.5°	2.2
80°	2.2
82.5°	1.8
85°	1.8
87.5°	1.1
90°	0.0

(END OF REPORT)