

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364518

Luminaire Tested: **FLD6BX10D010-FEU6B12-8050-F6LBXVM1-LI-BTR80**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364518
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-23)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8050-F6LBXVM1-LI-BTR80
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, PATTERN 12 0.125", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 879.0 lumens
Efficiency: N/A
Efficacy: 87.9 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364518

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8050-F6LBXVM1-LI-BTR80

Luminous Intensity Polar Plot

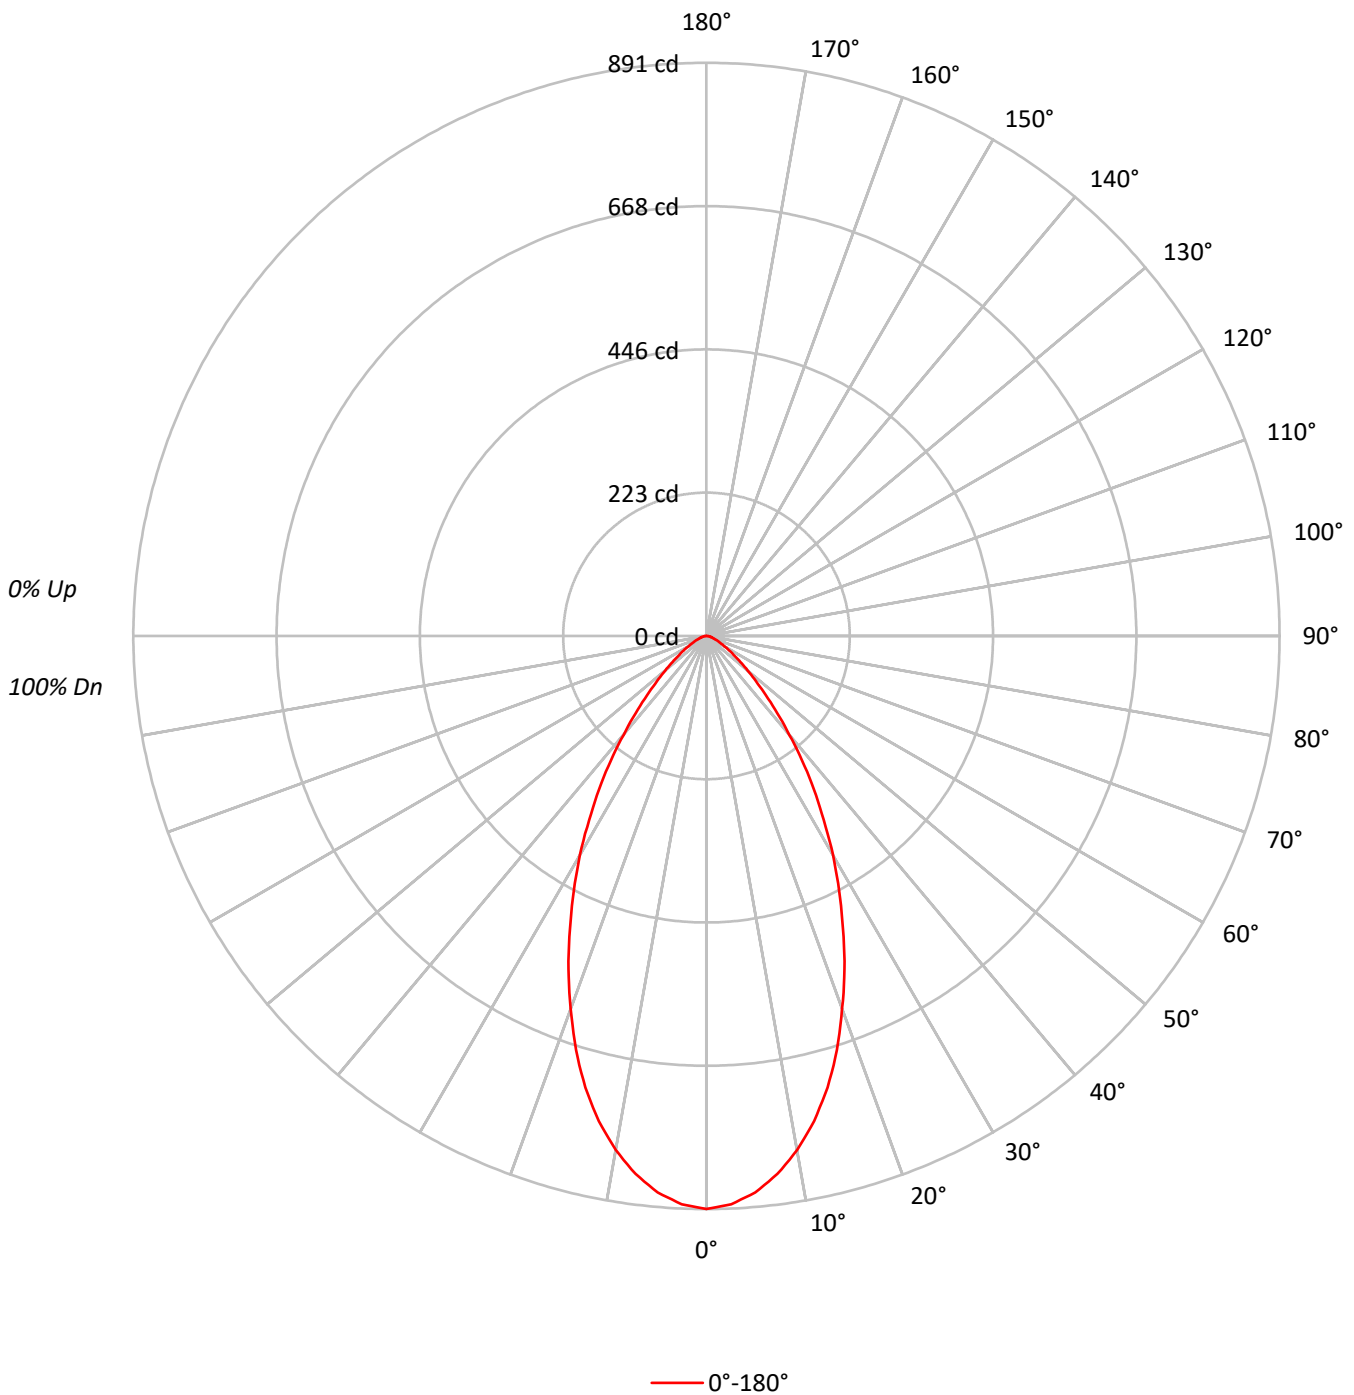



TEST NUMBER: P364518

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8050-F6LBXVM1-LI-BTR80

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69
5	88	79	72	67	87	78	72	67	76	71	67	74	70	66	73	69	65	64
6	83	73	67	62	82	73	66	62	71	65	61	69	65	61	68	64	60	59
7	79	68	62	57	77	68	61	57	66	61	57	65	60	56	64	59	56	54
8	75	64	57	53	73	63	57	53	62	57	52	61	56	52	60	55	52	50
9	71	60	54	49	69	60	53	49	59	53	49	58	52	49	57	52	49	47
10	67	57	50	46	66	56	50	46	55	50	46	54	49	46	54	49	45	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	63783
5°	62417
10°	58994
15°	53876
20°	46991
25°	39668
30°	32509
35°	25410
40°	18731
45°	13184
50°	9301
55°	6591
60°	4668
65°	3473
70°	2701
75°	2213
80°	2020
85°	2218



TEST NUMBER: P364518

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8050-F6LBXVM1-LI-BTR80

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.1	9.2
10°-20°	201.9	23.0
20°-30°	230.0	26.2
30°-40°	181.5	20.7
40°-50°	103.2	11.7
50°-60°	48.7	5.5
60°-70°	21.1	2.4
70°-80°	8.7	1.0
80°-90°	2.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	512.9	58.4
0°-40°	694.5	79.0
0°-60°	846.3	96.3
0°-90°	879.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	879.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	891	
5°	868	81
15°	727	202
25°	502	230
35°	291	182
45°	130	103
55°	53	49
65°	20	21
75°	8	9
85°	3	3
90°	0	



TEST NUMBER: P364518

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8050-F6LBXVM1-LI-BTR80

CANDELA DISTRIBUTION (FULL):

0°	
0°	890.8
2.5°	884.3
5°	868.4
7.5°	843.7
10°	811.4
12.5°	772.7
15°	726.8
17.5°	674.8
20°	616.7
22.5°	560.6
25°	502.1
27.5°	446.3
30°	393.2
32.5°	339.3
35°	290.7
37.5°	244.0
40°	200.4
42.5°	163.2
45°	130.2
47.5°	104.0
50°	83.5
52.5°	66.4
55°	52.8
57.5°	41.7
60°	32.6
62.5°	25.8
65°	20.5
67.5°	16.3
70°	12.9
72.5°	10.2
75°	8.0
77.5°	6.1
80°	4.9
82.5°	3.8
85°	2.7
87.5°	1.5
90°	0.0

(END OF REPORT)