

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364537

Luminaire Tested: **FLD6BX15D010-FEU6B12-8027-F6LBXVM1-LI-BTR81**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364537
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-25)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-LI-BTR81
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1031.0 lumens
Efficiency: N/A
Efficacy: 72.6 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.19
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364537

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-LI-BTR81

Luminous Intensity Polar Plot

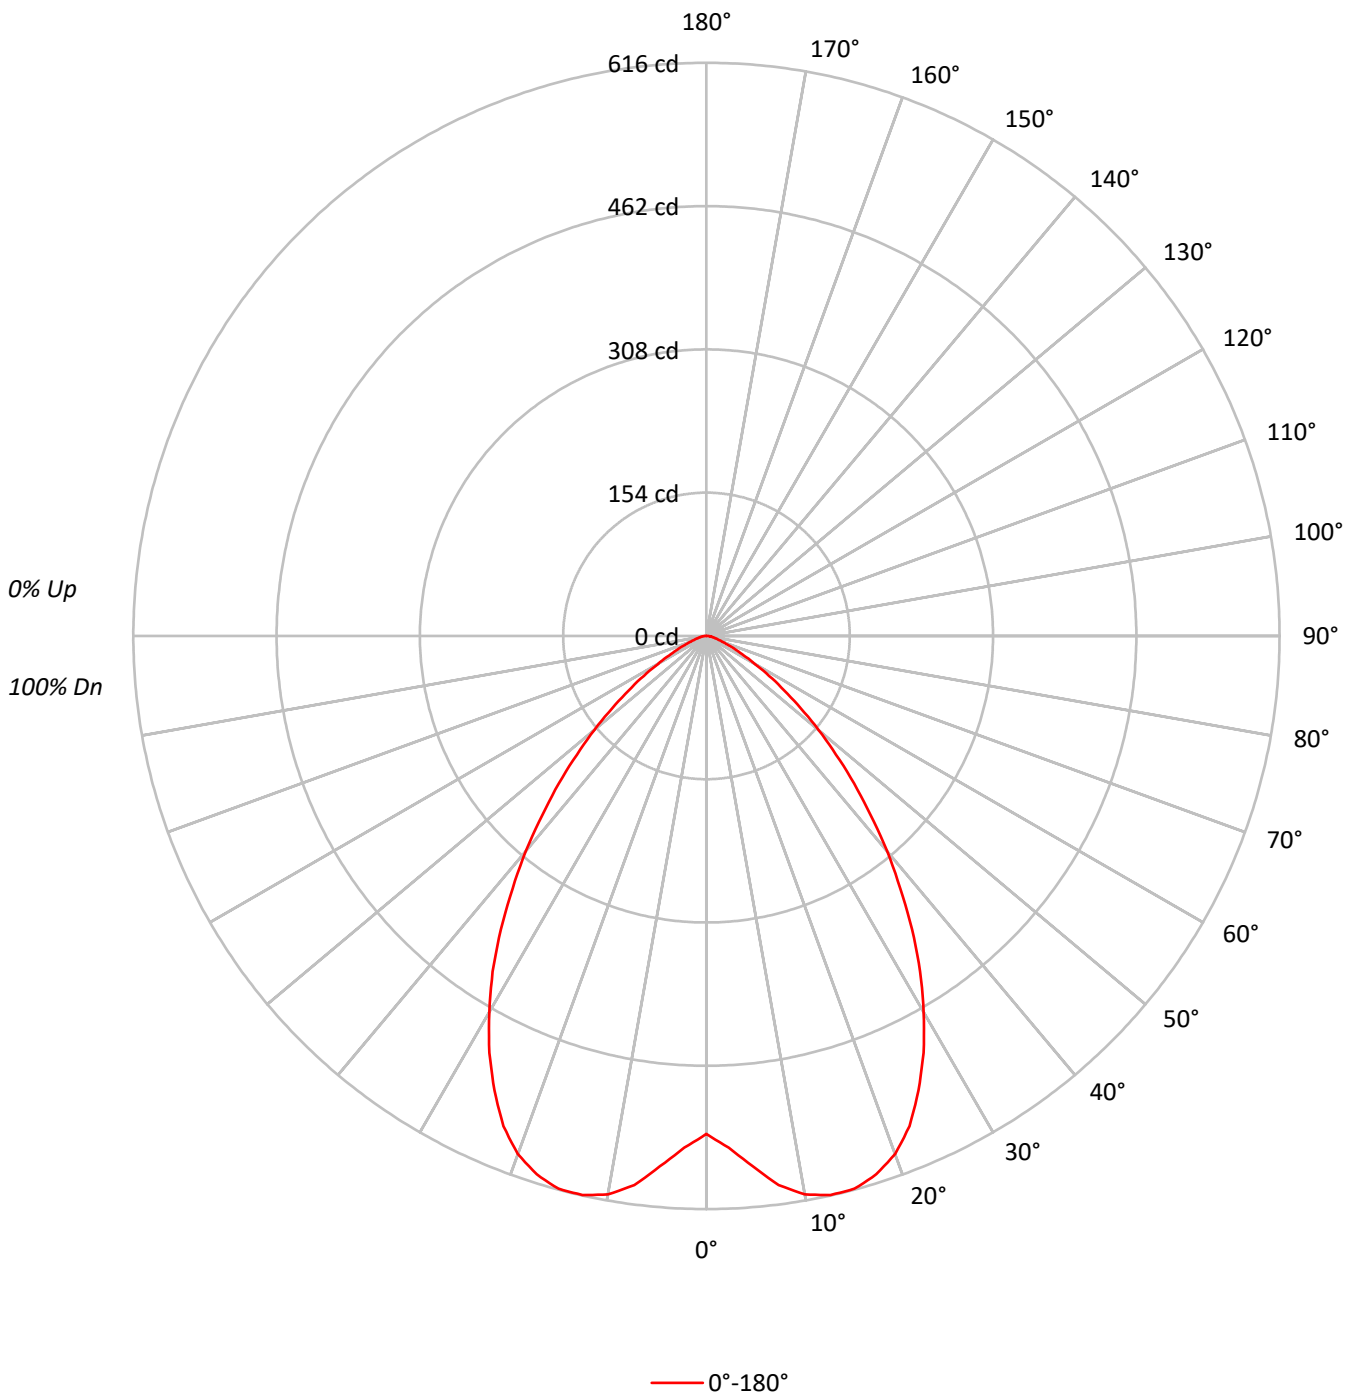



TEST NUMBER: P364537

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-LI-BTR81

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80	76	73	72
4	91	81	74	69	89	80	73	68	78	72	68		75	71	67		73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	61		69	64	60		68	63	59	58
6	79	68	61	55	77	67	60	55	66	59	55		64	58	54		63	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50		59	54	49		58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	42		51	46	41		50	45	41	40
10	62	50	43	39	61	50	43	38	49	43	38		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	38314
5°	41120
10°	44315
15°	45596
20°	45154
25°	42575
30°	38603
35°	33661
40°	28218
45°	22713
50°	17489
55°	12721
60°	8635
65°	5710
70°	3726
75°	2849
80°	2515
85°	3040



TEST NUMBER: P364537

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-LI-BTR81

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.9	5.4
10°-20°	172.6	16.7
20°-30°	246.4	23.9
30°-40°	239.7	23.2
40°-50°	173.4	16.8
50°-60°	92.9	9.0
60°-70°	35.1	3.4
70°-80°	11.5	1.1
80°-90°	3.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	474.8	46.1
0°-40°	714.5	69.3
0°-60°	980.8	95.1
0°-90°	1031.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1031.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	535	
5°	572	56
15°	615	173
25°	539	246
35°	385	240
45°	224	173
55°	102	93
65°	34	35
75°	10	12
85°	4	4
90°	0	



TEST NUMBER: P364537

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-LI-BTR81

CANDELA DISTRIBUTION (FULL):

	0°
0°	535.1
2.5°	550.6
5°	572.1
7.5°	595.4
10°	609.5
12.5°	615.5
15°	615.1
17.5°	606.7
20°	592.6
22.5°	570.2
25°	538.9
27.5°	505.2
30°	466.9
32.5°	427.6
35°	385.1
37.5°	342.1
40°	301.9
42.5°	260.8
45°	224.3
47.5°	188.8
50°	157.0
52.5°	127.6
55°	101.9
57.5°	79.9
60°	60.3
62.5°	45.3
65°	33.7
67.5°	24.3
70°	17.8
72.5°	13.6
75°	10.3
77.5°	7.9
80°	6.1
82.5°	4.7
85°	3.7
87.5°	1.9
90°	0.0

(END OF REPORT)