

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365986

Luminaire Tested: **FLD6BX15D010-FEU6B12-8027-F6LBXVM1-WMH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365986
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-11)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-WMH
Description: VANDAL RESISTANT OPEN, WARM HAZE REFLECTOR, 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1337.0 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.84
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365986

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-WMH

Luminous Intensity Polar Plot

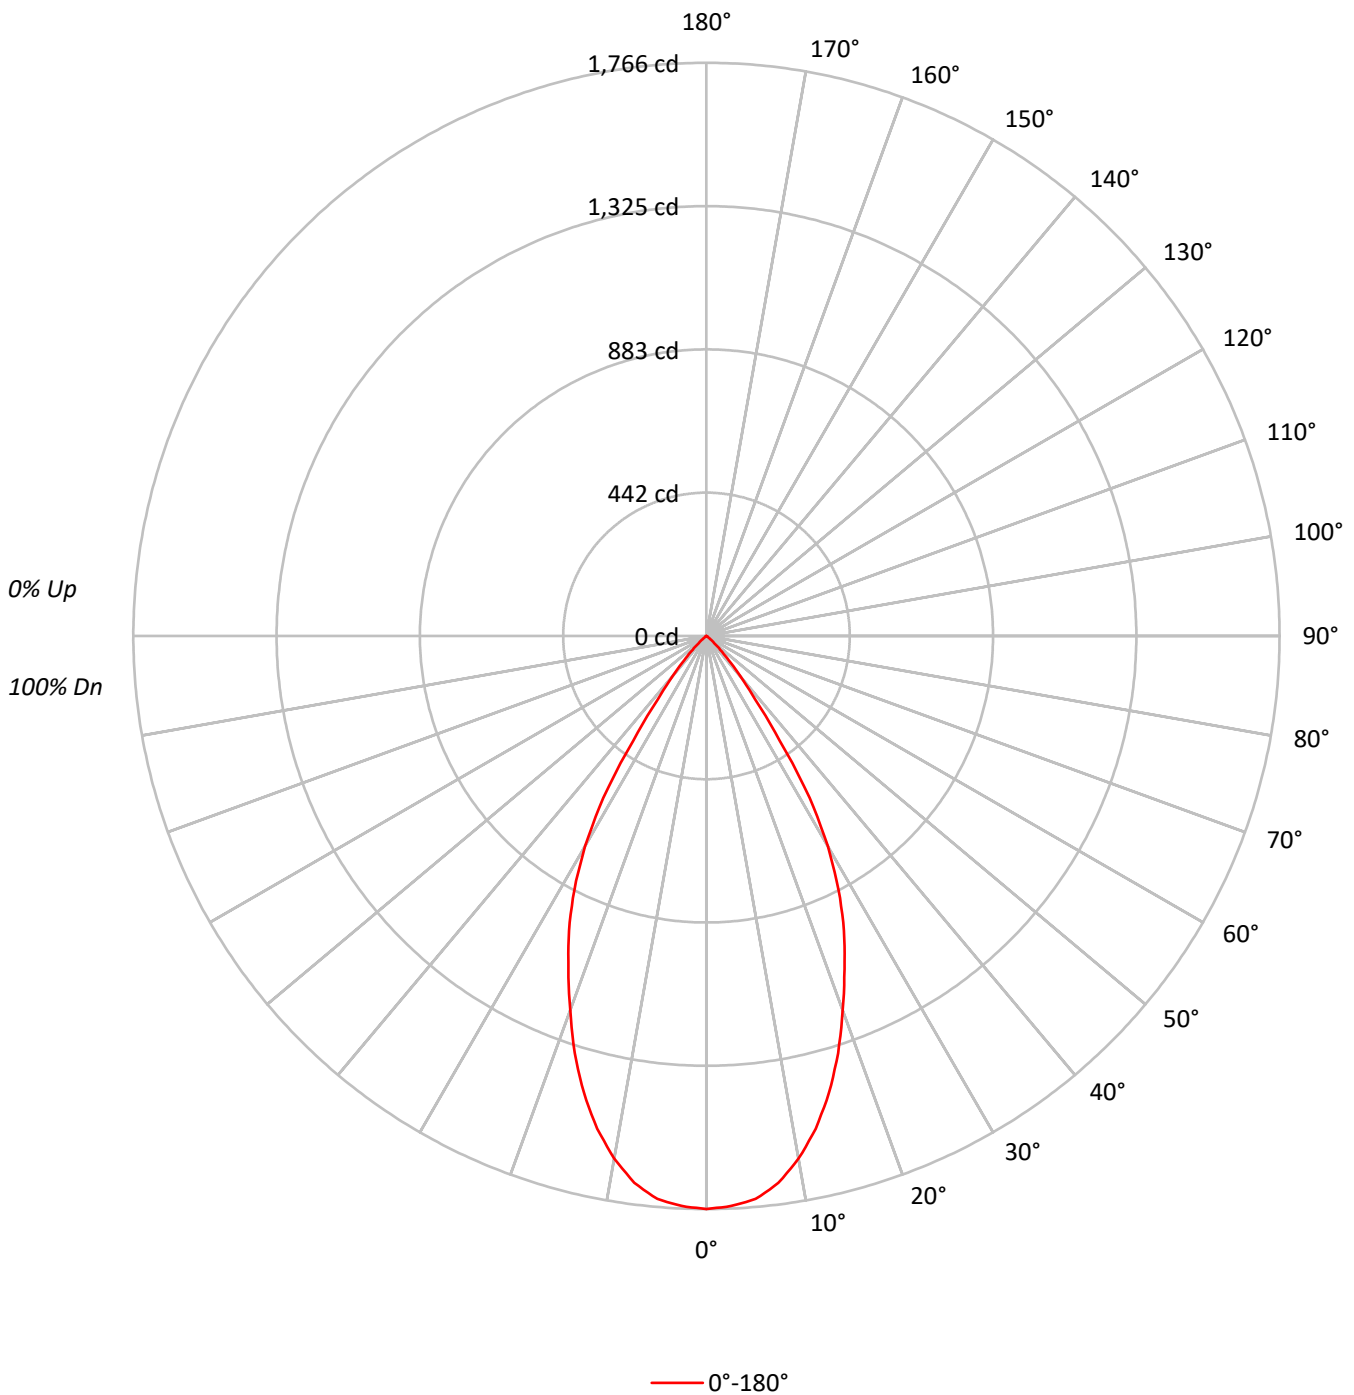



TEST NUMBER: P365986

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	82
4	98	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	72
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64
8	81	72	66	63	80	72	66	62	71	66	62	70	65	62	69	65	62	60
9	78	68	63	59	77	68	62	59	67	62	59	66	62	58	65	61	58	57
10	74	65	59	56	73	64	59	56	64	59	55	63	58	55	62	58	55	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48233
5°	47751
10°	45361
15°	41236
20°	35673
25°	30211
30°	23580
35°	13125
40°	5752
45°	2310
50°	637
55°	110
60°	76
65°	58
70°	40
75°	53
80°	0
85°	0



TEST NUMBER: P365986

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.8	12.2
10°-20°	404.6	30.3
20°-30°	454.5	34.0
30°-40°	257.1	19.2
40°-50°	53.0	4.0
50°-60°	3.8	0.3
60°-70°	0.8	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1021.9	76.4
0°-40°	1279.0	95.7
0°-60°	1335.9	99.9
0°-90°	1337.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1337.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1766	
5°	1742	163
15°	1458	405
25°	1002	454
35°	394	257
45°	60	53
55°	2	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P365986

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8027-F6LBXVM1-WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1765.8
2.5°	1758.3
5°	1741.5
7.5°	1699.9
10°	1635.4
12.5°	1555.0
15°	1458.2
17.5°	1348.3
20°	1227.2
22.5°	1111.3
25°	1002.4
27.5°	881.7
30°	747.6
32.5°	591.4
35°	393.6
37.5°	246.8
40°	161.3
42.5°	101.9
45°	59.8
47.5°	31.8
50°	15.0
52.5°	5.1
55°	2.3
57.5°	1.9
60°	1.4
62.5°	0.9
65°	0.9
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)