

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365270

Luminaire Tested: **FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BL87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365270
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-39)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BL87
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.375", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1062.0 lumens
Efficiency: N/A
Efficacy: 74.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365270

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BL87

Luminous Intensity Polar Plot

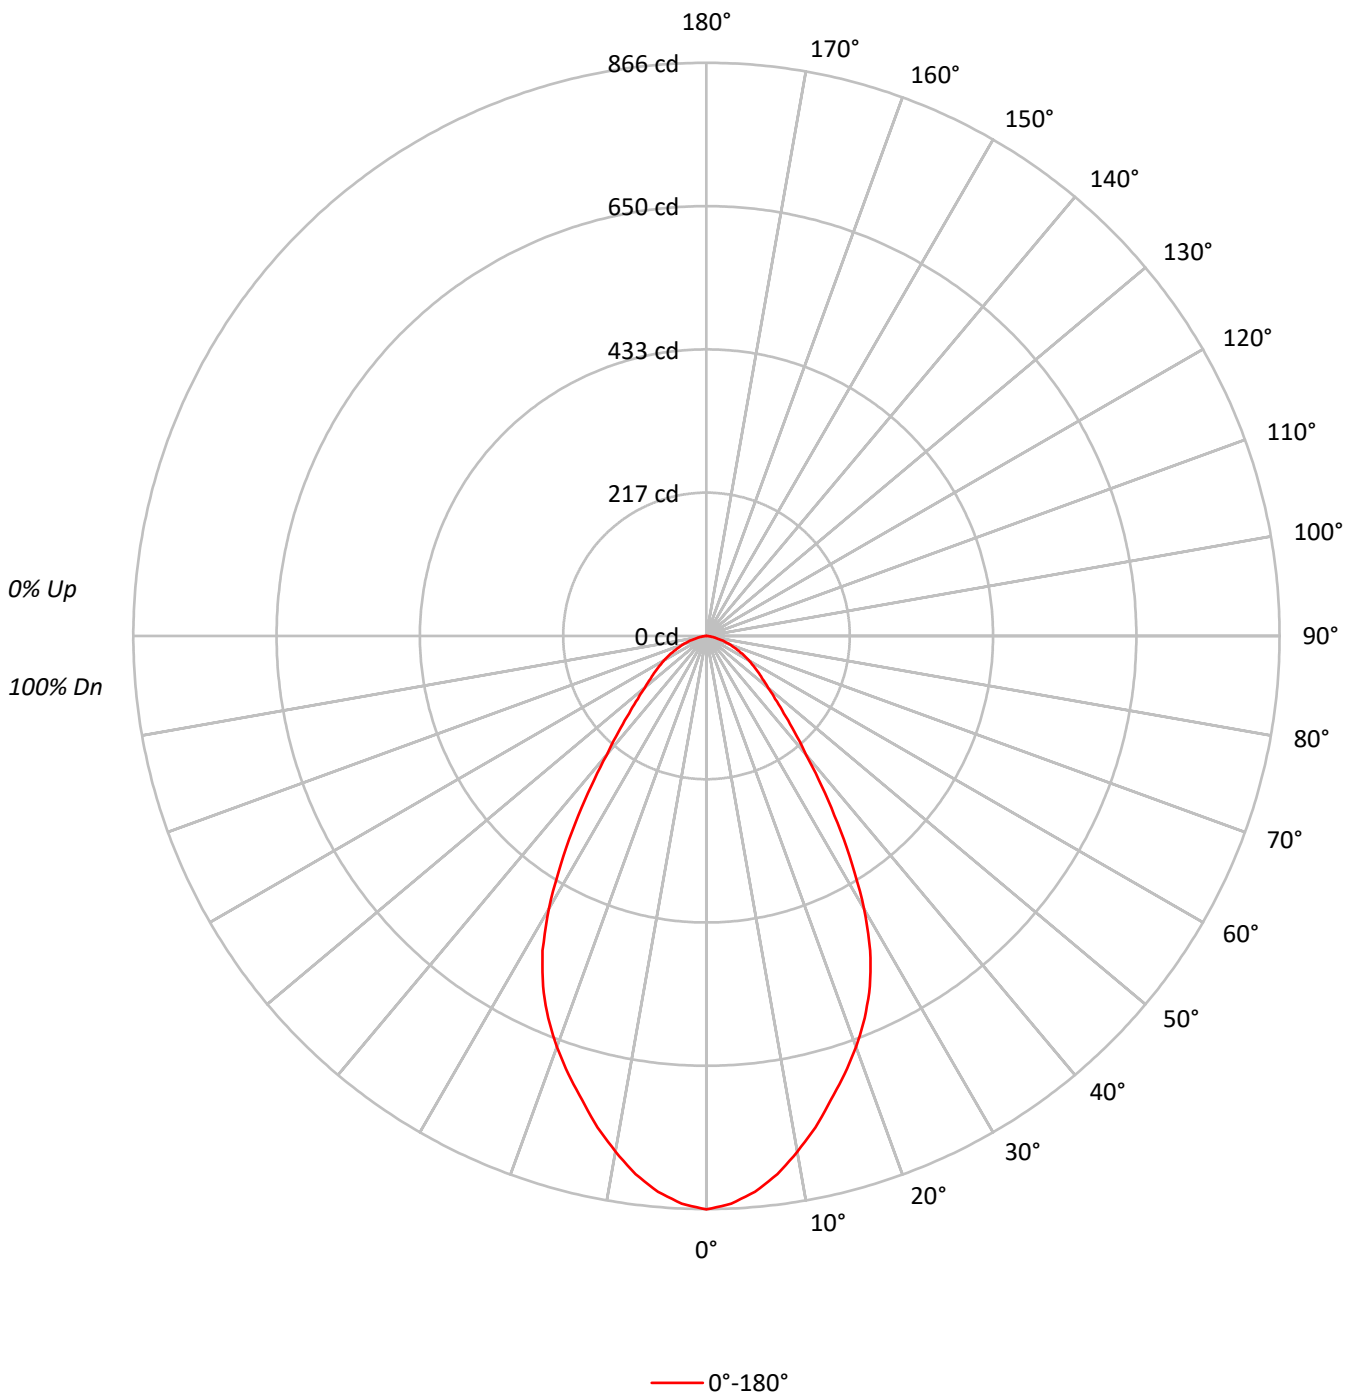



TEST NUMBER: P365270

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BL87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	98	89	83	78	95	88	82	78	85	80	76		83	78	75		80	77	74	72
4	91	82	75	70	89	81	74	69	78	73	68		76	71	68		74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62		70	65	61		69	64	61	59
6	80	69	62	57	79	69	62	57	67	61	56		65	60	56		64	59	56	54
7	75	64	57	52	74	64	57	52	62	56	52		61	55	51		60	55	51	49
8	71	60	53	48	70	59	53	48	58	52	48		57	51	47		56	51	47	46
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	23666
5°	23112
10°	21942
15°	20522
20°	19205
25°	17613
30°	15026
35°	11504
40°	8365
45°	6382
50°	5172
55°	4538
60°	4032
65°	3503
70°	2963
75°	2322
80°	1542
85°	627



TEST NUMBER: P365270

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BL87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.8	7.4
10°-20°	204.1	19.2
20°-30°	265.3	25.0
30°-40°	216.2	20.4
40°-50°	130.6	12.3
50°-60°	85.7	8.1
60°-70°	54.1	5.1
70°-80°	23.7	2.2
80°-90°	3.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	548.2	51.6
0°-40°	764.4	72.0
0°-60°	980.7	92.3
0°-90°	1062.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1062.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	866	
5°	843	79
15°	726	204
25°	584	265
35°	345	216
45°	165	131
55°	95	86
65°	54	54
75°	22	24
85°	2	3
90°	0	



TEST NUMBER: P365270

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BL87

CANDELA DISTRIBUTION (FULL):

	0°
0°	866.4
2.5°	858.6
5°	842.9
7.5°	820.5
10°	791.1
12.5°	760.8
15°	725.7
17.5°	693.9
20°	660.7
22.5°	625.0
25°	584.4
27.5°	536.1
30°	476.4
32.5°	410.0
35°	345.0
37.5°	285.4
40°	234.6
42.5°	196.4
45°	165.2
47.5°	140.7
50°	121.7
52.5°	107.0
55°	95.3
57.5°	84.0
60°	73.8
62.5°	64.0
65°	54.2
67.5°	45.4
70°	37.1
72.5°	29.3
75°	22.0
77.5°	15.1
80°	9.8
82.5°	5.4
85°	2.0
87.5°	0.5
90°	0.0

(END OF REPORT)