

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365276

Luminaire Tested: **FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365276
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 789.1 lumens
Efficiency: N/A
Efficacy: 55.6 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.09
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365276

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BTR82

Luminous Intensity Polar Plot

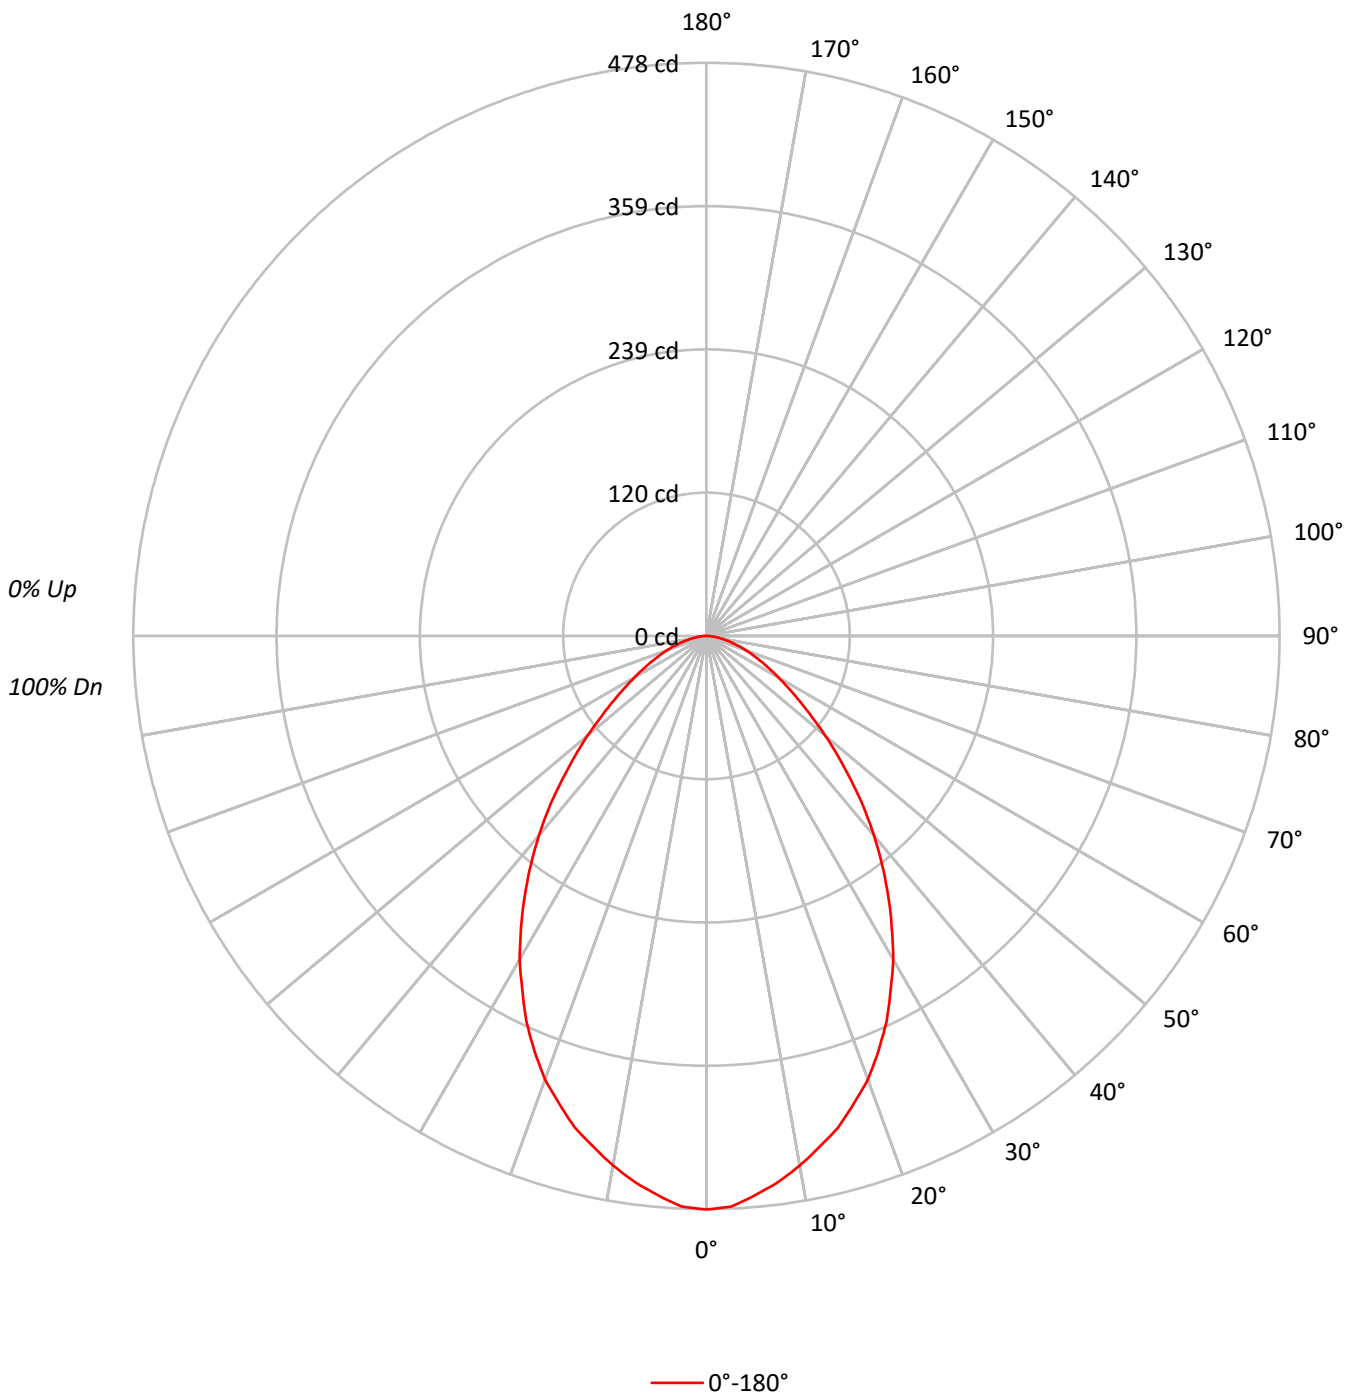



TEST NUMBER: P365276

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77
3	95	86	79	74	93	85	78	73	82	77	72	79	75	71	77	73	70	68
4	88	78	71	65	86	77	70	64	74	68	64	72	67	63	70	66	62	60
5	82	71	63	58	80	70	63	57	68	62	57	66	61	56	64	59	56	54
6	77	65	57	52	75	64	57	51	62	56	51	61	55	50	59	54	50	48
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46	55	50	45	44
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40
9	63	51	44	39	62	51	43	39	49	43	38	48	42	38	47	42	38	36
10	60	48	40	36	58	47	40	36	46	40	35	45	39	35	44	39	35	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34247
5°	33645
10°	32609
15°	31467
20°	29999
25°	28054
30°	25763
35°	23085
40°	20302
45°	17285
50°	14436
55°	11847
60°	9953
65°	8454
70°	7369
75°	6225
80°	5031
85°	4026



TEST NUMBER: P365276

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.1	5.6
10°-20°	119.0	15.1
20°-30°	162.6	20.6
30°-40°	164.8	20.9
40°-50°	132.2	16.8
50°-60°	86.1	10.9
60°-70°	50.3	6.4
70°-80°	24.2	3.1
80°-90°	5.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	325.7	41.3
0°-40°	490.5	62.2
0°-60°	708.8	89.8
0°-90°	789.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	789.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	478	
5°	468	44
15°	424	119
25°	355	163
35°	264	165
45°	171	132
55°	95	86
65°	50	50
75°	22	24
85°	5	6
90°	0	



TEST NUMBER: P365276

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-MW-BTR82

CANDELA DISTRIBUTION (FULL):

0°	
0°	478.3
2.5°	476.4
5°	468.1
7.5°	459.3
10°	448.5
12.5°	436.3
15°	424.5
17.5°	408.9
20°	393.7
22.5°	374.6
25°	355.1
27.5°	332.6
30°	311.6
32.5°	287.6
35°	264.1
37.5°	240.6
40°	217.2
42.5°	194.2
45°	170.7
47.5°	149.2
50°	129.6
52.5°	110.5
55°	94.9
57.5°	81.2
60°	69.5
62.5°	59.2
65°	49.9
67.5°	42.1
70°	35.2
72.5°	28.4
75°	22.5
77.5°	17.1
80°	12.2
82.5°	8.3
85°	4.9
87.5°	2.0
90°	0.0

(END OF REPORT)