

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365990

Luminaire Tested: **FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BL87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365990
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BL87
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.375", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1209.0 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365990

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BL87

Luminous Intensity Polar Plot

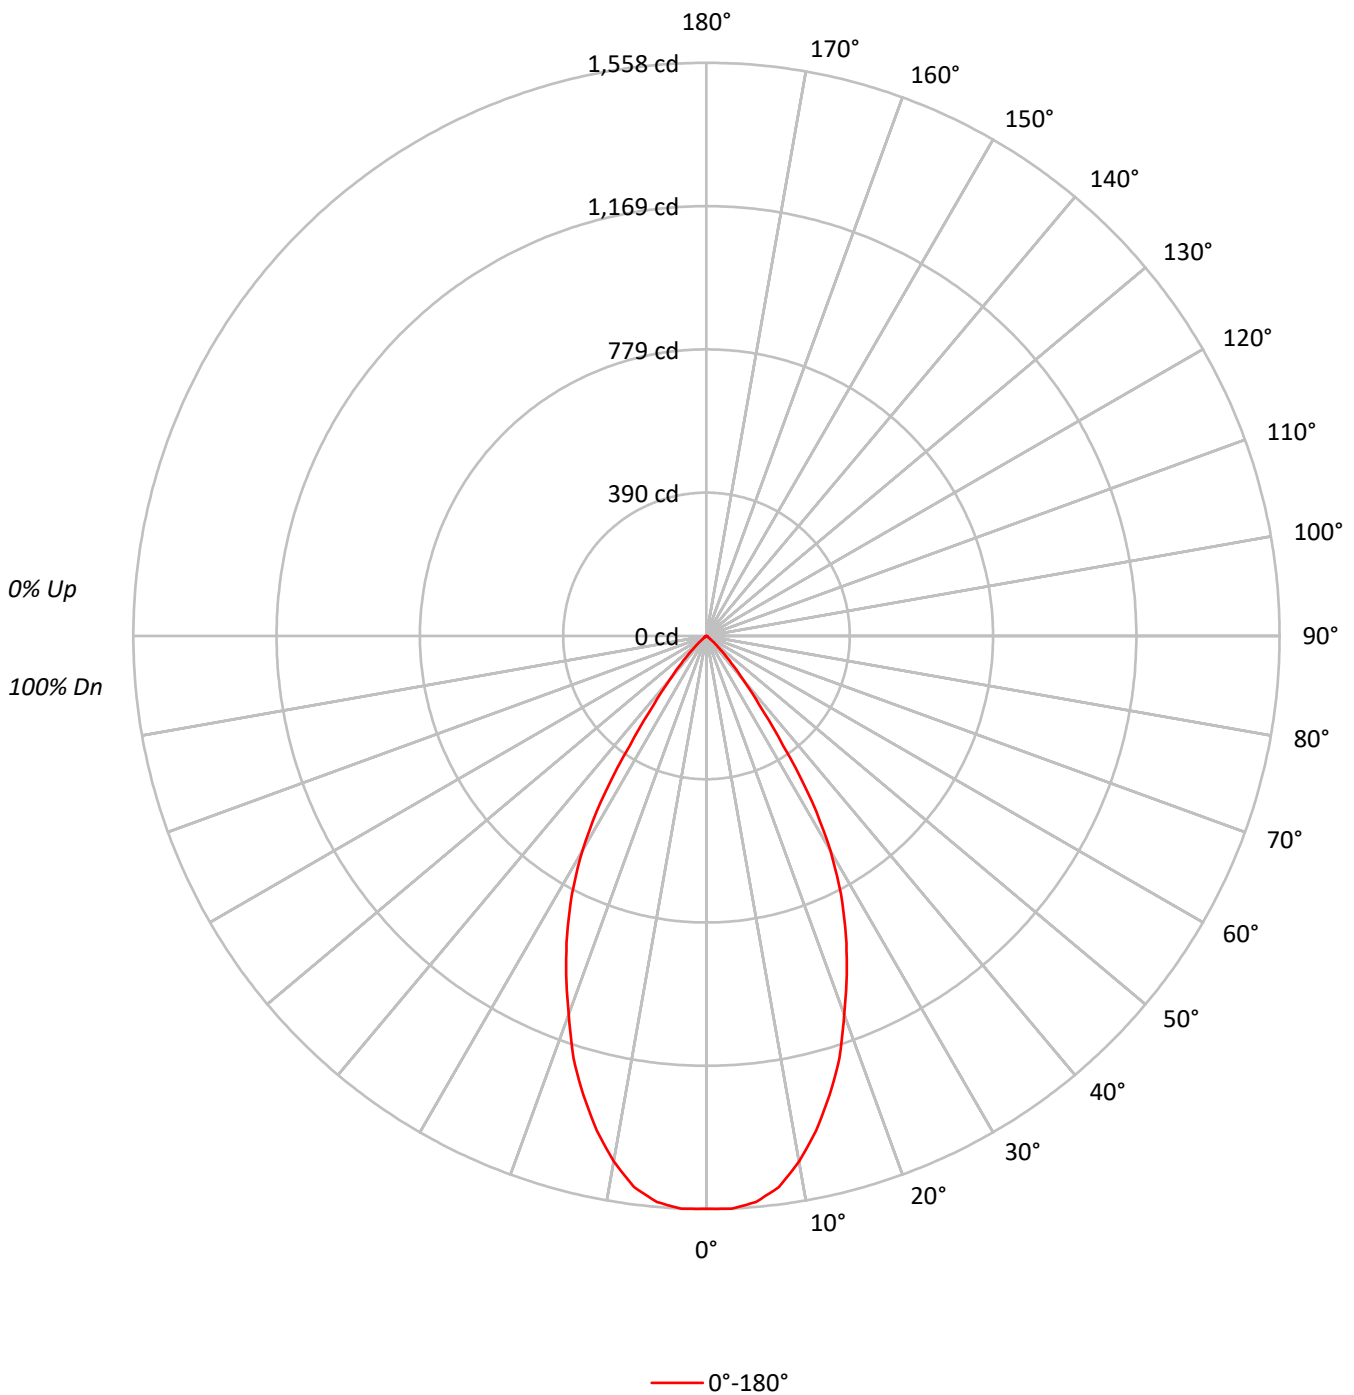



TEST NUMBER: P365990

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BL87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		75	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	42533
5°	42352
10°	40232
15°	36545
20°	31801
25°	27038
30°	21268
35°	12135
40°	5459
45°	2298
50°	727
55°	219
60°	153
65°	116
70°	112
75°	148
80°	79
85°	157



TEST NUMBER: P365990

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BL87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.5	11.9
10°-20°	359.5	29.7
20°-30°	407.4	33.7
30°-40°	236.2	19.5
40°-50°	52.4	4.3
50°-60°	5.7	0.5
60°-70°	1.9	0.2
70°-80°	1.2	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	911.3	75.4
0°-40°	1147.5	94.9
0°-60°	1205.6	99.7
0°-90°	1209.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1209.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1557	
5°	1545	144
15°	1292	359
25°	897	407
35°	364	236
45°	60	52
55°	5	6
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P365990

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BL87

CANDELA DISTRIBUTION (FULL):

	0°
0°	1557.1
2.5°	1558.5
5°	1544.6
7.5°	1510.9
10°	1450.5
12.5°	1377.2
15°	1292.3
17.5°	1202.9
20°	1094.0
22.5°	995.8
25°	897.1
27.5°	791.9
30°	674.3
32.5°	535.5
35°	363.9
37.5°	233.8
40°	153.1
42.5°	100.1
45°	59.5
47.5°	33.2
50°	17.1
52.5°	7.8
55°	4.6
57.5°	3.7
60°	2.8
62.5°	2.3
65°	1.8
67.5°	1.4
70°	1.4
72.5°	1.4
75°	1.4
77.5°	0.9
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)