

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365996

Luminaire Tested: **FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365996  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 1500LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1050.0 lumens  
Efficiency: N/A  
Efficacy: 73.9 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365996

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

### Luminous Intensity Polar Plot

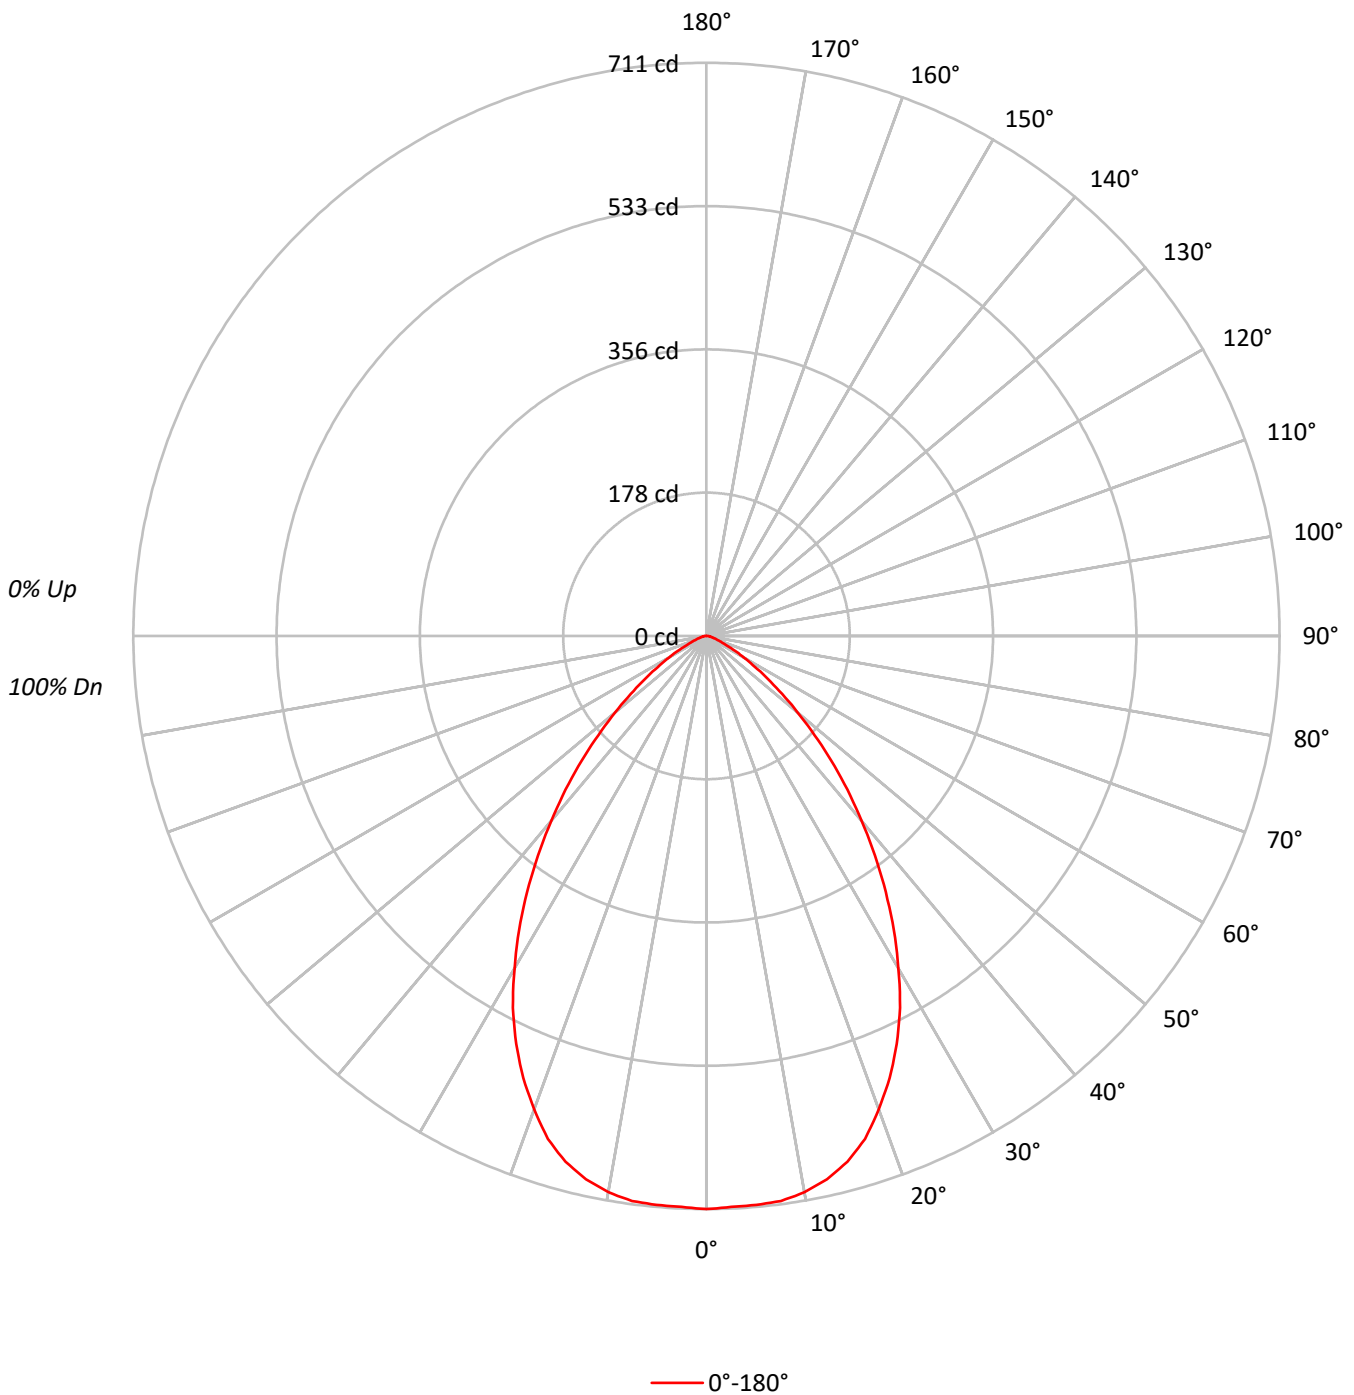



TEST NUMBER: P365996

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	50902
5°	50924
10°	50945
15°	50051
20°	47616
25°	44116
30°	39372
35°	33889
40°	27966
45°	22136
50°	16453
55°	11597
60°	7704
65°	4727
70°	3077
75°	2296
80°	2020
85°	2382



TEST NUMBER: P365996

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	67.4	6.4
10°-20°	189.0	18.0
20°-30°	255.2	24.3
30°-40°	241.5	23.0
40°-50°	169.3	16.1
50°-60°	85.2	8.1
60°-70°	30.1	2.9
70°-80°	9.4	0.9
80°-90°	2.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	511.7	48.7
0°-40°	753.1	71.7
0°-60°	1007.6	96.0
0°-90°	1050.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1050.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	711	
5°	708	67
15°	675	189
25°	558	255
35°	388	241
45°	219	169
55°	93	85
65°	28	30
75°	8	9
85°	3	3
90°	0	



TEST NUMBER: P365996

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR82

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	710.9
2.5°	709.0
5°	708.5
7.5°	707.0
10°	700.7
12.5°	690.4
15°	675.2
17.5°	654.2
20°	624.9
22.5°	593.6
25°	558.4
27.5°	520.2
30°	476.2
32.5°	432.7
35°	387.7
37.5°	343.2
40°	299.2
42.5°	258.7
45°	218.6
47.5°	181.9
50°	147.7
52.5°	118.3
55°	92.9
57.5°	71.4
60°	53.8
62.5°	39.6
65°	27.9
67.5°	20.5
70°	14.7
72.5°	11.2
75°	8.3
77.5°	6.4
80°	4.9
82.5°	3.9
85°	2.9
87.5°	1.5
90°	0.0

(END OF REPORT)