

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365294

Luminaire Tested: **FLD6BX15D010-FEU6B12-8035-F6LBXVM1-MW-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365294
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-MW-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 805.0 lumens
Efficiency: N/A
Efficacy: 56.7 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.09
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365294

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-MW-BTR82

Luminous Intensity Polar Plot

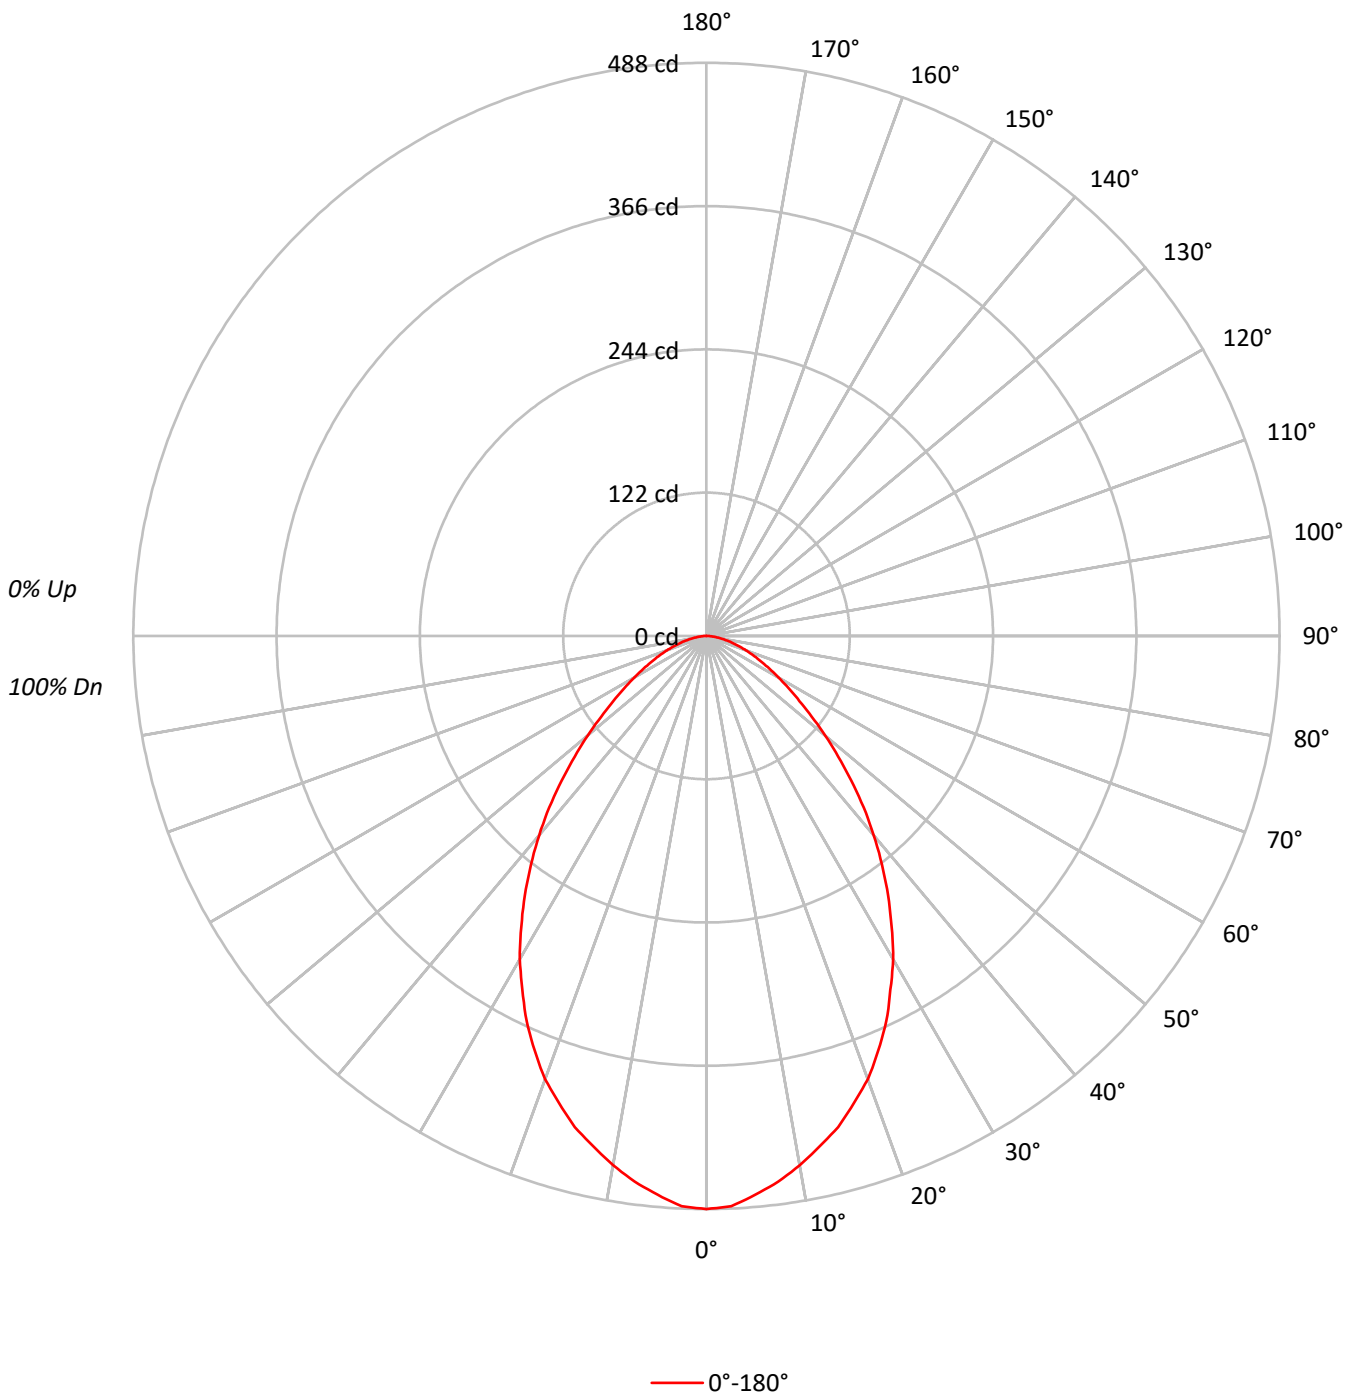



TEST NUMBER: P365294

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-MW-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	104	100	108	105	102	99	101	98	96		97	95	93		93	92	90	88
2	103	96	90	86	100	94	89	85	91	86	83		88	84	81		85	82	79	77
3	95	86	79	74	93	85	78	73	82	77	72		79	75	71		77	73	70	68
4	88	78	71	65	86	77	70	64	74	68	64		72	67	63		70	66	62	60
5	82	71	63	58	80	70	63	57	68	62	57		66	61	56		64	59	56	54
6	77	65	57	52	75	64	57	51	62	56	51		61	55	50		59	54	50	48
7	72	60	52	46	70	59	52	46	57	51	46		56	50	46		55	50	45	44
8	67	55	47	42	66	54	47	42	53	47	42		52	46	42		51	46	41	40
9	63	51	44	39	62	51	43	39	49	43	38		48	42	38		47	42	38	36
10	60	48	40	36	58	47	40	36	46	40	35		45	39	35		44	39	35	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34942
5°	34328
10°	33270
15°	32105
20°	30608
25°	28623
30°	26284
35°	23557
40°	20713
45°	17640
50°	14726
55°	12084
60°	10153
65°	8624
70°	7516
75°	6363
80°	5154
85°	4108



TEST NUMBER: P365294

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-MW-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.0	5.6
10°-20°	121.4	15.1
20°-30°	165.9	20.6
30°-40°	168.1	20.9
40°-50°	134.8	16.8
50°-60°	87.8	10.9
60°-70°	51.3	6.4
70°-80°	24.7	3.1
80°-90°	5.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	332.3	41.3
0°-40°	500.5	62.2
0°-60°	723.2	89.8
0°-90°	805.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	805.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	488	
5°	478	45
15°	433	121
25°	362	166
35°	270	168
45°	174	135
55°	97	88
65°	51	51
75°	23	25
85°	5	6
90°	0	



TEST NUMBER: P365294

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-MW-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	488.0
2.5°	486.0
5°	477.6
7.5°	468.6
10°	457.6
12.5°	445.1
15°	433.1
17.5°	417.2
20°	401.7
22.5°	382.2
25°	362.3
27.5°	339.3
30°	317.9
32.5°	293.4
35°	269.5
37.5°	245.5
40°	221.6
42.5°	198.1
45°	174.2
47.5°	152.2
50°	132.2
52.5°	112.8
55°	96.8
57.5°	82.8
60°	70.9
62.5°	60.4
65°	50.9
67.5°	42.9
70°	35.9
72.5°	28.9
75°	23.0
77.5°	17.5
80°	12.5
82.5°	8.5
85°	5.0
87.5°	2.0
90°	0.0

(END OF REPORT)