

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366014

Luminaire Tested: **FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366014
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1071.0 lumens
Efficiency: N/A
Efficacy: 75.4 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366014

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH-BTR82

Luminous Intensity Polar Plot

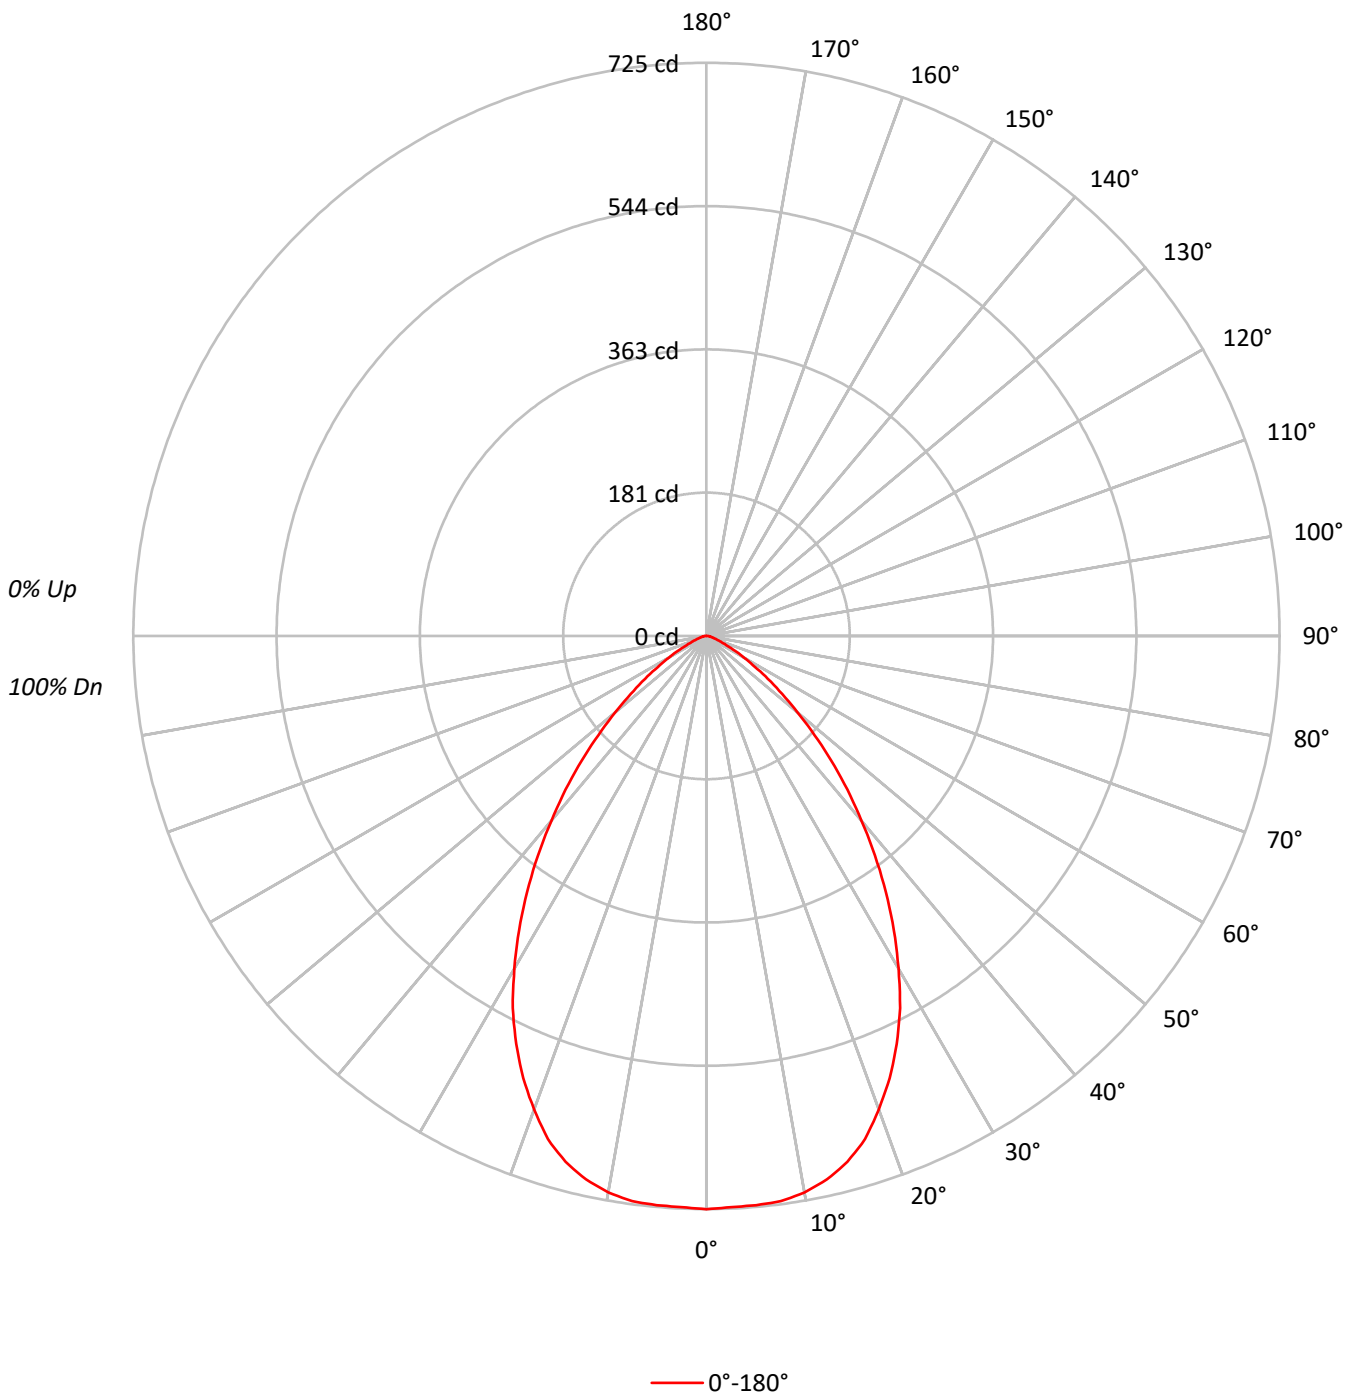



TEST NUMBER: P366014

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	51926
5°	51944
10°	51963
15°	51052
20°	48568
25°	44993
30°	40165
35°	34571
40°	28527
45°	22571
50°	16776
55°	11834
60°	7862
65°	4812
70°	3140
75°	2352
80°	2062
85°	2465



TEST NUMBER: P366014

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.8	6.4
10°-20°	192.8	18.0
20°-30°	260.3	24.3
30°-40°	246.3	23.0
40°-50°	172.6	16.1
50°-60°	86.9	8.1
60°-70°	30.7	2.9
70°-80°	9.6	0.9
80°-90°	3.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	521.9	48.7
0°-40°	768.2	71.7
0°-60°	1027.7	96.0
0°-90°	1071.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1071.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	725	
5°	723	69
15°	689	193
25°	570	260
35°	396	246
45°	223	173
55°	95	87
65°	28	31
75°	8	10
85°	3	3
90°	0	



TEST NUMBER: P366014

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	725.2
2.5°	723.2
5°	722.7
7.5°	721.2
10°	714.7
12.5°	704.2
15°	688.7
17.5°	667.3
20°	637.4
22.5°	605.5
25°	569.5
27.5°	530.6
30°	485.8
32.5°	441.4
35°	395.5
37.5°	350.1
40°	305.2
42.5°	263.8
45°	222.9
47.5°	185.5
50°	150.6
52.5°	120.7
55°	94.8
57.5°	72.8
60°	54.9
62.5°	40.4
65°	28.4
67.5°	20.9
70°	15.0
72.5°	11.5
75°	8.5
77.5°	6.5
80°	5.0
82.5°	4.0
85°	3.0
87.5°	1.5
90°	0.0

(END OF REPORT)