

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366022

Luminaire Tested: **FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366022
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-11)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH
Description: VANDAL RESISTANT OPEN, WARM HAZE REFLECTOR, 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1426.0 lumens
Efficiency: N/A
Efficacy: 100.4 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.84
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366022

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH

Luminous Intensity Polar Plot

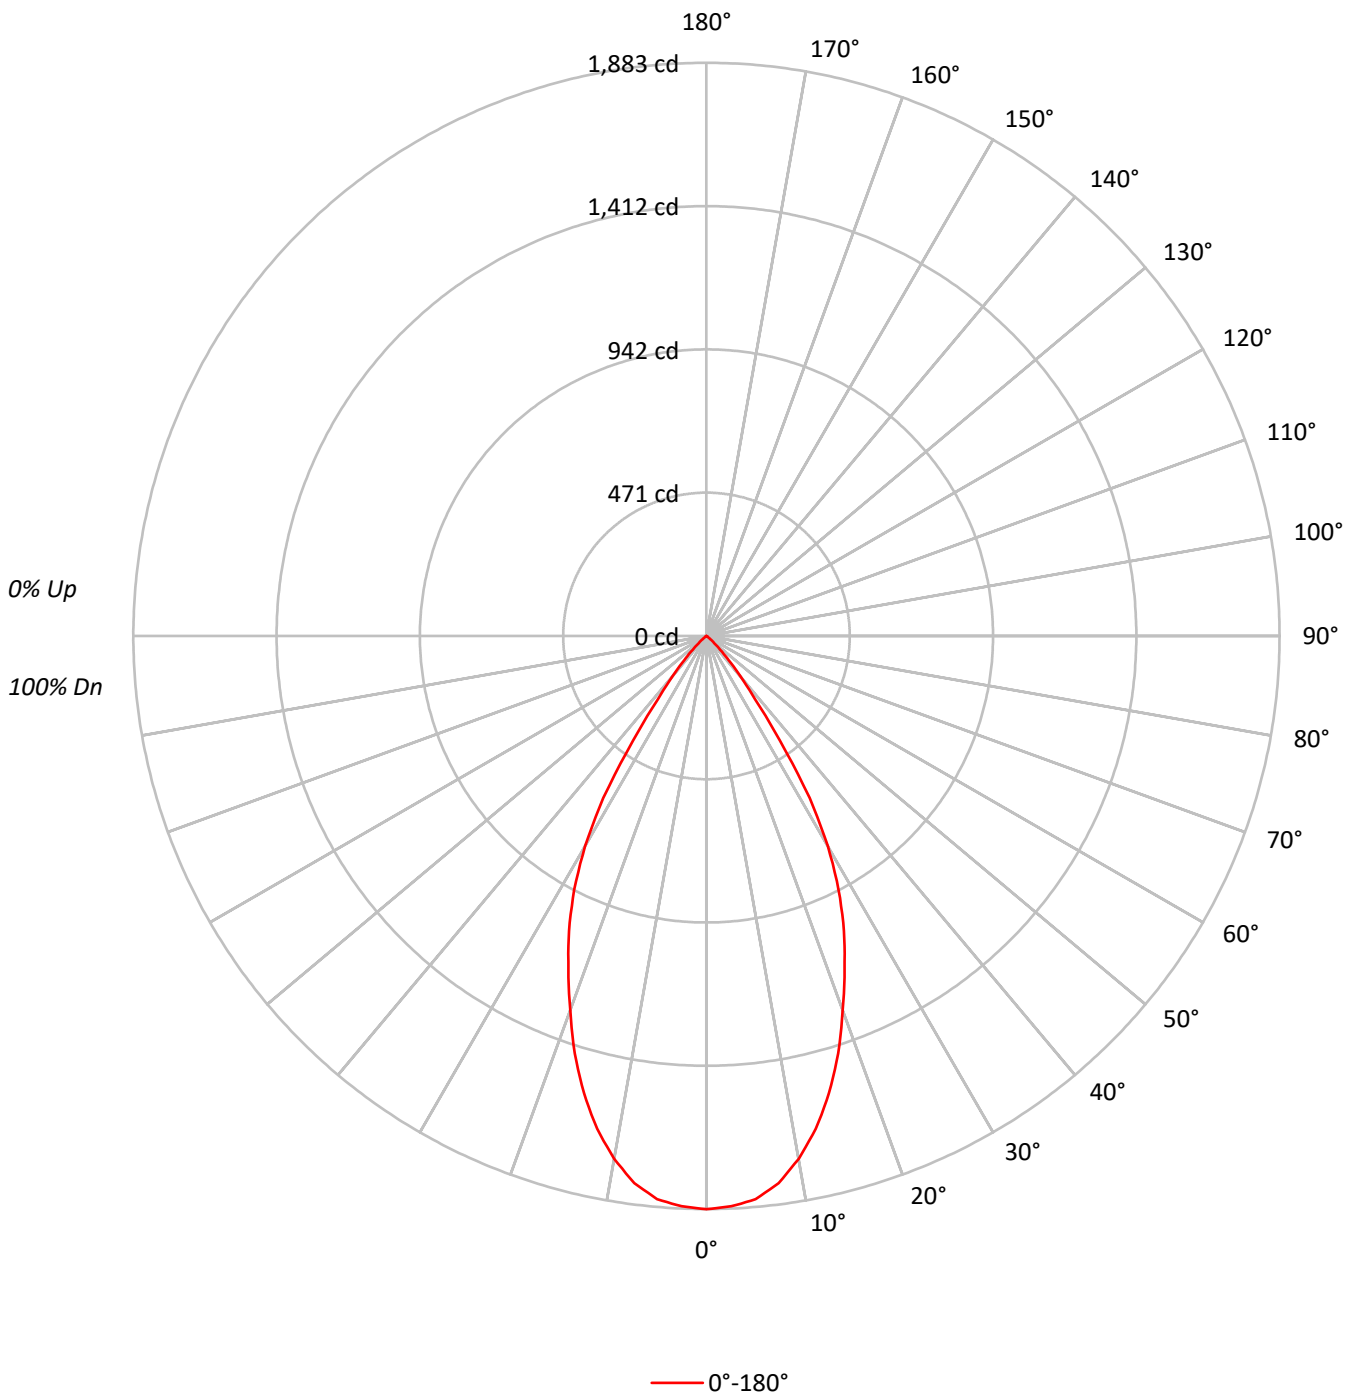



TEST NUMBER: P366022

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	82
4	98	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	72
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64
8	81	72	66	63	80	72	66	62	71	66	62	70	65	62	69	65	62	60
9	78	68	63	59	77	68	62	59	67	62	59	66	62	58	65	61	58	57
10	74	65	59	56	73	64	59	56	64	59	55	63	58	55	62	58	55	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	51443
5°	50929
10°	48378
15°	43979
20°	38047
25°	32222
30°	25148
35°	14002
40°	6133
45°	2465
50°	680
55°	119
60°	82
65°	65
70°	40
75°	53
80°	0
85°	0



TEST NUMBER: P366022

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	173.6	12.2
10°-20°	431.5	30.3
20°-30°	484.7	34.0
30°-40°	274.3	19.2
40°-50°	56.5	4.0
50°-60°	4.1	0.3
60°-70°	0.9	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1089.9	76.4
0°-40°	1364.2	95.7
0°-60°	1424.8	99.9
0°-90°	1426.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1426.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1883	
5°	1857	174
15°	1555	432
25°	1069	485
35°	420	274
45°	64	57
55°	2	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P366022

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1883.3
2.5°	1875.4
5°	1857.4
7.5°	1813.0
10°	1744.2
12.5°	1658.5
15°	1555.2
17.5°	1438.1
20°	1308.9
22.5°	1185.3
25°	1069.1
27.5°	940.4
30°	797.3
32.5°	630.8
35°	419.9
37.5°	263.3
40°	172.0
42.5°	108.7
45°	63.8
47.5°	33.9
50°	16.0
52.5°	5.5
55°	2.5
57.5°	2.0
60°	1.5
62.5°	1.0
65°	1.0
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)