

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365303

Luminaire Tested: **FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BL84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365303
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-36)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BL84
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.125", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1160.0 lumens
Efficiency: N/A
Efficacy: 81.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365303

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BL84

Luminous Intensity Polar Plot

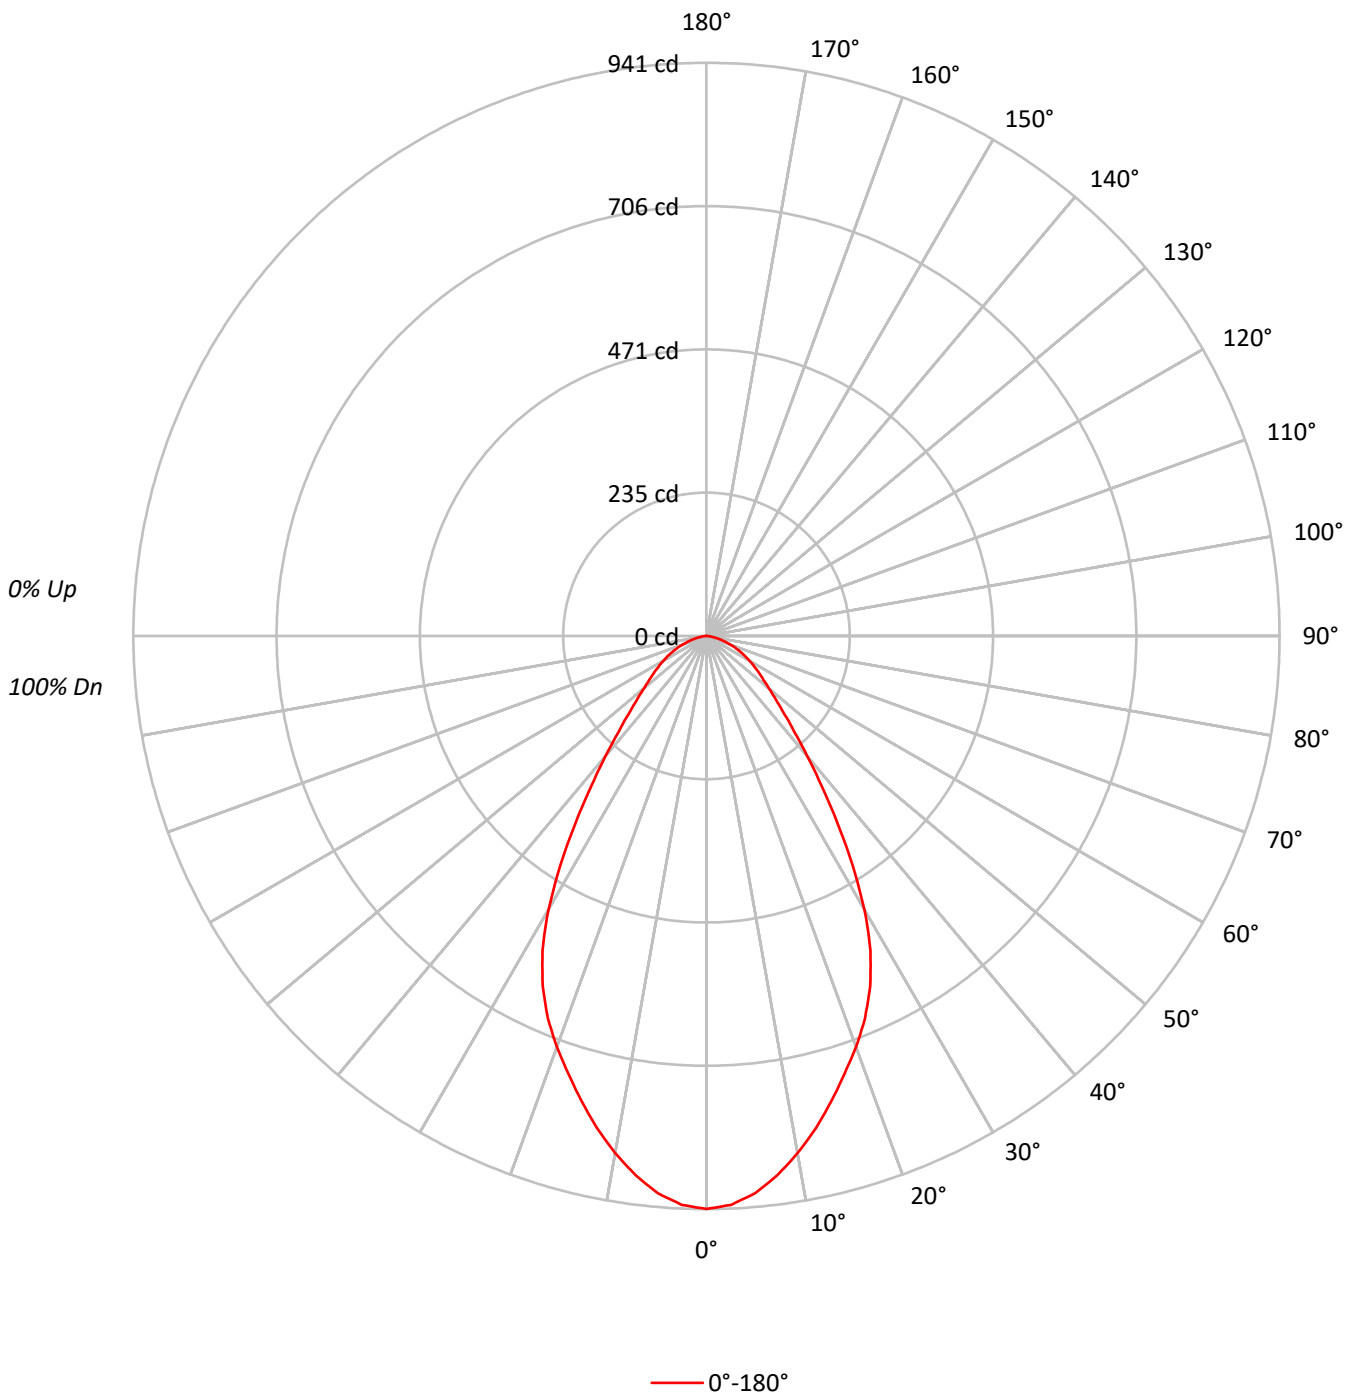



TEST NUMBER: P365303

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	77	74	72
4	91	82	75	70	89	80	74	69	78	73	68	76	71	67	74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62	70	65	61	69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56	65	60	56	64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52	61	55	51	60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47	57	51	47	56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	25698
5°	25177
10°	23915
15°	22374
20°	20874
25°	19153
30°	16354
35°	12468
40°	9182
45°	6969
50°	5673
55°	4991
60°	4458
65°	3943
70°	3338
75°	2607
80°	1746
85°	784



TEST NUMBER: P365303

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.8	7.4
10°-20°	222.0	19.1
20°-30°	288.6	24.9
30°-40°	235.1	20.3
40°-50°	142.7	12.3
50°-60°	94.4	8.1
60°-70°	60.6	5.2
70°-80°	26.7	2.3
80°-90°	4.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	596.4	51.4
0°-40°	831.5	71.7
0°-60°	1068.7	92.1
0°-90°	1160.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1160.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	941	
5°	918	86
15°	791	222
25°	636	289
35°	374	235
45°	180	143
55°	105	94
65°	61	61
75°	25	27
85°	2	4
90°	0	



TEST NUMBER: P365303

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BL84

CANDELA DISTRIBUTION (FULL):

0°	
0°	940.8
2.5°	934.8
5°	918.2
7.5°	893.0
10°	862.2
12.5°	828.0
15°	791.2
17.5°	753.4
20°	718.1
22.5°	679.8
25°	635.5
27.5°	583.1
30°	518.5
32.5°	446.0
35°	373.9
37.5°	309.9
40°	257.5
42.5°	213.7
45°	180.4
47.5°	154.2
50°	133.5
52.5°	117.9
55°	104.8
57.5°	92.7
60°	81.6
62.5°	71.1
65°	61.0
67.5°	51.4
70°	41.8
72.5°	32.8
75°	24.7
77.5°	17.6
80°	11.1
82.5°	6.0
85°	2.5
87.5°	0.5
90°	0.0

(END OF REPORT)