

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365310

Luminaire Tested: **FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BTR80**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365310
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-14)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BTR80
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM ACRYLIC, PATTERN 12 0.125", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 873.9 lumens
Efficiency: N/A
Efficacy: 61.5 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.95
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365310

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BTR80

Luminous Intensity Polar Plot

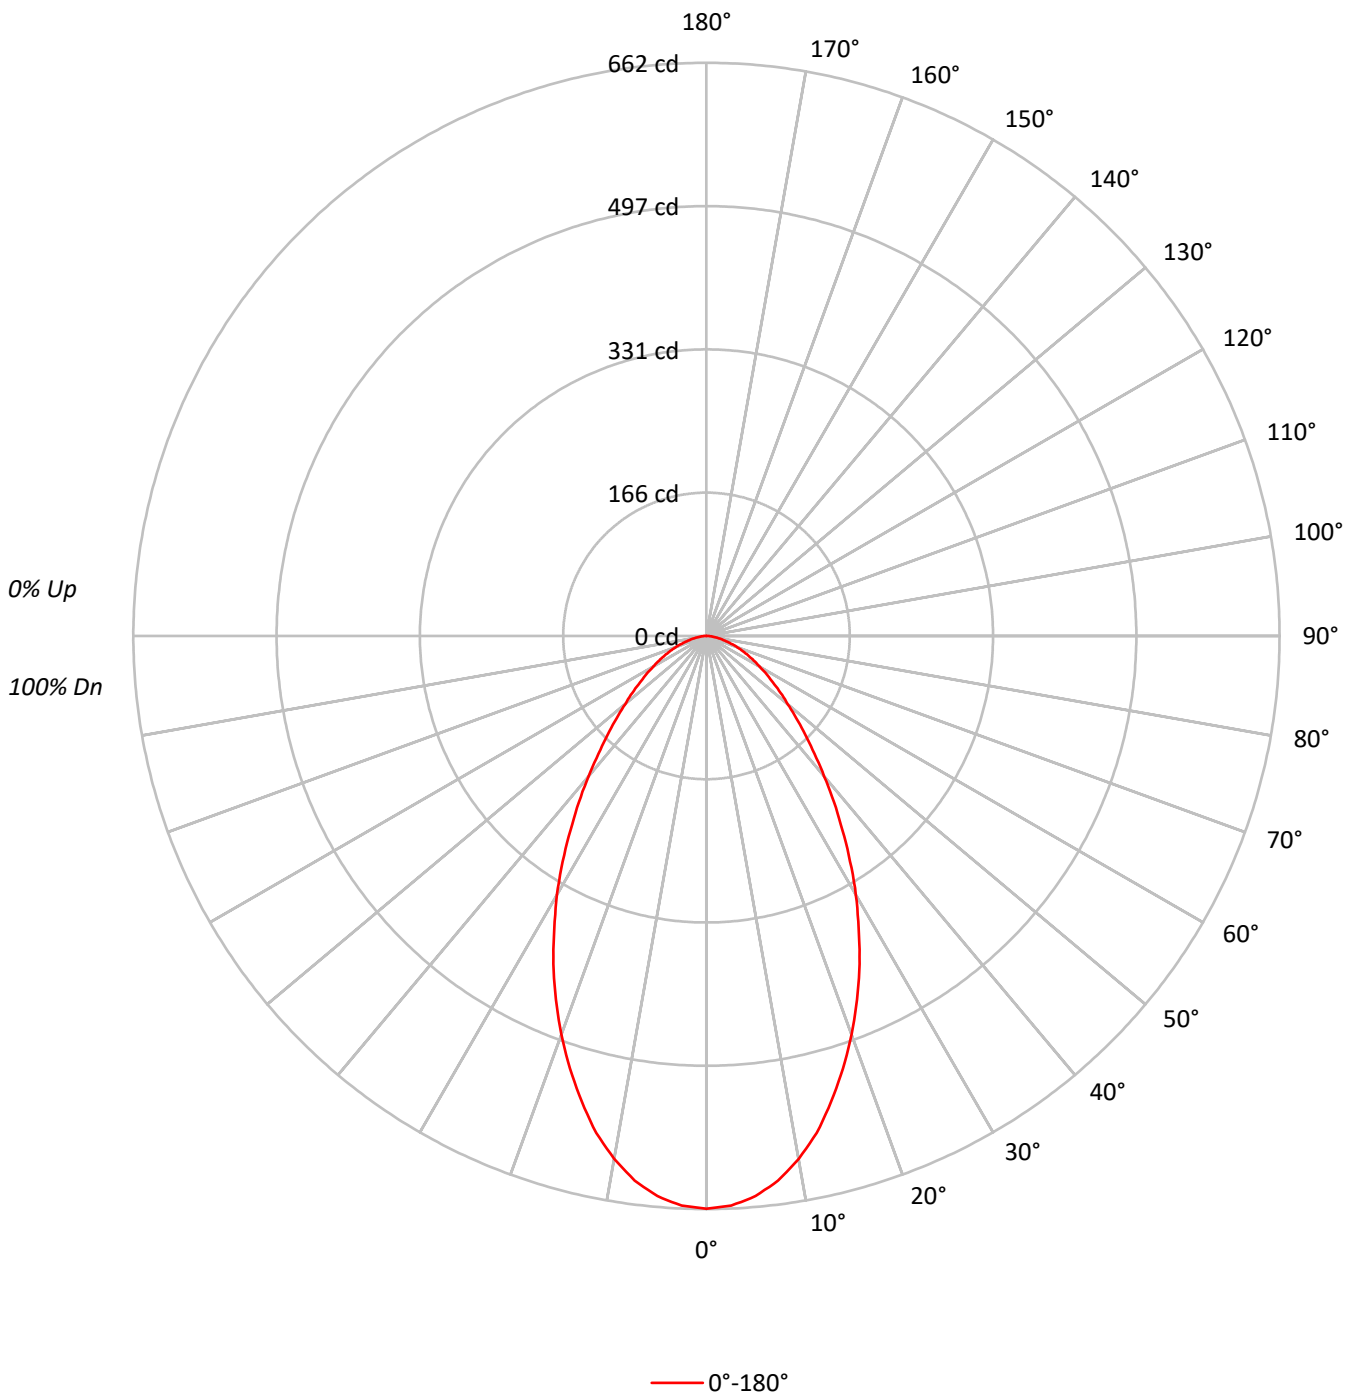



TEST NUMBER: P365310

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BTR80

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	104	101	109	105	102	100	101	99	96		97	95	93		94	92	91	89
2	103	97	91	87	101	95	90	86	92	88	84		89	85	82		86	83	80	78
3	96	88	81	76	94	86	80	75	83	78	74		81	76	73		78	75	72	70
4	90	80	73	67	88	79	72	67	76	70	66		74	69	65		72	68	64	62
5	84	73	66	60	82	72	65	60	70	64	59		68	63	59		66	62	58	56
6	78	67	60	54	77	66	59	54	65	58	54		63	57	53		62	57	53	51
7	74	62	55	49	72	61	54	49	60	53	49		59	53	49		57	52	48	47
8	69	58	50	45	68	57	50	45	56	49	45		55	49	45		53	48	44	43
9	65	54	46	42	64	53	46	42	52	46	41		51	45	41		50	45	41	39
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	47372
5°	46683
10°	44584
15°	41274
20°	37321
25°	33039
30°	28541
35°	23915
40°	19778
45°	16323
50°	13634
55°	11697
60°	10167
65°	8963
70°	7809
75°	6557
80°	5402
85°	4108



TEST NUMBER: P365310

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BTR80

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.8	7.0
10°-20°	155.5	17.8
20°-30°	191.3	21.9
30°-40°	171.6	19.6
40°-50°	125.5	14.4
50°-60°	84.9	9.7
60°-70°	52.7	6.0
70°-80°	25.5	2.9
80°-90°	6.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	407.7	46.7
0°-40°	579.3	66.3
0°-60°	789.7	90.4
0°-90°	873.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	873.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	662	
5°	650	61
15°	557	156
25°	418	191
35°	274	172
45°	161	126
55°	94	85
65°	53	53
75°	24	25
85°	5	6
90°	0	



TEST NUMBER: P365310

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-MW-BTR80

CANDELA DISTRIBUTION (FULL):

	0°
0°	661.6
2.5°	658.6
5°	649.5
7.5°	634.4
10°	613.2
12.5°	588.0
15°	556.8
17.5°	524.1
20°	489.8
22.5°	454.5
25°	418.2
27.5°	380.4
30°	345.2
32.5°	308.9
35°	273.6
37.5°	241.9
40°	211.6
42.5°	184.4
45°	161.2
47.5°	140.6
50°	122.4
52.5°	107.8
55°	93.7
57.5°	82.1
60°	71.0
62.5°	61.5
65°	52.9
67.5°	44.8
70°	37.3
72.5°	30.2
75°	23.7
77.5°	17.6
80°	13.1
82.5°	8.6
85°	5.0
87.5°	2.0
90°	0.0

(END OF REPORT)