

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366026

Luminaire Tested: **FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BL87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366026
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BL87
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.375", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1247.0 lumens
Efficiency: N/A
Efficacy: 87.8 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366026

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BL87

Luminous Intensity Polar Plot

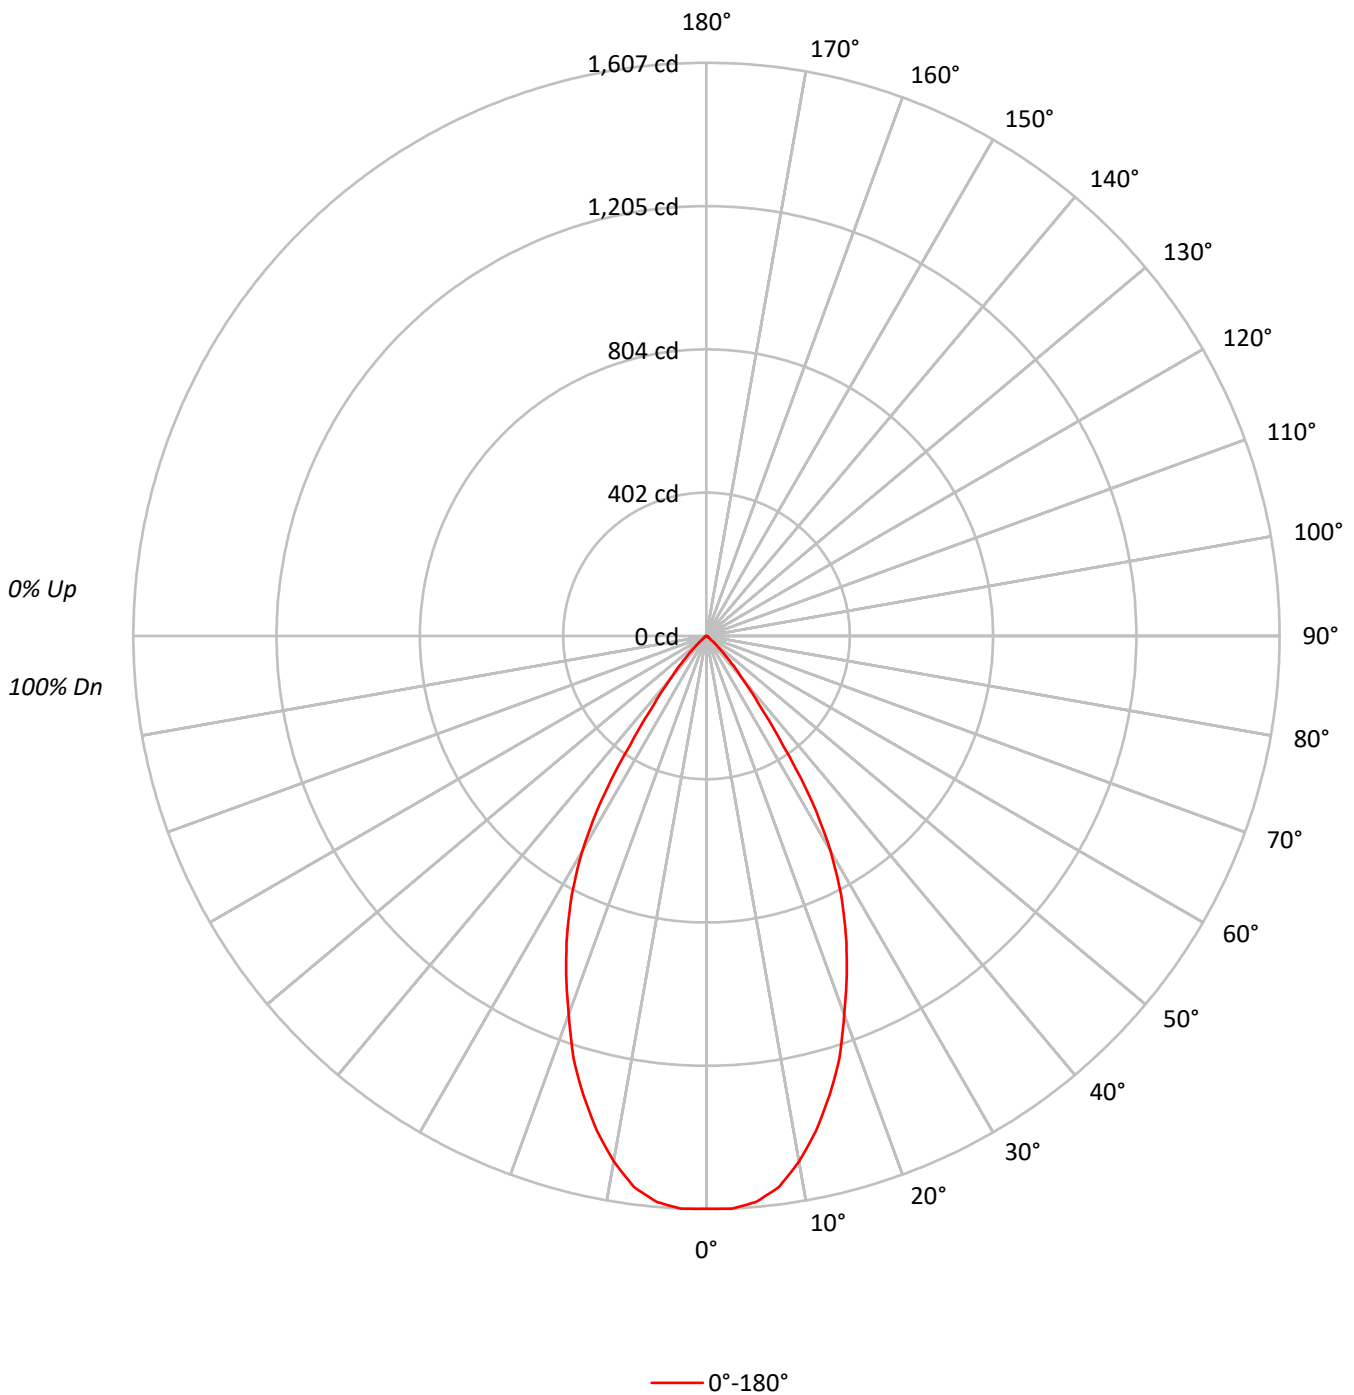



TEST NUMBER: P366026

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BL87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		75	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	43868
5°	43685
10°	41497
15°	37693
20°	32801
25°	27888
30°	21937
35°	12515
40°	5630
45°	2372
50°	748
55°	229
60°	158
65°	123
70°	112
75°	148
80°	79
85°	157



TEST NUMBER: P366026

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BL87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.0	11.9
10°-20°	370.8	29.7
20°-30°	420.2	33.7
30°-40°	243.6	19.5
40°-50°	54.0	4.3
50°-60°	5.9	0.5
60°-70°	1.9	0.2
70°-80°	1.3	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	940.0	75.4
0°-40°	1183.5	94.9
0°-60°	1243.5	99.7
0°-90°	1247.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1247.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1606	
5°	1593	149
15°	1333	371
25°	925	420
35°	375	244
45°	61	54
55°	5	6
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P366026

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BL87

CANDELA DISTRIBUTION (FULL):

0°	
0°	1606.0
2.5°	1607.4
5°	1593.2
7.5°	1558.4
10°	1496.1
12.5°	1420.5
15°	1332.9
17.5°	1240.7
20°	1128.4
22.5°	1027.1
25°	925.3
27.5°	816.8
30°	695.5
32.5°	552.3
35°	375.3
37.5°	241.2
40°	157.9
42.5°	103.2
45°	61.4
47.5°	34.3
50°	17.6
52.5°	8.1
55°	4.8
57.5°	3.8
60°	2.9
62.5°	2.4
65°	1.9
67.5°	1.4
70°	1.4
72.5°	1.4
75°	1.4
77.5°	1.0
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)