

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366036

Luminaire Tested: **FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BTR87**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366036  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BTR87  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 1500LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1099.0 lumens  
Efficiency: N/A  
Efficacy: 77.4 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366036

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BTR87

### Luminous Intensity Polar Plot

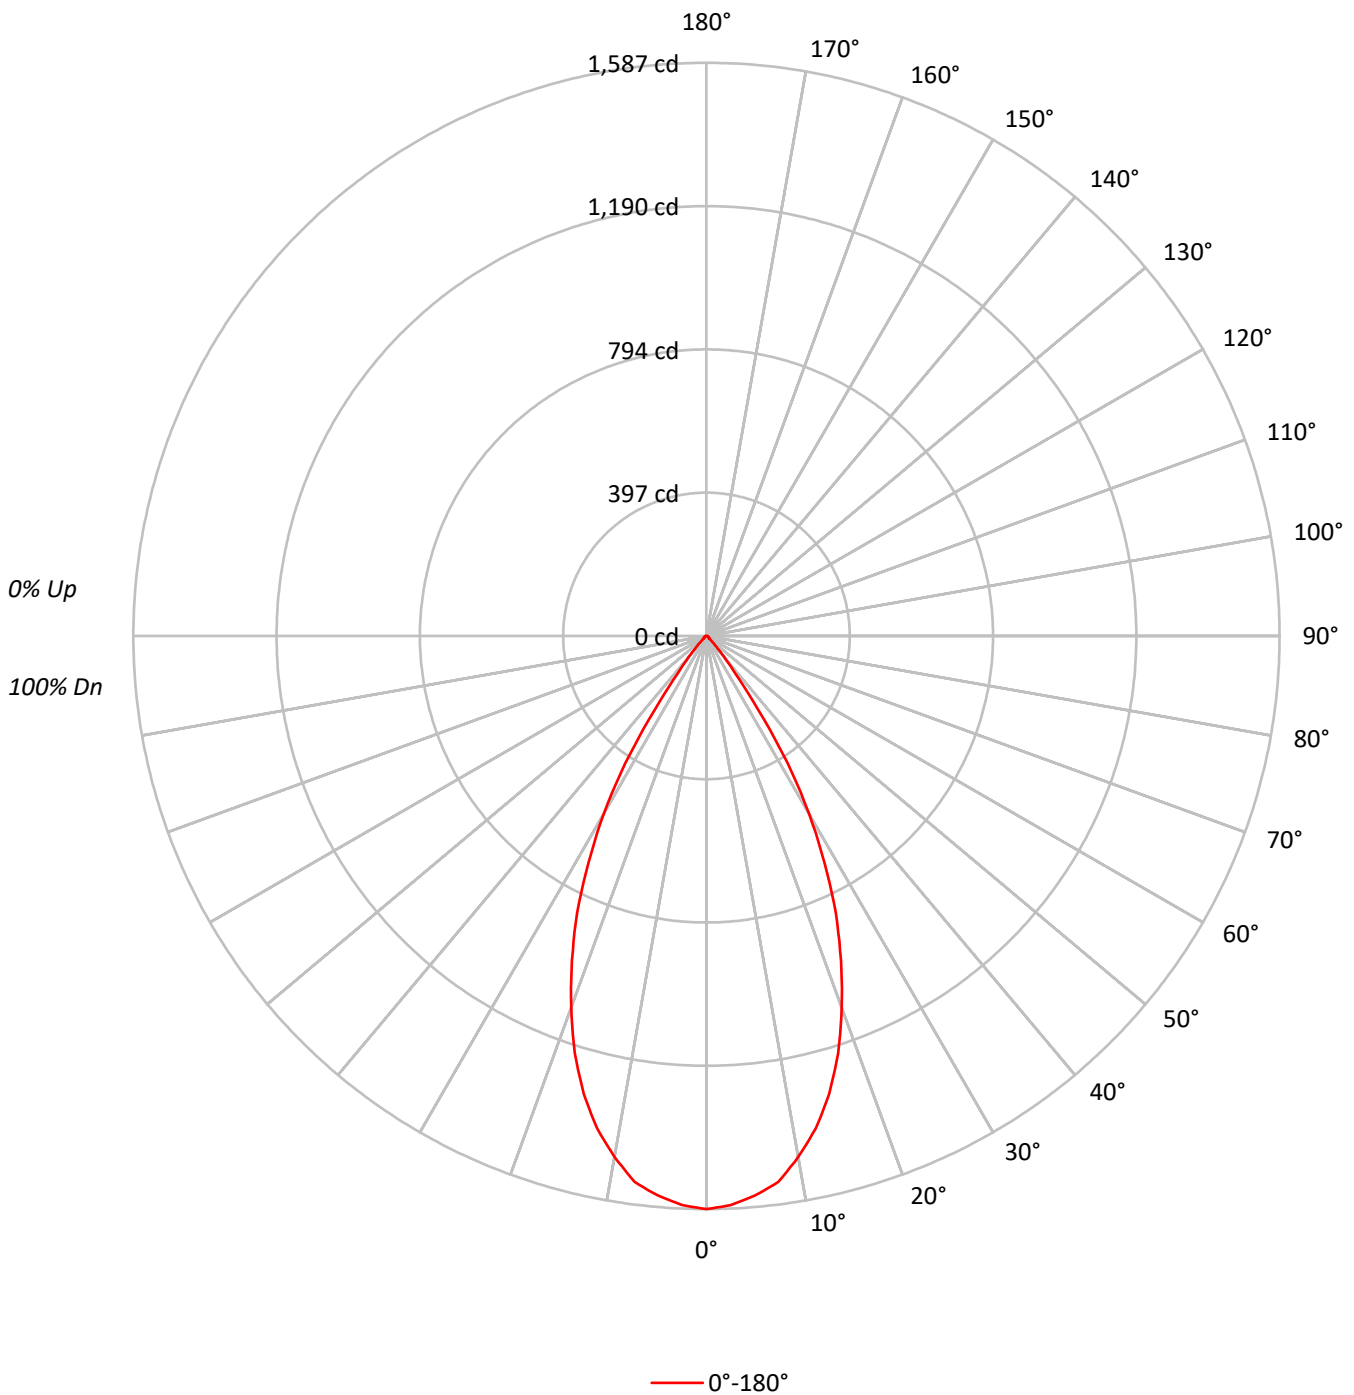



TEST NUMBER: P366036

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BTR87

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	113625
5°	111752
10°	106486
15°	97300
20°	83443
25°	66956
30°	46945
35°	21686
40°	6963
45°	2248
50°	1047
55°	924
60°	917
65°	830
70°	816
75°	968
80°	1237
85°	2054



TEST NUMBER: P366036

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BTR87

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	145.8	13.3
10°-20°	363.2	33.1
20°-30°	381.5	34.7
30°-40°	169.3	15.4
40°-50°	21.9	2.0
50°-60°	6.8	0.6
60°-70°	4.8	0.4
70°-80°	3.6	0.3
80°-90°	2.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	890.5	81.0
0°-40°	1059.8	96.4
0°-60°	1088.5	99.0
0°-90°	1099.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1099.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1587	
5°	1555	146
15°	1313	363
25°	848	381
35°	248	169
45°	22	22
55°	7	7
65°	5	5
75°	4	4
85°	2	2
90°	0	



TEST NUMBER: P366036

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8040-F6LBXVM1-WMH-BTR87

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1586.9
2.5°	1577.0
5°	1554.8
7.5°	1524.7
10°	1464.6
12.5°	1397.0
15°	1312.6
17.5°	1211.5
20°	1095.1
22.5°	972.8
25°	847.5
27.5°	706.9
30°	567.8
32.5°	417.3
35°	248.1
37.5°	132.2
40°	74.5
42.5°	40.9
45°	22.2
47.5°	11.3
50°	9.4
52.5°	8.4
55°	7.4
57.5°	6.9
60°	6.4
62.5°	5.4
65°	4.9
67.5°	3.9
70°	3.9
72.5°	3.5
75°	3.5
77.5°	3.0
80°	3.0
82.5°	2.5
85°	2.5
87.5°	1.5
90°	0.0

(END OF REPORT)