

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364616

Luminaire Tested: **FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364616
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR 0.125", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1224.0 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364616

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR89BV

Luminous Intensity Polar Plot

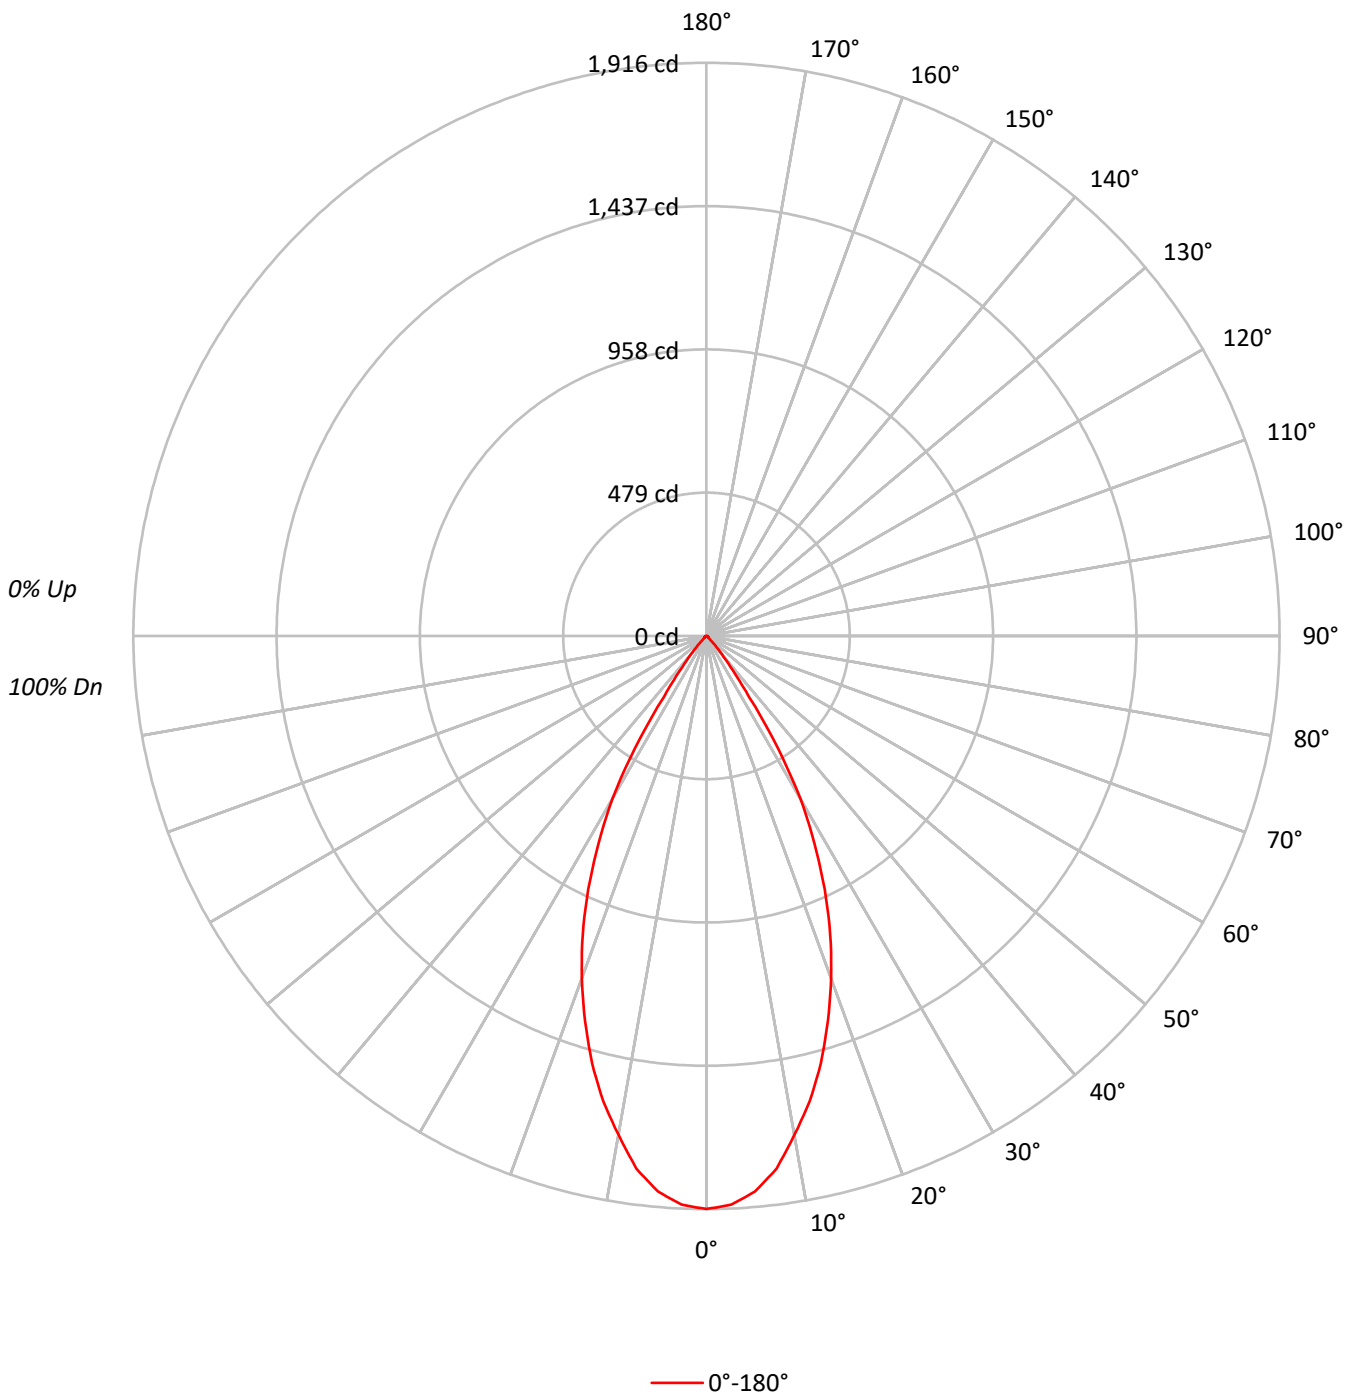



TEST NUMBER: P364616

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	79
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	137153
5°	133961
10°	123128
15°	109583
20°	92816
25°	73805
30°	51889
35°	21660
40°	7478
45°	1934
50°	980
55°	899
60°	888
65°	881
70°	858
75°	1134
80°	1278
85°	2136



TEST NUMBER: P364616

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.5	14.1
10°-20°	409.5	33.5
20°-30°	422.5	34.5
30°-40°	179.7	14.7
40°-50°	21.6	1.8
50°-60°	6.5	0.5
60°-70°	5.1	0.4
70°-80°	4.1	0.3
80°-90°	2.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1004.6	82.1
0°-40°	1184.3	96.8
0°-60°	1212.4	99.1
0°-90°	1224.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1224.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1916	
5°	1864	173
15°	1478	409
25°	934	423
35°	248	180
45°	19	22
55°	7	7
65°	5	5
75°	4	4
85°	3	2
90°	0	



TEST NUMBER: P364616

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	1915.5
2.5°	1903.1
5°	1863.8
7.5°	1795.7
10°	1693.5
12.5°	1592.9
15°	1478.3
17.5°	1349.2
20°	1218.1
22.5°	1081.4
25°	934.2
27.5°	782.5
30°	627.6
32.5°	444.9
35°	247.8
37.5°	142.5
40°	80.0
42.5°	41.3
45°	19.1
47.5°	10.3
50°	8.8
52.5°	7.7
55°	7.2
57.5°	6.7
60°	6.2
62.5°	5.7
65°	5.2
67.5°	4.6
70°	4.1
72.5°	4.1
75°	4.1
77.5°	3.6
80°	3.1
82.5°	3.1
85°	2.6
87.5°	1.5
90°	0.0

(END OF REPORT)