

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365329

Luminaire Tested: **FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR81**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365329
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-19)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR81
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 812.0 lumens
Efficiency: N/A
Efficacy: 57.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.19
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365329

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR81

Luminous Intensity Polar Plot

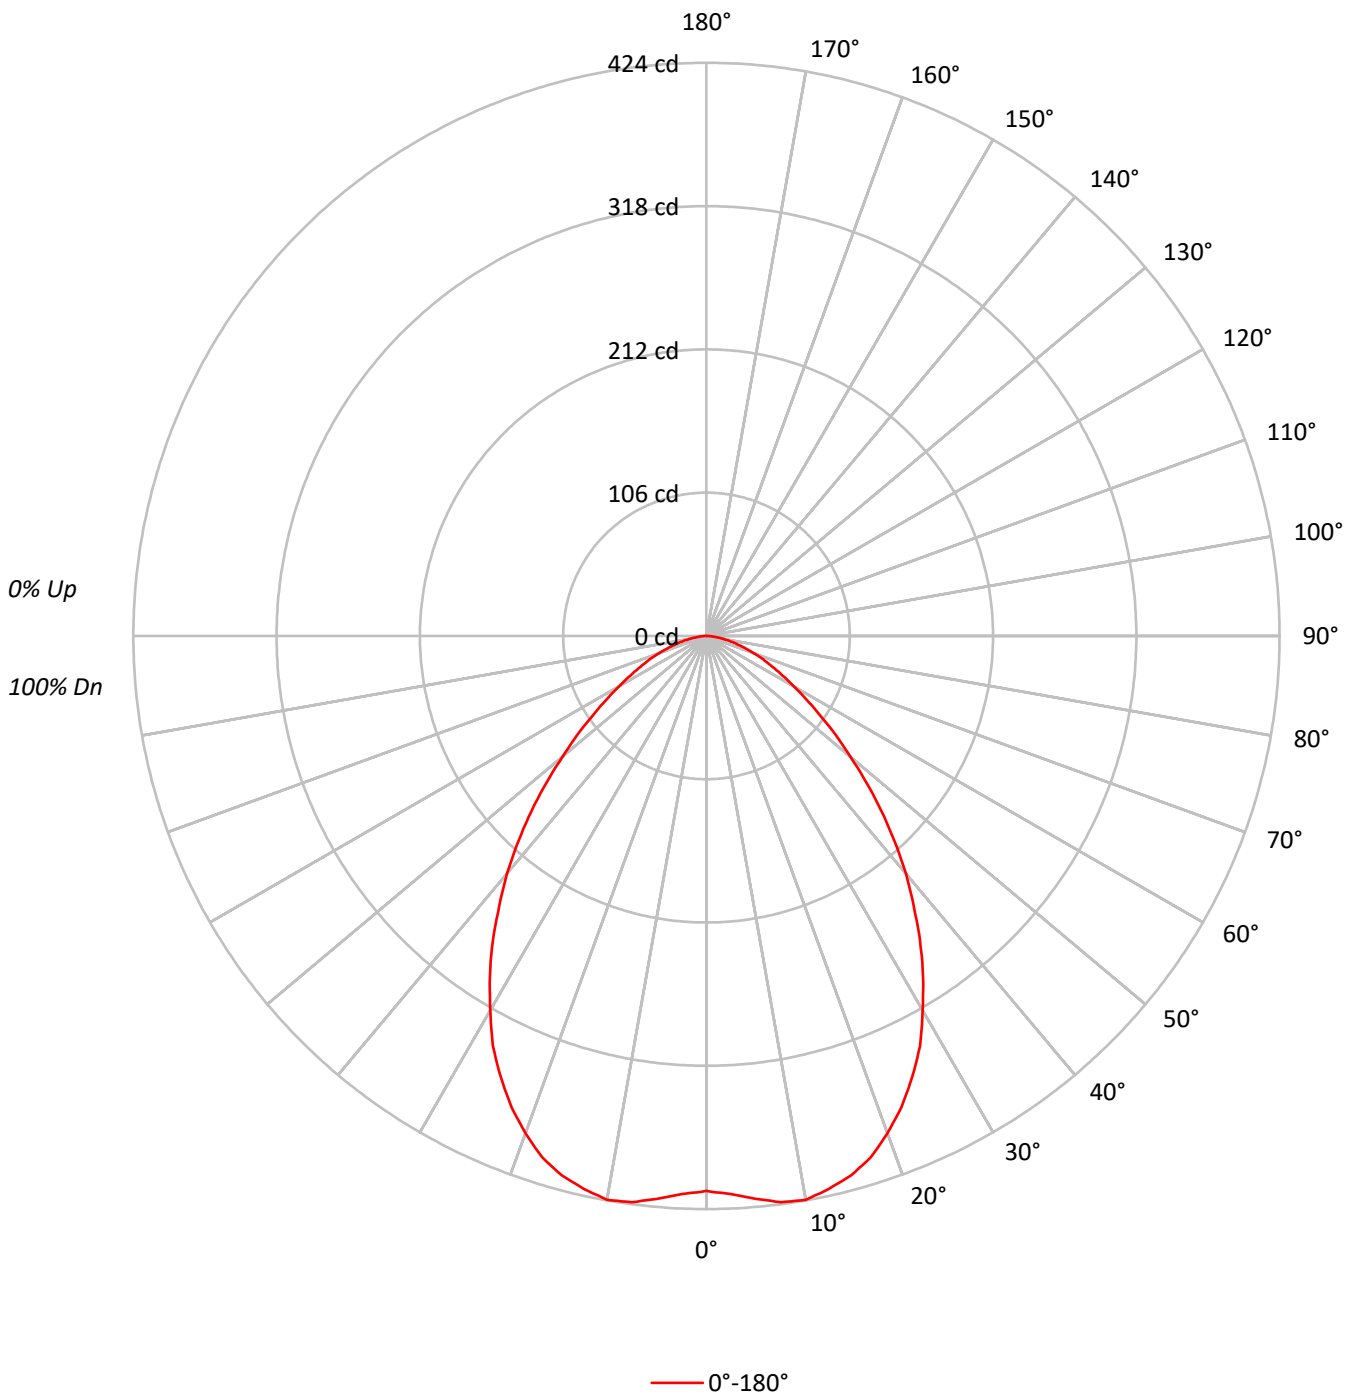



TEST NUMBER: P365329

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR81

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	105	101	99	101	98	96		97	95	93		93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82		87	84	80		84	81	79	77
3	95	86	79	73	93	84	78	73	81	76	71		79	74	70		76	72	69	67
4	88	77	70	64	86	76	69	64	74	68	63		72	66	62		70	65	61	59
5	82	70	62	57	80	69	62	56	67	61	56		65	60	55		64	59	55	53
6	76	64	56	51	74	63	56	50	62	55	50		60	54	49		58	53	49	47
7	71	59	51	45	69	58	51	45	57	50	45		55	49	45		54	49	44	43
8	66	54	46	41	65	54	46	41	52	46	41		51	45	41		50	45	40	39
9	62	50	43	38	61	50	42	37	48	42	37		47	41	37		46	41	37	35
10	59	47	39	34	58	46	39	34	45	39	34		44	38	34		43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	29400
5°	30037
10°	30791
15°	30630
20°	29831
25°	28449
30°	26441
35°	24081
40°	21461
45°	18541
50°	15461
55°	12820
60°	10712
65°	9098
70°	7767
75°	6418
80°	5113
85°	3779



TEST NUMBER: P365329

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR81

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.1	4.9
10°-20°	116.1	14.3
20°-30°	165.1	20.3
30°-40°	171.7	21.1
40°-50°	141.1	17.4
50°-60°	93.2	11.5
60°-70°	54.0	6.7
70°-80°	25.1	3.1
80°-90°	5.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	321.2	39.6
0°-40°	492.9	60.7
0°-60°	727.1	89.5
0°-90°	812.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	812.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	411	
5°	418	40
15°	413	116
25°	360	165
35°	276	172
45°	183	141
55°	103	93
65°	54	54
75°	23	25
85°	5	6
90°	0	



TEST NUMBER: P365329

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR81

CANDELA DISTRIBUTION (FULL):

0°	
0°	410.6
2.5°	413.2
5°	417.9
7.5°	422.5
10°	423.5
12.5°	418.9
15°	413.2
17.5°	404.4
20°	391.5
22.5°	377.1
25°	360.1
27.5°	342.0
30°	319.8
32.5°	298.2
35°	275.5
37.5°	251.7
40°	229.6
42.5°	205.8
45°	183.1
47.5°	160.4
50°	138.8
52.5°	120.7
55°	102.7
57.5°	87.7
60°	74.8
62.5°	63.5
65°	53.7
67.5°	45.4
70°	37.1
72.5°	29.9
75°	23.2
77.5°	17.5
80°	12.4
82.5°	8.3
85°	4.6
87.5°	2.1
90°	0.0

(END OF REPORT)