

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365332

Luminaire Tested: **FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR85**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365332
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-16)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR85
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.187", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 910.0 lumens
Efficiency: N/A
Efficacy: 64.1 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.84
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365332

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR85

Luminous Intensity Polar Plot

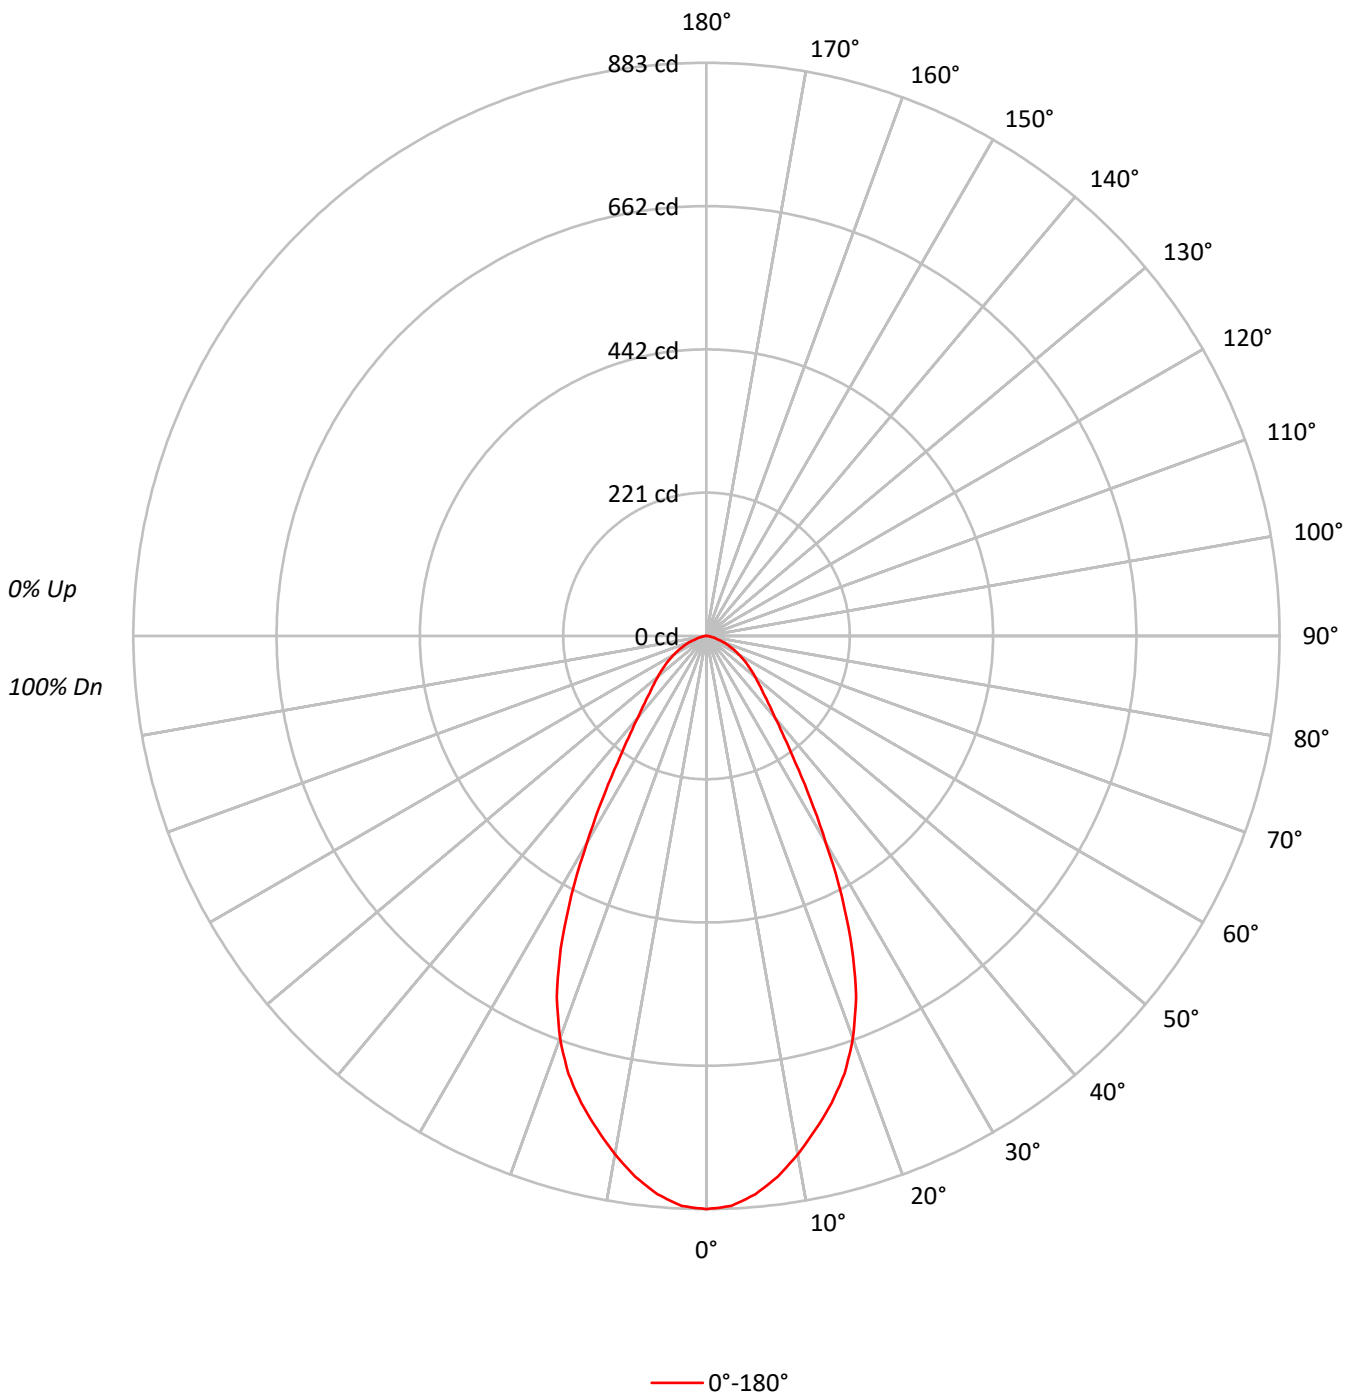



TEST NUMBER: P365332

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	86	83	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	93	84	77	72	91	82	76	72	80	75	71		78	73	70		76	72	69	67
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71	67	63	62
6	82	72	65	60	80	71	64	60	69	63	59		68	63	59		66	62	58	57
7	78	67	60	55	76	66	60	55	65	59	55		64	58	54		62	58	54	52
8	73	63	56	51	72	62	55	51	61	55	51		60	54	51		59	54	50	49
9	70	59	52	48	68	58	52	48	57	51	47		56	51	47		55	51	47	45
10	66	55	49	45	65	55	49	44	54	48	44		53	48	44		52	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	63232
5°	62064
10°	58958
15°	55218
20°	50267
25°	41935
30°	30409
35°	20917
40°	15376
45°	12485
50°	10861
55°	9600
60°	8349
65°	7082
70°	5715
75°	4150
80°	2763
85°	2958



TEST NUMBER: P365332

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.7	8.9
10°-20°	208.0	22.9
20°-30°	238.7	26.2
30°-40°	154.5	17.0
40°-50°	97.1	10.7
50°-60°	69.1	7.6
60°-70°	41.6	4.6
70°-80°	16.6	1.8
80°-90°	3.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	527.5	58.0
0°-40°	682.0	74.9
0°-60°	848.2	93.2
0°-90°	910.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	910.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	883	
5°	864	81
15°	745	208
25°	531	239
35°	239	154
45°	123	97
55°	77	69
65°	42	42
75°	15	17
85°	4	4
90°	0	



TEST NUMBER: P365332

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR85

CANDELA DISTRIBUTION (FULL):

	0°
0°	883.1
2.5°	879.0
5°	863.5
7.5°	840.3
10°	810.9
12.5°	778.4
15°	744.9
17.5°	707.2
20°	659.7
22.5°	602.5
25°	530.8
27.5°	450.8
30°	367.8
32.5°	297.6
35°	239.3
37.5°	196.5
40°	164.5
42.5°	141.3
45°	123.3
47.5°	109.4
50°	97.5
52.5°	87.2
55°	76.9
57.5°	67.6
60°	58.3
62.5°	50.0
65°	41.8
67.5°	34.0
70°	27.3
72.5°	20.6
75°	15.0
77.5°	10.3
80°	6.7
82.5°	4.1
85°	3.6
87.5°	2.1
90°	0.0

(END OF REPORT)