

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365334

Luminaire Tested: **FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365334
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR87
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 898.0 lumens
Efficiency: N/A
Efficacy: 63.2 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.84
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365334

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR87

Luminous Intensity Polar Plot

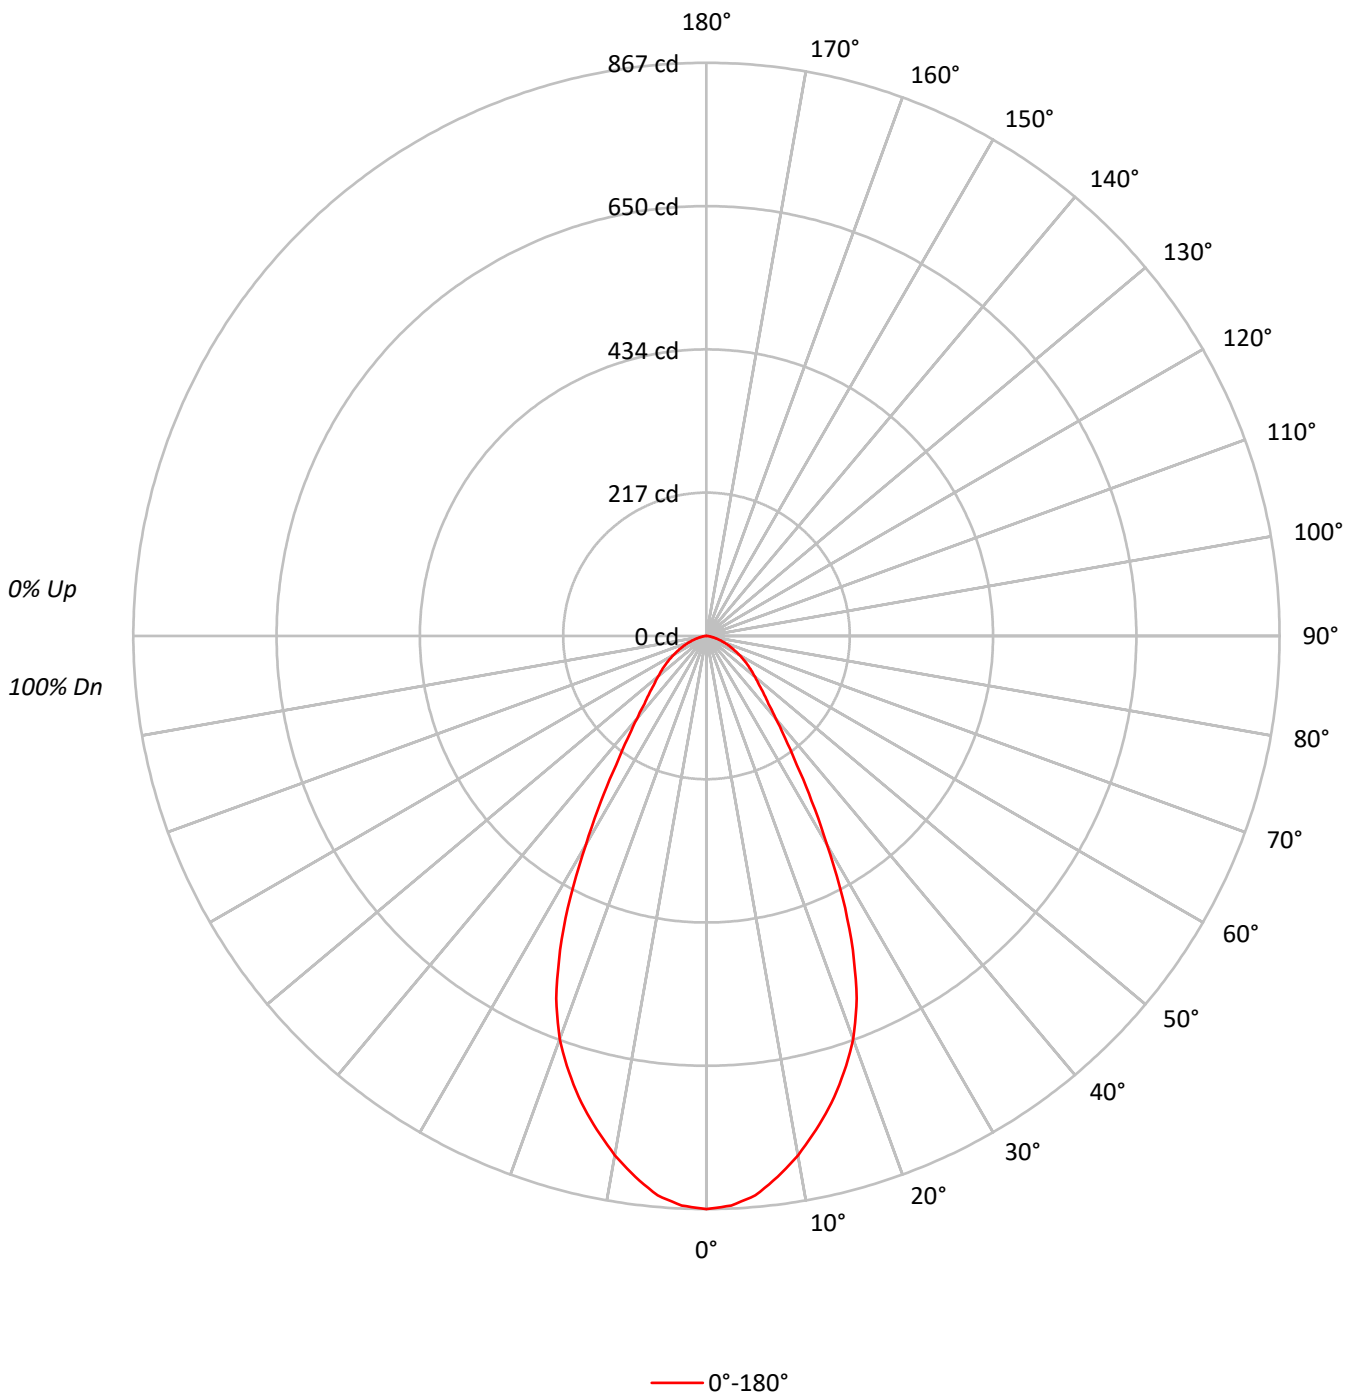



TEST NUMBER: P365334

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98		99	97	95		95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	86	83	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	92	84	77	72	91	82	76	71	80	75	71		78	73	70		76	72	69	67
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71	67	63	61
6	82	72	65	60	80	71	64	60	69	63	59		68	63	59		66	62	58	57
7	77	67	60	55	76	66	60	55	65	59	55		63	58	54		62	58	54	52
8	73	62	56	51	72	62	55	51	61	55	51		60	54	50		59	54	50	49
9	69	59	52	48	68	58	52	47	57	51	47		56	51	47		55	50	47	45
10	66	55	49	44	65	55	49	44	54	48	44		53	48	44		52	47	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62079
5°	61051
10°	58005
15°	54202
20°	49460
25°	41406
30°	30145
35°	20856
40°	15254
45°	12283
50°	10638
55°	9412
60°	8206
65°	6997
70°	5736
75°	4288
80°	2969
85°	2547



TEST NUMBER: P365334

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.3	8.8
10°-20°	204.2	22.7
20°-30°	235.7	26.3
30°-40°	153.7	17.1
40°-50°	95.4	10.6
50°-60°	67.8	7.5
60°-70°	41.2	4.6
70°-80°	17.1	1.9
80°-90°	3.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	519.3	57.8
0°-40°	673.0	74.9
0°-60°	836.2	93.1
0°-90°	898.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	898.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	867	
5°	849	79
15°	731	204
25°	524	236
35°	239	154
45°	121	95
55°	75	68
65°	41	41
75°	16	17
85°	3	3
90°	0	



TEST NUMBER: P365334

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-MW-BTR87

CANDELA DISTRIBUTION (FULL):

	0°
0°	867.0
2.5°	862.4
5°	849.4
7.5°	825.2
10°	797.8
12.5°	765.3
15°	731.2
17.5°	691.9
20°	649.1
22.5°	593.8
25°	524.1
27.5°	446.2
30°	364.6
32.5°	296.4
35°	238.6
37.5°	195.7
40°	163.2
42.5°	138.9
45°	121.3
47.5°	106.9
50°	95.5
52.5°	85.2
55°	75.4
57.5°	66.6
60°	57.3
62.5°	49.1
65°	41.3
67.5°	34.1
70°	27.4
72.5°	21.2
75°	15.5
77.5°	10.8
80°	7.2
82.5°	4.6
85°	3.1
87.5°	1.5
90°	0.0

(END OF REPORT)