

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366046

Luminaire Tested: **FLD6BX15D010-FEU6B12-8050-F6LBXVM1-WMH-BL89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366046
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-45)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-WMH-BL89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS ACRYLIC, CLEAR 0.125", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1415.9 lumens
Efficiency: N/A
Efficacy: 99.7 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366046

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-WMH-BL89BV

Luminous Intensity Polar Plot

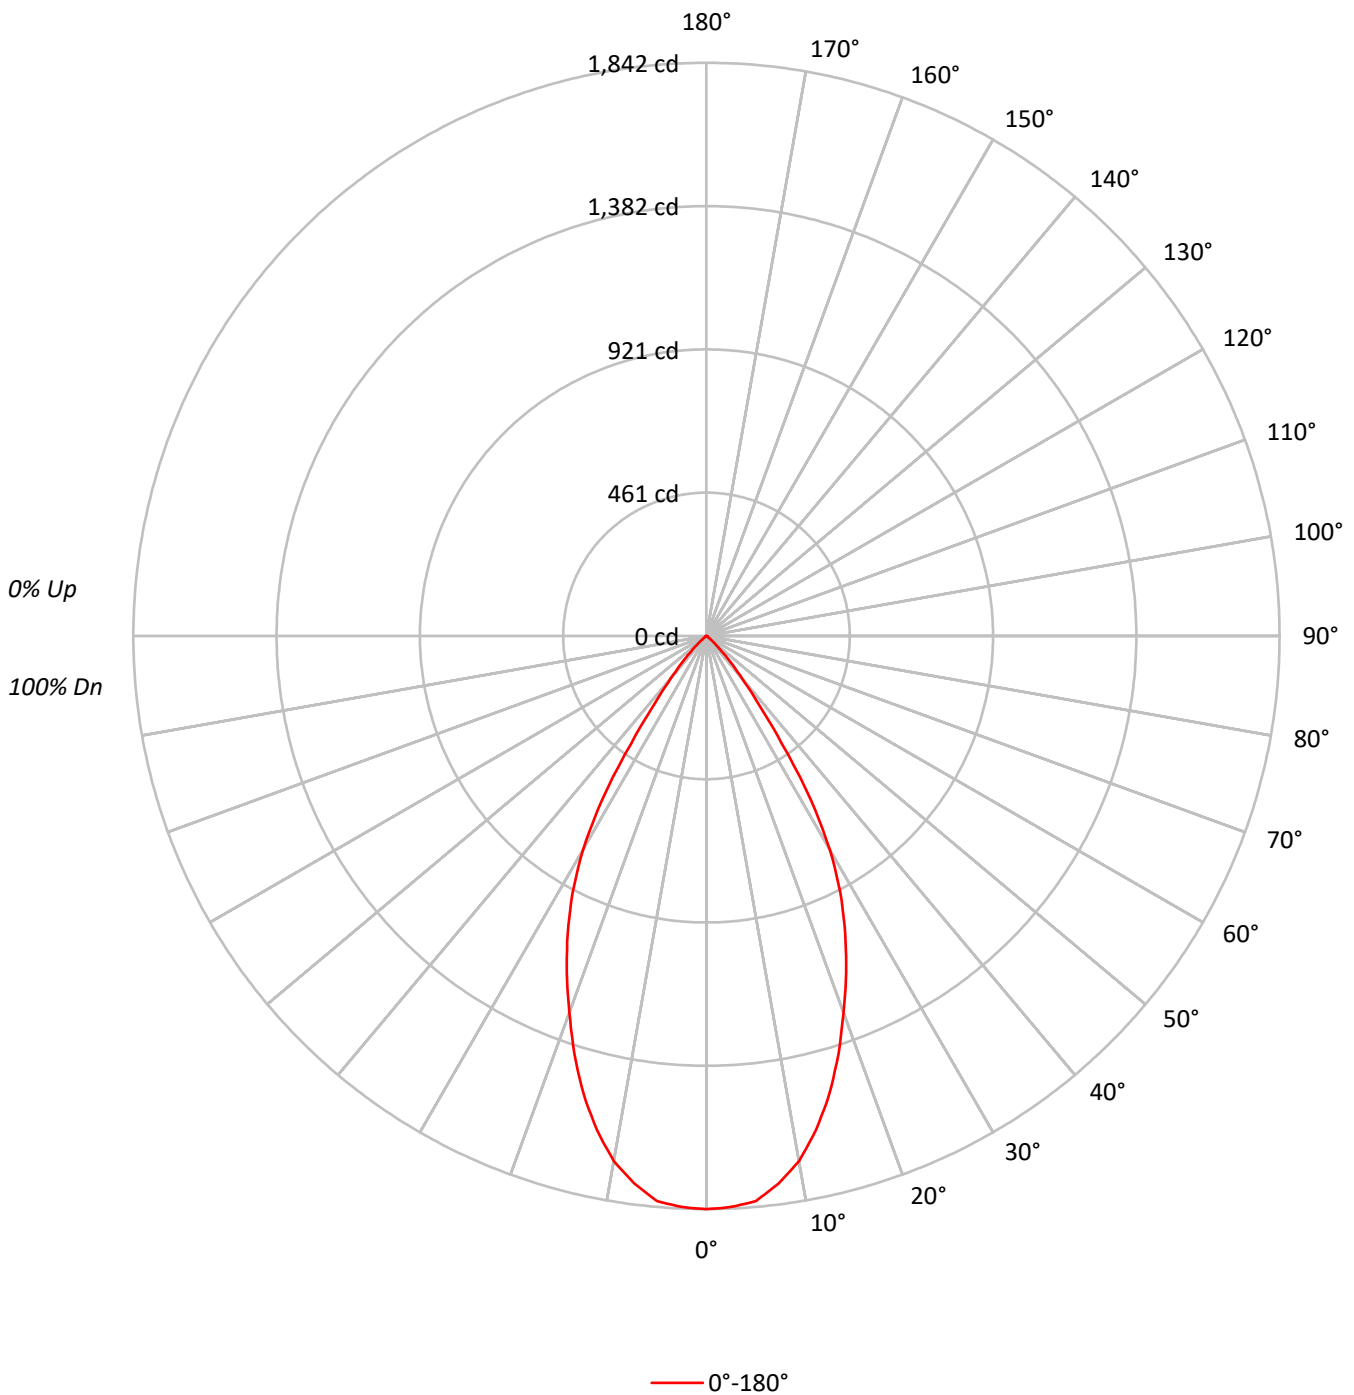



TEST NUMBER: P366046

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-WMH-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	99	96	99	96	93		96	94	91		93	91	90	88
3	103	97	92	89	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	97	90	85	81	88	84	80		86	82	79		84	81	78	77
5	94	86	80	76	92	85	79	76	83	78	75		81	77	74		80	76	74	72
6	89	81	75	71	88	80	74	71	78	74	70		77	73	70		76	72	69	68
7	85	76	70	66	84	75	70	66	74	69	66		73	69	65		72	68	65	64
8	81	72	66	62	80	71	66	62	70	65	62		69	65	62		68	64	61	60
9	77	68	62	59	76	68	62	58	67	62	58		66	61	58		65	61	58	57
10	74	65	59	55	73	64	59	55	63	58	55		63	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50320
5°	49989
10°	47530
15°	43131
20°	37417
25°	31806
30°	25031
35°	14102
40°	6333
45°	2635
50°	790
55°	219
60°	142
65°	97
70°	80
75°	106
80°	79
85°	0



TEST NUMBER: P366046

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-WMH-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	170.2	12.0
10°-20°	423.3	29.9
20°-30°	479.3	33.9
30°-40°	274.8	19.4
40°-50°	59.7	4.2
50°-60°	5.8	0.4
60°-70°	1.7	0.1
70°-80°	0.9	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1072.9	75.8
0°-40°	1347.7	95.2
0°-60°	1413.3	99.8
0°-90°	1415.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1415.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1842	
5°	1823	170
15°	1525	423
25°	1055	479
35°	423	275
45°	68	60
55°	5	6
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P366046

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-WMH-BL89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	1842.2
2.5°	1837.0
5°	1823.1
7.5°	1775.1
10°	1713.6
12.5°	1625.9
15°	1525.2
17.5°	1409.5
20°	1287.2
22.5°	1172.5
25°	1055.3
27.5°	931.4
30°	793.6
32.5°	625.2
35°	422.9
37.5°	267.4
40°	177.6
42.5°	113.6
45°	68.2
47.5°	37.2
50°	18.6
52.5°	7.7
55°	4.6
57.5°	3.6
60°	2.6
62.5°	2.1
65°	1.5
67.5°	1.5
70°	1.0
72.5°	1.0
75°	1.0
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)