

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364633

Luminaire Tested: **FLD6BX20D010-FEU6B12-8027-F6LBXVM1-LI-BTR89BI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364633
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-LI-BTR89BI
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR RFI 0.125", 2000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1411.0 lumens
Efficiency: N/A
Efficacy: 69.5 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 20.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364633

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-LI-BTR89BI

Luminous Intensity Polar Plot

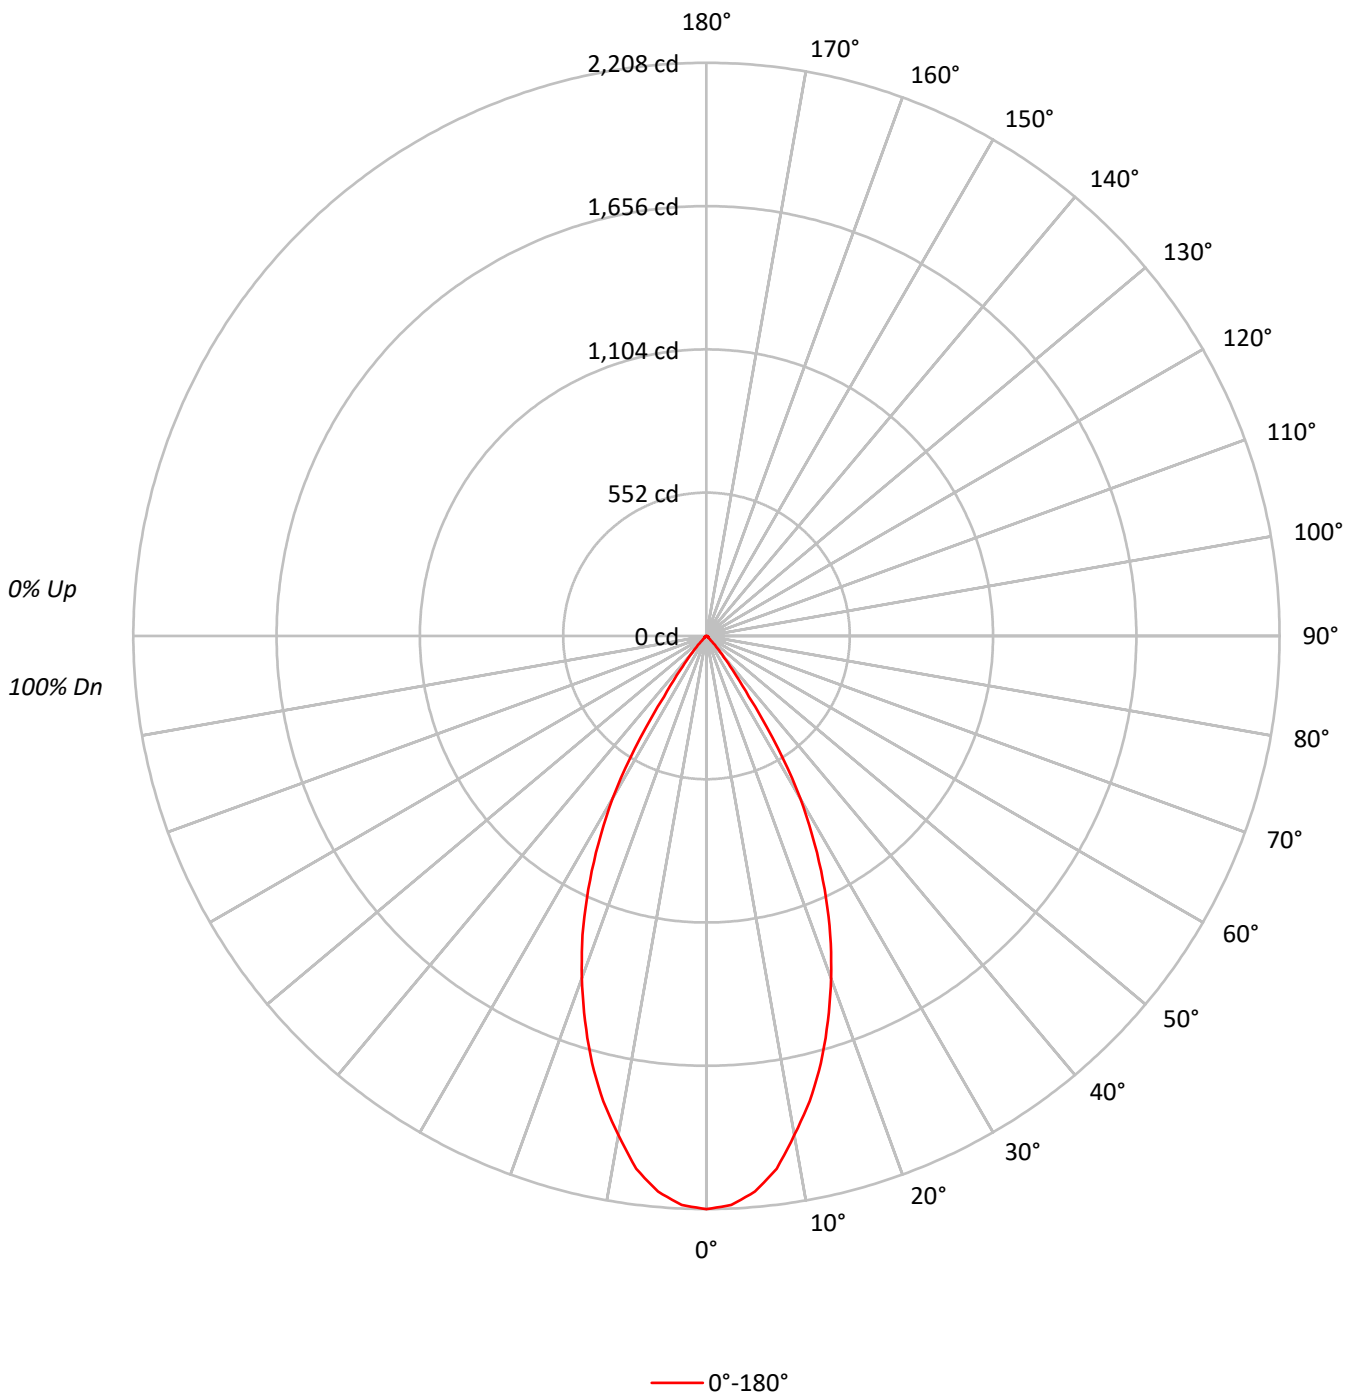



TEST NUMBER: P364633

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-LI-BTR89BI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158104
5°	154431
10°	141937
15°	126321
20°	106996
25°	85087
30°	59818
35°	24964
40°	8618
45°	2228
50°	1125
55°	1036
60°	1017
65°	1017
70°	1005
75°	1328
80°	1484
85°	2465



TEST NUMBER: P364633

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-LI-BTR89BI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	198.9	14.1
10°-20°	472.1	33.5
20°-30°	487.1	34.5
30°-40°	207.2	14.7
40°-50°	24.9	1.8
50°-60°	7.5	0.5
60°-70°	5.9	0.4
70°-80°	4.8	0.3
80°-90°	2.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1158.1	82.1
0°-40°	1365.2	96.8
0°-60°	1397.6	99.0
0°-90°	1411.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1411.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2208	
5°	2149	199
15°	1704	472
25°	1077	487
35°	286	207
45°	22	25
55°	8	7
65°	6	6
75°	5	5
85°	3	3
90°	0	



TEST NUMBER: P364633

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-LI-BTR89BI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2208.1
2.5°	2193.8
5°	2148.6
7.5°	2070.1
10°	1952.2
12.5°	1836.2
15°	1704.1
17.5°	1555.4
20°	1404.2
22.5°	1246.6
25°	1077.0
27.5°	902.0
30°	723.5
32.5°	512.9
35°	285.6
37.5°	164.2
40°	92.2
42.5°	47.6
45°	22.0
47.5°	11.9
50°	10.1
52.5°	8.9
55°	8.3
57.5°	7.7
60°	7.1
62.5°	6.5
65°	6.0
67.5°	5.4
70°	4.8
72.5°	4.8
75°	4.8
77.5°	4.2
80°	3.6
82.5°	3.6
85°	3.0
87.5°	1.8
90°	0.0

(END OF REPORT)