

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365351

Luminaire Tested: **FLD6BX20D010-FEU6B12-8027-F6LBXVM1-MW-BTR86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365351
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-17)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-MW-BTR86
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 2000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1100.0 lumens
Efficiency: N/A
Efficacy: 54.2 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 20.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365351

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-MW-BTR86

Luminous Intensity Polar Plot

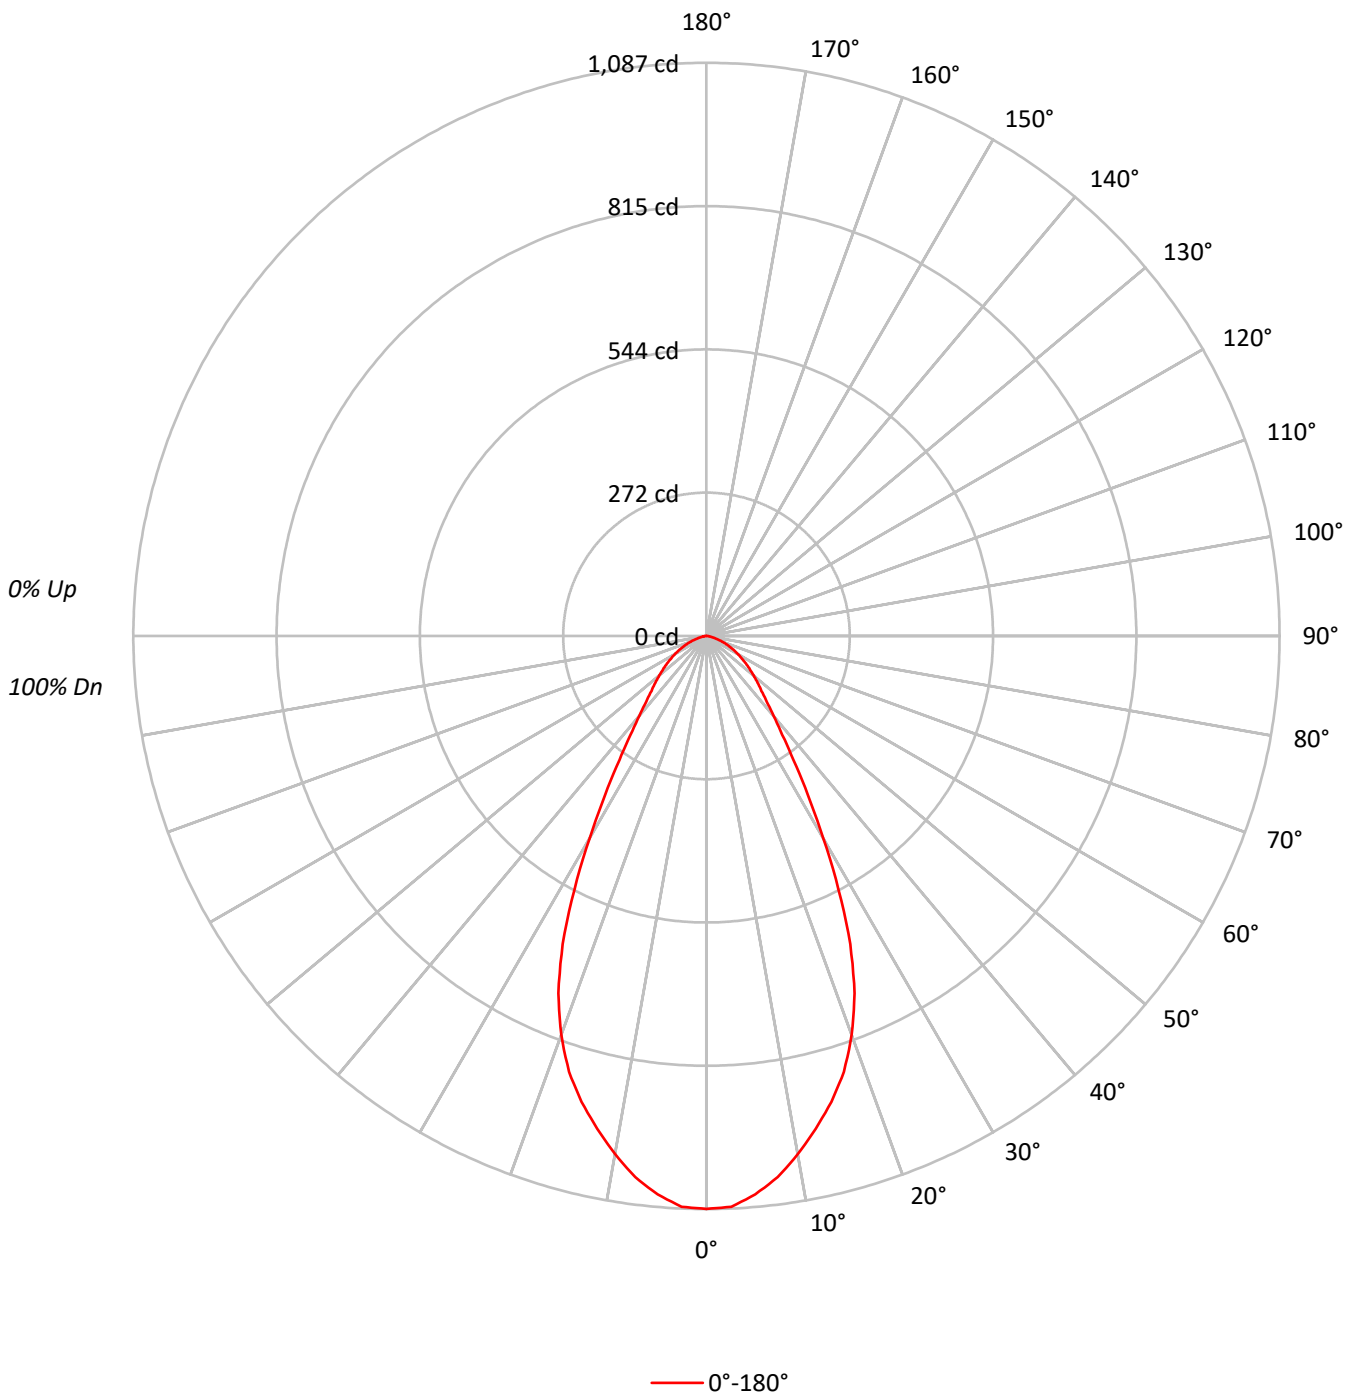



TEST NUMBER: P365351

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-MW-BTR86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	98	93	89	94	91	87		91	88	85		88	86	84	82
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	72	69	68
5	87	78	71	66	86	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	66	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	51	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	77810
5°	76396
10°	72546
15°	67812
20°	61362
25°	50965
30°	36569
35°	25095
40°	18470
45°	14926
50°	12977
55°	11410
60°	9867
65°	8403
70°	6595
75°	4620
80°	2928
85°	3204



TEST NUMBER: P365351

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-MW-BTR86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.4	9.0
10°-20°	255.3	23.2
20°-30°	289.5	26.3
30°-40°	185.6	16.9
40°-50°	116.3	10.6
50°-60°	82.0	7.5
60°-70°	49.3	4.5
70°-80°	18.8	1.7
80°-90°	3.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	644.2	58.6
0°-40°	829.8	75.4
0°-60°	1028.1	93.5
0°-90°	1100.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1100.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1087	
5°	1063	99
15°	915	255
25°	645	290
35°	287	186
45°	147	116
55°	91	82
65°	50	49
75°	17	19
85°	4	4
90°	0	



TEST NUMBER: P365351

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-MW-BTR86

CANDELA DISTRIBUTION (FULL):

0°	
0°	1086.7
2.5°	1083.5
5°	1062.9
7.5°	1035.2
10°	997.8
12.5°	957.3
15°	914.8
17.5°	866.5
20°	805.3
22.5°	733.9
25°	645.1
27.5°	542.7
30°	442.3
32.5°	357.3
35°	287.1
37.5°	236.3
40°	197.6
42.5°	169.3
45°	147.4
47.5°	131.3
50°	116.5
52.5°	103.6
55°	91.4
57.5°	79.8
60°	68.9
62.5°	59.2
65°	49.6
67.5°	40.6
70°	31.5
72.5°	23.8
75°	16.7
77.5°	11.6
80°	7.1
82.5°	4.5
85°	3.9
87.5°	1.9
90°	0.0

(END OF REPORT)