

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366065

Luminaire Tested: **FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BL89BW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366065
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-46)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BL89BW
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS ACRYLIC OPAL SMOOTH, CLEAR 0.125", 2000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1298.0 lumens
Efficiency: N/A
Efficacy: 63.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 20.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366065

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BL89BW

Luminous Intensity Polar Plot

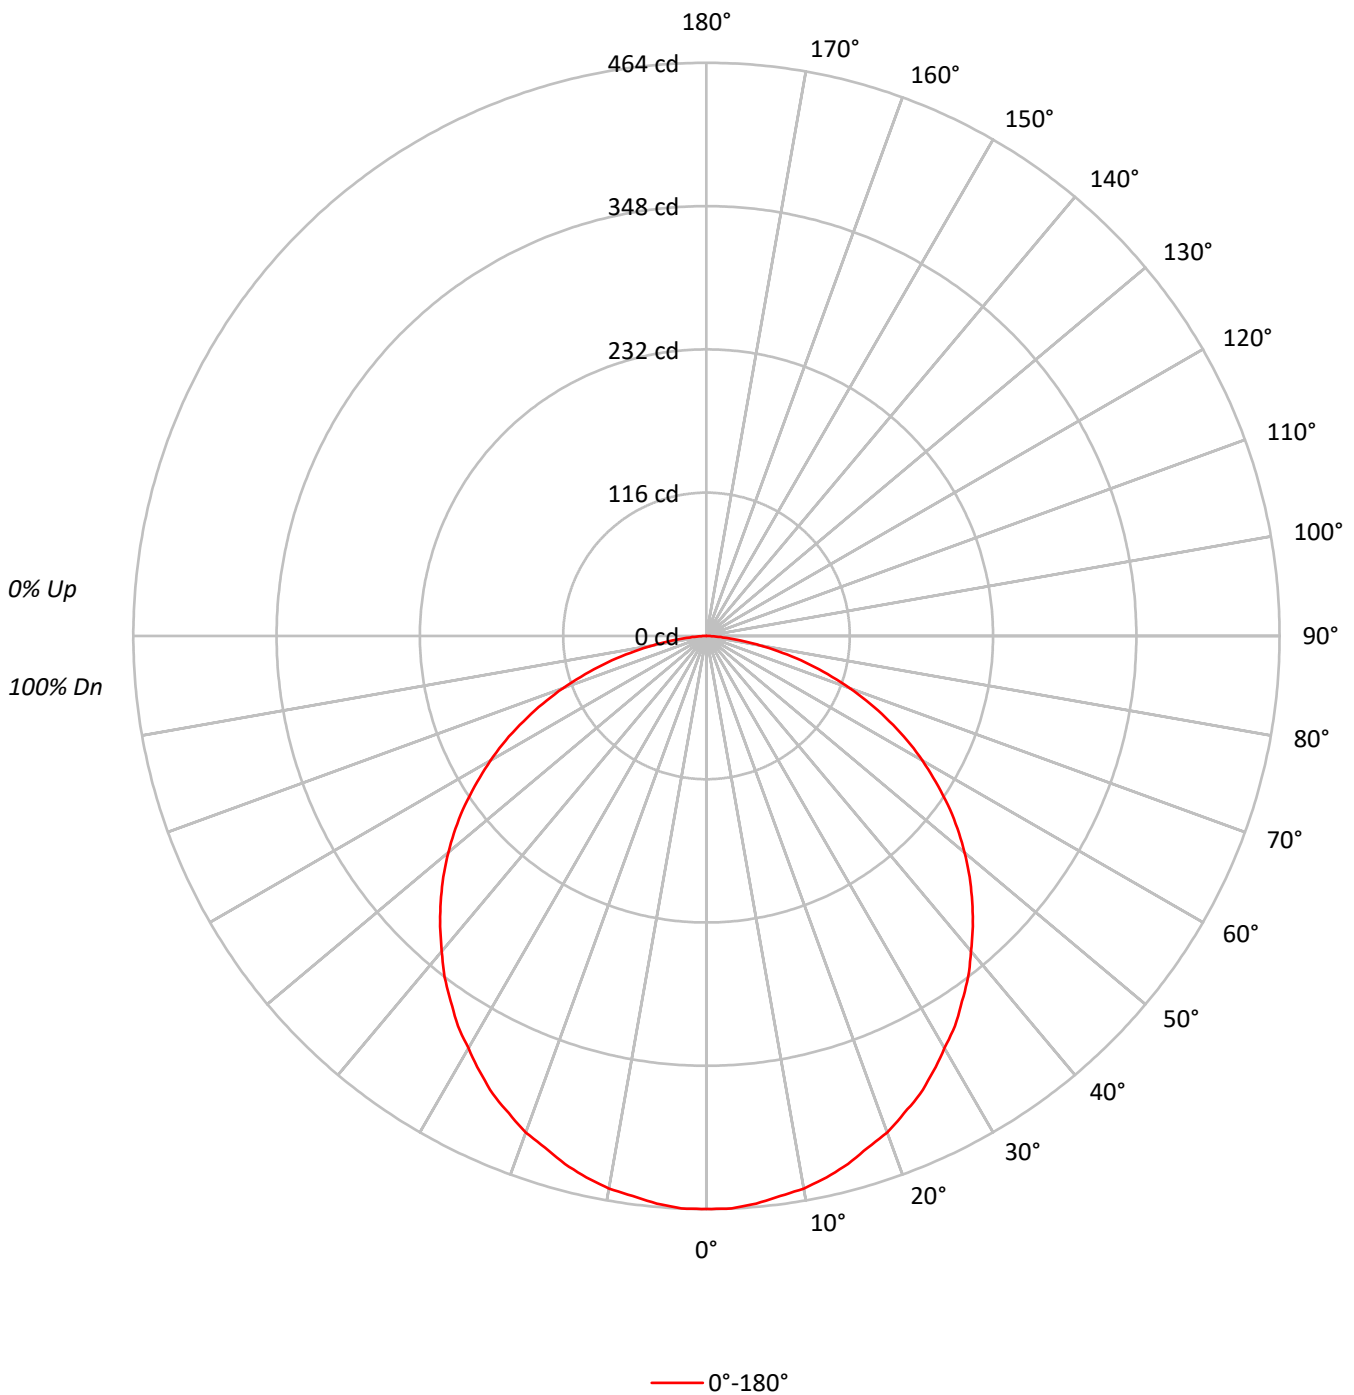



TEST NUMBER: P366065

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BL89BW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92		94	91	89		90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	76		82	78	74		79	75	72	70
3	90	80	72	65	88	78	71	64	75	69	63		72	67	62		70	65	61	59
4	83	71	62	55	80	69	61	55	67	60	54		64	58	53		62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	47		58	51	46		56	50	46	43
6	70	57	48	41	68	56	47	41	54	46	41		52	45	40		51	45	40	38
7	65	51	43	36	63	51	42	36	49	41	36		48	41	36		46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32		44	37	32		42	36	32	30
9	56	43	35	29	55	42	35	29	41	34	29		40	34	29		39	33	29	27
10	53	40	32	26	52	39	32	26	38	31	26		37	31	26		36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	12672
5°	12649
10°	12598
15°	12516
20°	12435
25°	12333
30°	12156
35°	12034
40°	11885
45°	11755
50°	11593
55°	11368
60°	11035
65°	10561
70°	9863
75°	8760
80°	6984
85°	4231



TEST NUMBER: P366065

CATALOG NUMBER: FLD6BX20D010-FEUG6B12-8027-F6LBXVM1-WMH-BL89BW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.8	3.4
10°-20°	124.8	9.6
20°-30°	188.2	14.5
30°-40°	225.9	17.4
40°-50°	234.7	18.1
50°-60°	213.0	16.4
60°-70°	161.6	12.4
70°-80°	87.8	6.8
80°-90°	18.3	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	356.8	27.5
0°-40°	582.8	44.9
0°-60°	1030.4	79.4
0°-90°	1298.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1298.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	464	
5°	461	44
15°	443	125
25°	409	188
35°	361	226
45°	304	235
55°	239	213
65°	163	162
75°	83	88
85°	14	18
90°	0	



TEST NUMBER: P366065

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BL89BW

CANDELA DISTRIBUTION (FULL):

	0°
0°	463.9
2.5°	463.9
5°	461.3
7.5°	457.4
10°	454.2
12.5°	449.1
15°	442.6
17.5°	434.3
20°	427.8
22.5°	418.2
25°	409.2
27.5°	397.6
30°	385.4
32.5°	374.4
35°	360.9
37.5°	348.1
40°	333.3
42.5°	319.1
45°	304.3
47.5°	288.9
50°	272.8
52.5°	256.1
55°	238.7
57.5°	220.0
60°	202.0
62.5°	183.4
65°	163.4
67.5°	143.5
70°	123.5
72.5°	102.9
75°	83.0
77.5°	63.1
80°	44.4
82.5°	27.7
85°	13.5
87.5°	3.9
90°	0.0

(END OF REPORT)