

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366073

Luminaire Tested: **FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BTR89BI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366073  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-28)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BTR89BI  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM ACRYLIC, CLEAR RFI 0.125", 2000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1383.1 lumens  
Efficiency: N/A  
Efficacy: 68.1 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366073

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BTR89BI

### Luminous Intensity Polar Plot

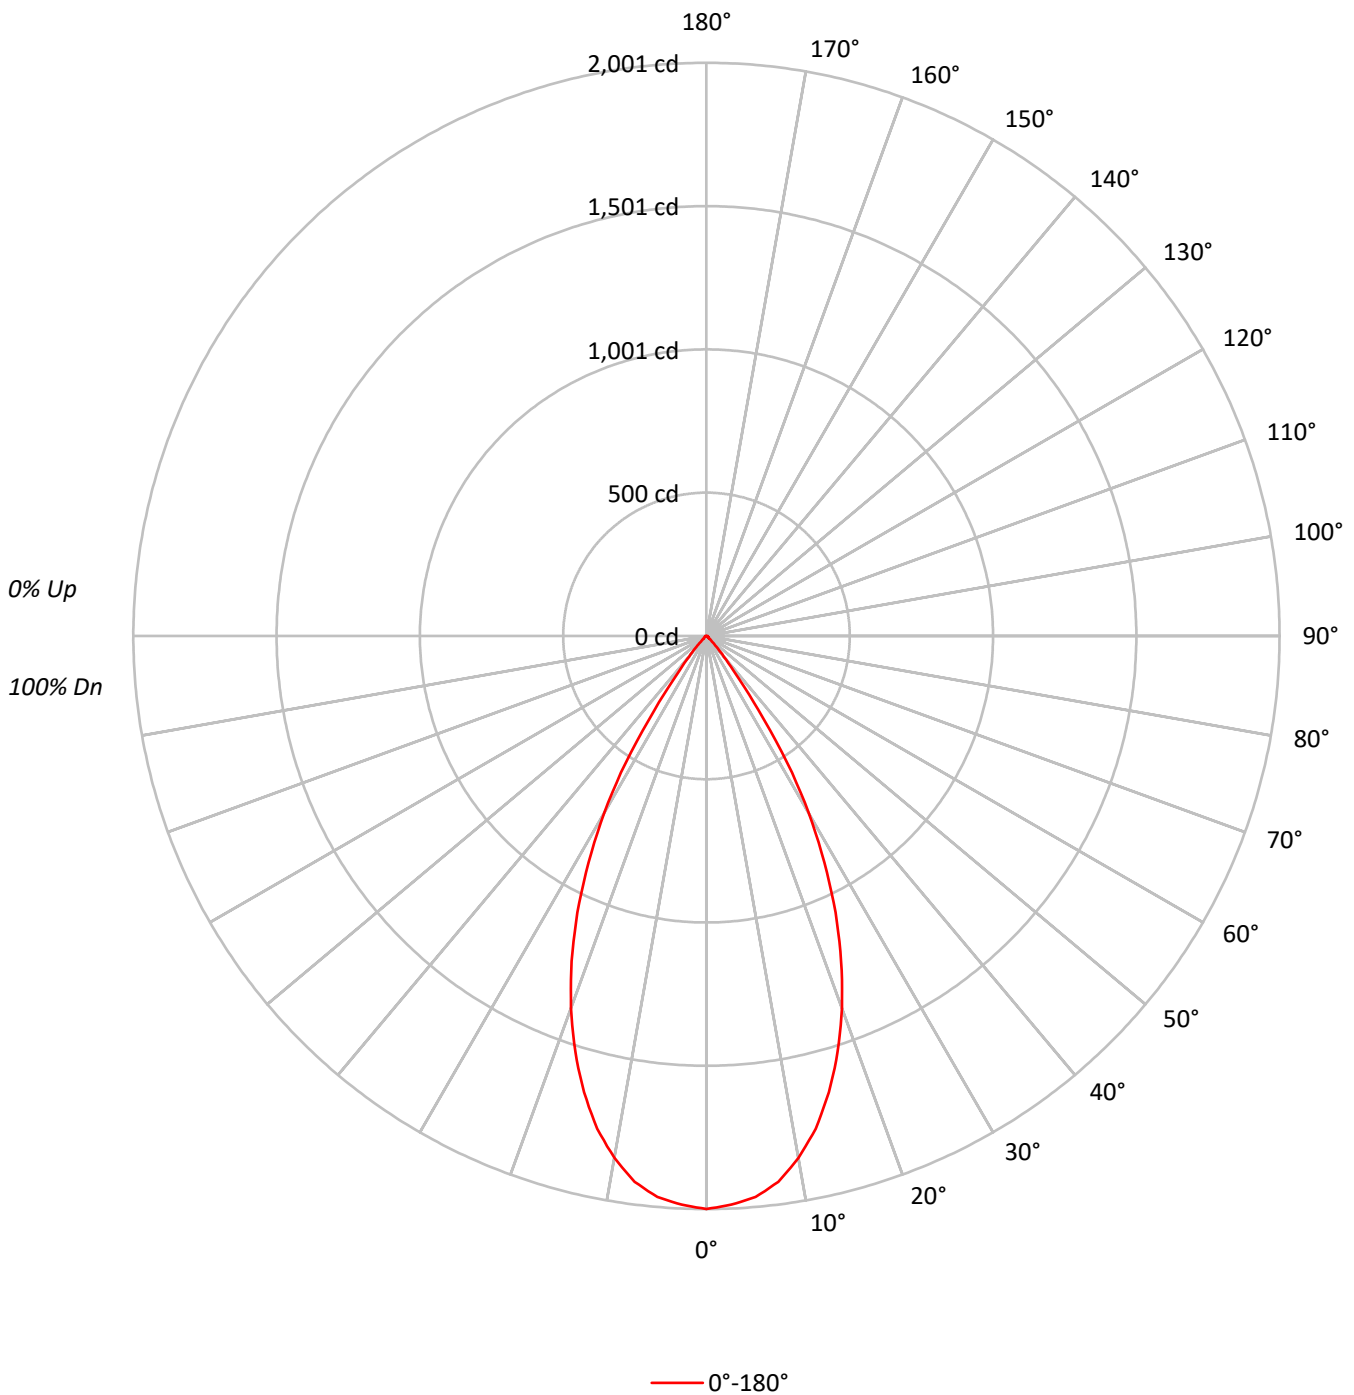



TEST NUMBER: P366073

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BTR89BI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	143254
5°	141321
10°	134521
15°	122288
20°	105304
25°	84179
30°	59024
35°	27455
40°	8674
45°	2714
50°	1192
55°	1111
60°	1017
65°	915
70°	1005
75°	1162
80°	1484
85°	2465



TEST NUMBER: P366073

CATALOG NUMBER: FLD6BX20D010-FEUG6B12-8027-F6LBXVM1-WMH-BTR89BI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	184.1	13.3
10°-20°	457.4	33.1
20°-30°	480.9	34.8
30°-40°	213.4	15.4
40°-50°	26.7	1.9
50°-60°	8.0	0.6
60°-70°	5.6	0.4
70°-80°	4.4	0.3
80°-90°	2.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1122.4	81.2
0°-40°	1335.7	96.6
0°-60°	1370.4	99.1
0°-90°	1383.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1383.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2001	
5°	1966	184
15°	1650	457
25°	1066	481
35°	314	213
45°	27	27
55°	9	8
65°	5	6
75°	4	4
85°	3	3
90°	0	



TEST NUMBER: P366073

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8027-F6LBXVM1-WMH-BTR89BI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2000.7
2.5°	1987.6
5°	1966.2
7.5°	1922.2
10°	1850.2
12.5°	1762.2
15°	1649.7
17.5°	1523.0
20°	1382.0
22.5°	1229.1
25°	1065.5
27.5°	891.8
30°	713.9
32.5°	525.3
35°	314.1
37.5°	167.2
40°	92.8
42.5°	50.6
45°	26.8
47.5°	13.1
50°	10.7
52.5°	9.5
55°	8.9
57.5°	8.3
60°	7.1
62.5°	6.5
65°	5.4
67.5°	4.8
70°	4.8
72.5°	4.2
75°	4.2
77.5°	4.2
80°	3.6
82.5°	3.0
85°	3.0
87.5°	1.8
90°	0.0

(END OF REPORT)