

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364663

Luminaire Tested: **FLD6BX20D010-FEU6B12-8035-F6LBXVM1-LI-BTR81**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364663
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-25)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX20D010-FEU6B12-8035-F6LBXVM1-LI-BTR81
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 2000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1513.0 lumens
Efficiency: N/A
Efficacy: 74.5 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.19
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 20.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364663

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8035-F6LBXVM1-LI-BTR81

Luminous Intensity Polar Plot

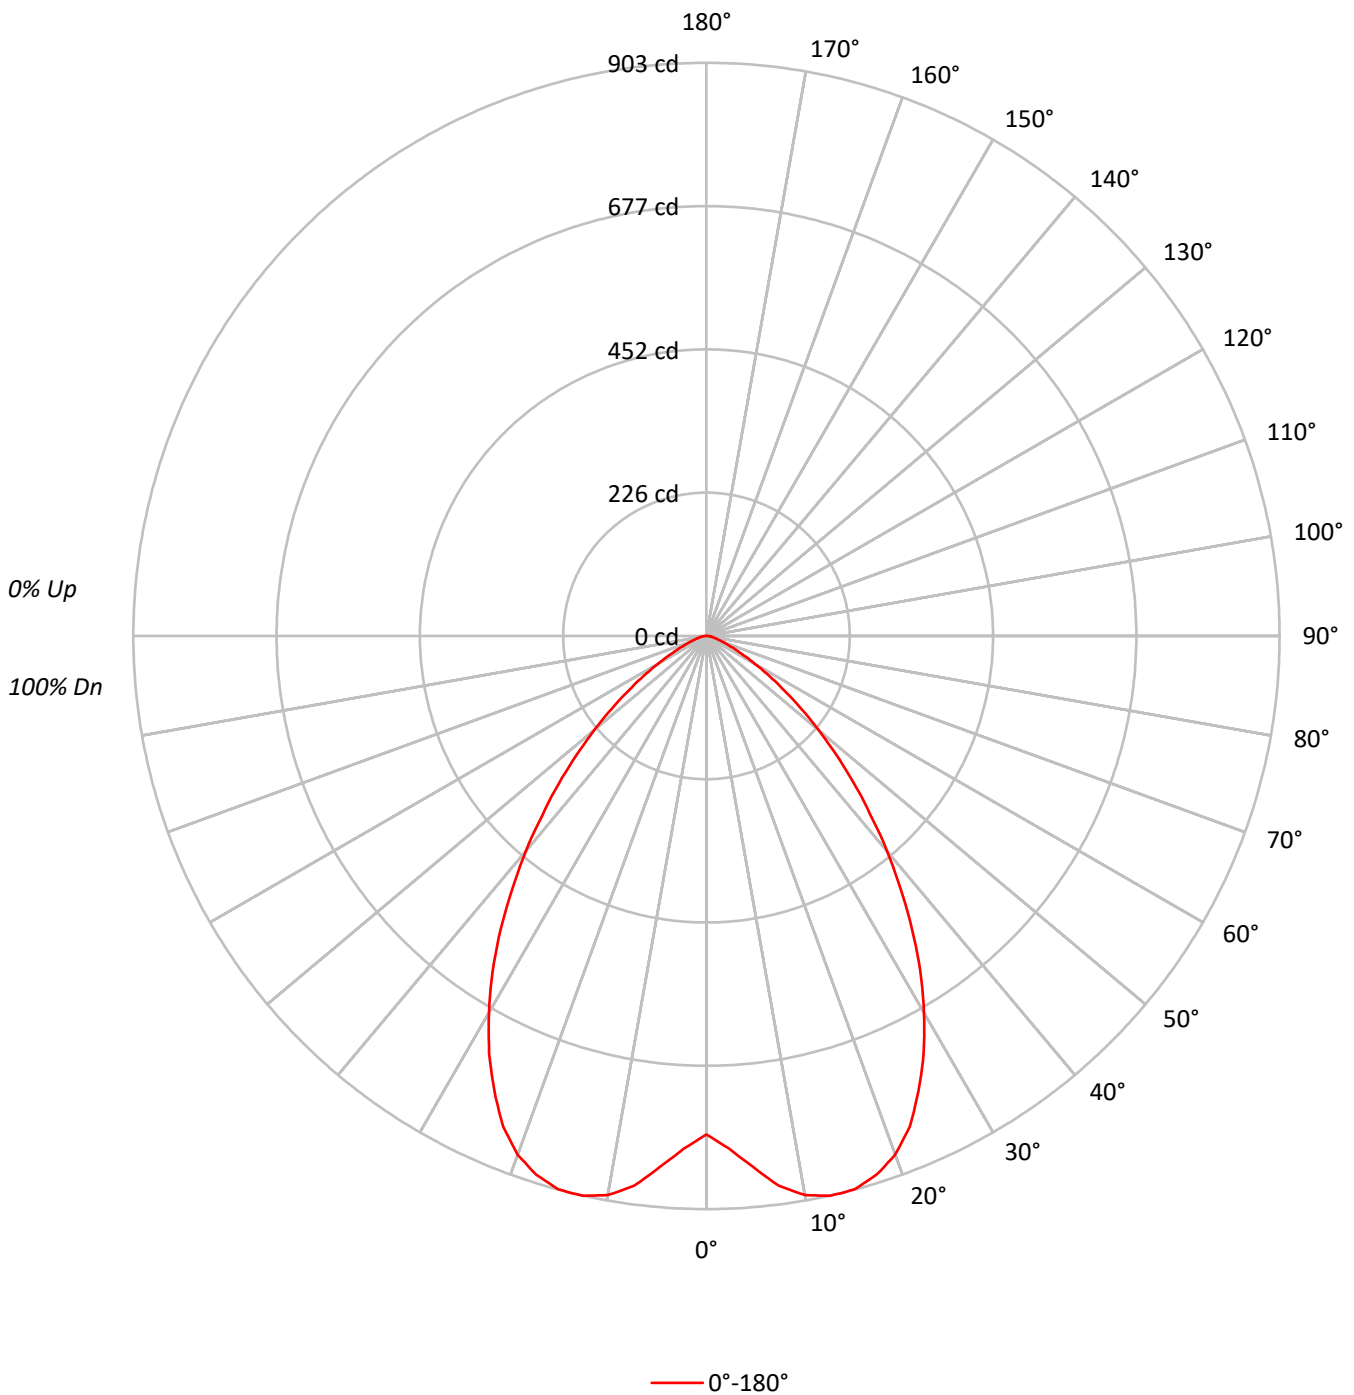



TEST NUMBER: P364663

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8035-F6LBXVM1-LI-BTR81

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80	76	73	72
4	91	81	74	69	89	80	73	68	78	72	68		75	71	67		73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	61		69	64	60		68	63	59	58
6	79	68	61	55	77	67	60	55	66	59	55		64	58	54		63	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50		59	54	49		58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	42		51	46	41		50	45	41	40
10	62	50	43	39	61	50	43	38	49	43	38		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	56229
5°	60339
10°	65029
15°	66908
20°	66269
25°	62476
30°	56651
35°	49404
40°	41416
45°	33335
50°	25676
55°	18663
60°	12674
65°	8370
70°	5464
75°	4177
80°	3670
85°	4518



TEST NUMBER: P364663

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8035-F6LBXVM1-LI-BTR81

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.0	5.4
10°-20°	253.2	16.7
20°-30°	361.6	23.9
30°-40°	351.8	23.2
40°-50°	254.4	16.8
50°-60°	136.4	9.0
60°-70°	51.4	3.4
70°-80°	16.9	1.1
80°-90°	5.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	696.7	46.0
0°-40°	1048.5	69.3
0°-60°	1439.4	95.1
0°-90°	1513.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1513.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	785	
5°	840	82
15°	903	253
25°	791	362
35°	565	352
45°	329	254
55°	150	136
65°	49	51
75°	15	17
85°	6	5
90°	0	



TEST NUMBER: P364663

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8035-F6LBXVM1-LI-BTR81

CANDELA DISTRIBUTION (FULL):

0°	
0°	785.3
2.5°	808.0
5°	839.5
7.5°	873.8
10°	894.4
12.5°	903.3
15°	902.6
17.5°	890.3
20°	869.7
22.5°	836.8
25°	790.8
27.5°	741.4
30°	685.2
32.5°	627.6
35°	565.2
37.5°	502.1
40°	443.1
42.5°	382.7
45°	329.2
47.5°	277.1
50°	230.5
52.5°	187.2
55°	149.5
57.5°	117.3
60°	88.5
62.5°	66.5
65°	49.4
67.5°	35.7
70°	26.1
72.5°	19.9
75°	15.1
77.5°	11.7
80°	8.9
82.5°	6.9
85°	5.5
87.5°	2.7
90°	0.0

(END OF REPORT)