

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P236165

Luminaire Tested: **FLD6BX30D010 EU6B3/58040 F6LBXVM1LIBL85**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P236165
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010 EU6B3/58040 F6LBXVM1LIBL85
Description: FAILSAFE 6 INCH RECESSED LED DOWNLIGHT
6" LED Vandal Resistant, Medium (50° Beam), Specular Clear, Bottom lens,
0.187" clear polycarbonate
Light Source: (1) 4000K CCT, 80 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2328.1 lumens
Efficiency: N/A
Efficacy: 83.1 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P236165

CATALOG NUMBER: FLD6BX30D010 EU6B3/58040 F6LBXVM1LIBL85

Luminous Intensity Polar Plot

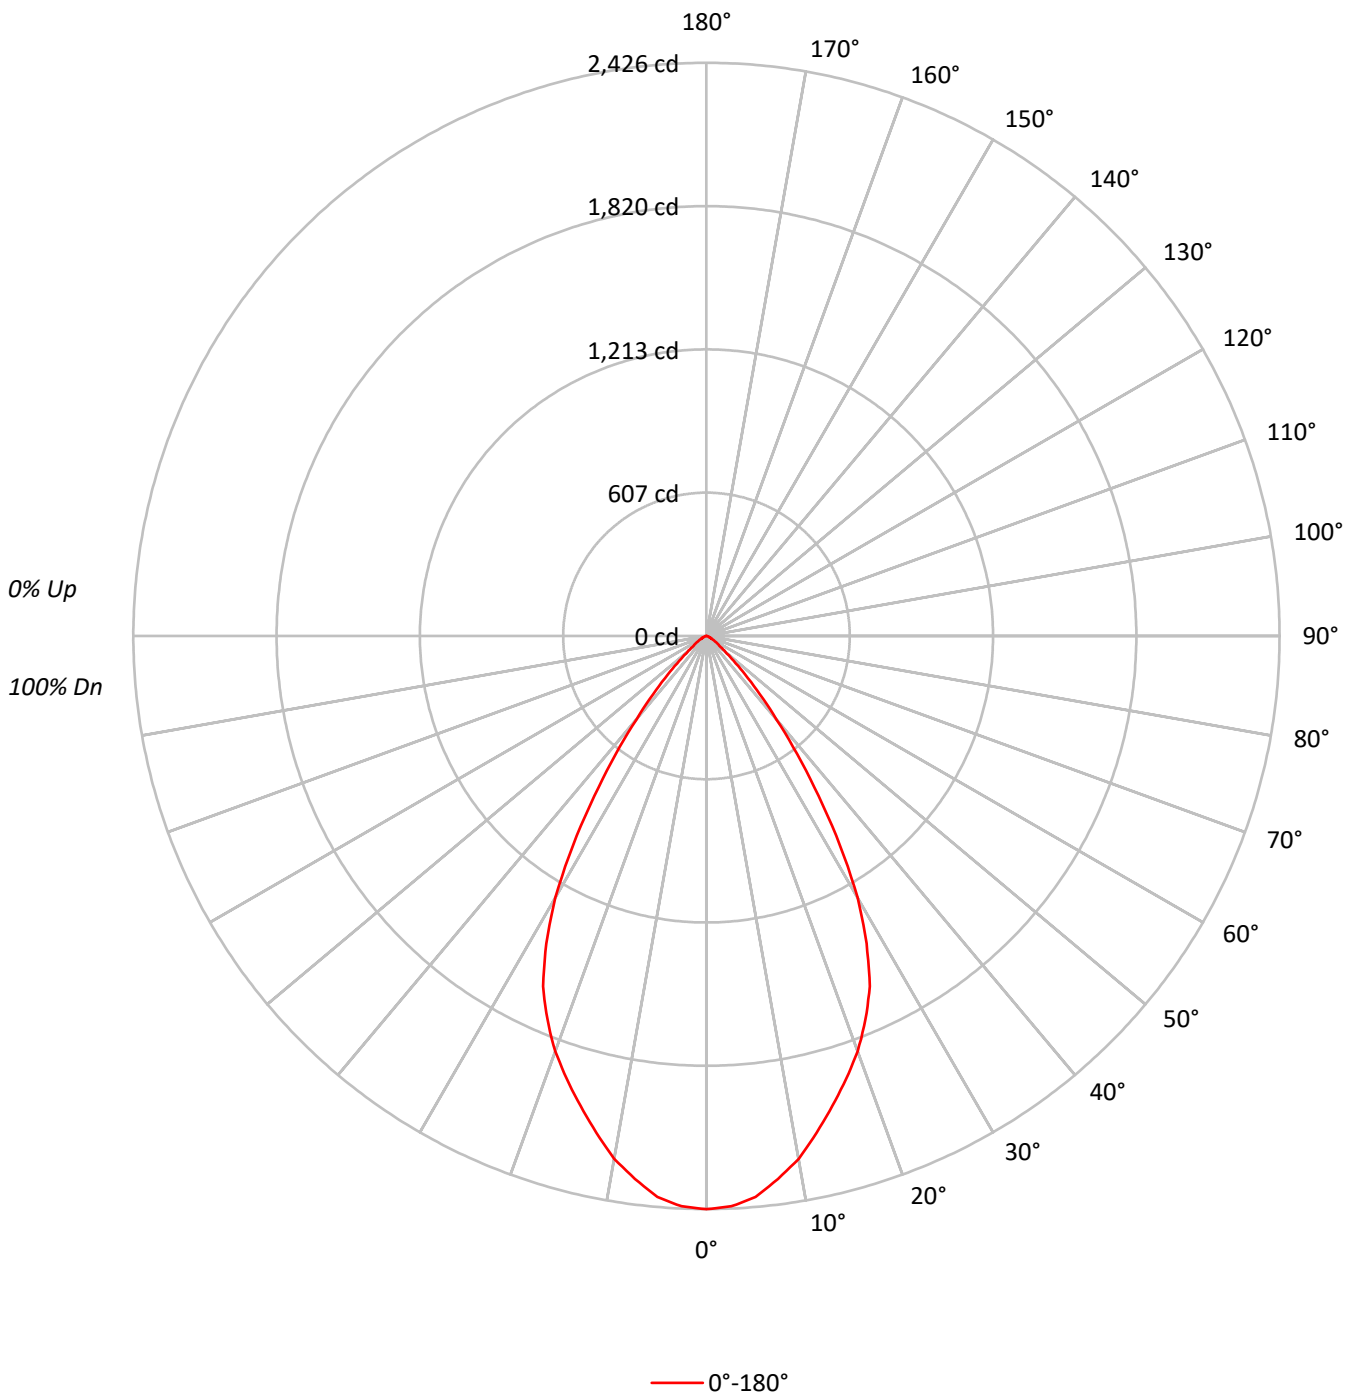



TEST NUMBER: P236165

CATALOG NUMBER: FLD6BX30D010 EU6B3/58040 F6LBXVM1LIBL85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79
4	96	88	82	78	94	87	82	77	85	80	77	83	79	76	81	78	75	73
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158280
5°	156108
10°	148884
15°	139089
20°	129920
25°	117782
30°	96344
35°	65905
40°	39244
45°	21258
50°	10495
55°	6415
60°	4293
65°	2902
70°	1793
75°	1185
80°	1766
85°	0



TEST NUMBER: P236165

CATALOG NUMBER: FLD6BX30D010 EU6B3/58040 F6LBXVM1LIBL85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	222.9	9.6
10°-20°	578.3	24.8
20°-30°	736.9	31.6
30°-40°	520.8	22.4
40°-50°	190.1	8.2
50°-60°	52.7	2.3
60°-70°	19.1	0.8
70°-80°	6.8	0.3
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1538.0	66.1
0°-40°	2058.8	88.4
0°-60°	2301.6	98.9
0°-90°	2328.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2328.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2426	
5°	2384	223
15°	2059	578
25°	1636	737
35°	828	521
45°	230	190
55°	56	53
65°	19	19
75°	5	7
85°	0	1
90°	0	



TEST NUMBER: P236165

CATALOG NUMBER: FLD6BX30D010 EU6B3/58040 F6LBXVM1LIBL85

CANDELA DISTRIBUTION (FULL):

0°	
0°	2426.1
2.5°	2416.7
5°	2383.7
7.5°	2317.9
10°	2247.4
12.5°	2153.4
15°	2059.3
17.5°	1965.3
20°	1871.3
22.5°	1758.4
25°	1636.2
27.5°	1466.9
30°	1278.9
32.5°	1053.2
35°	827.5
37.5°	630.0
40°	460.8
42.5°	333.8
45°	230.4
47.5°	155.2
50°	103.4
52.5°	70.5
55°	56.4
57.5°	42.3
60°	32.9
62.5°	23.5
65°	18.8
67.5°	14.1
70°	9.4
72.5°	9.4
75°	4.7
77.5°	4.7
80°	4.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)