

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364713

Luminaire Tested: **FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BL89AM**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364713
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-44)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BL89AM
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,
BOTTOM LENS POLYCARBONATE, OPAL SMOOTH 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1076.9 lumens
Efficiency: N/A
Efficacy: 39.9 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.37
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364713

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BL89AM

Luminous Intensity Polar Plot

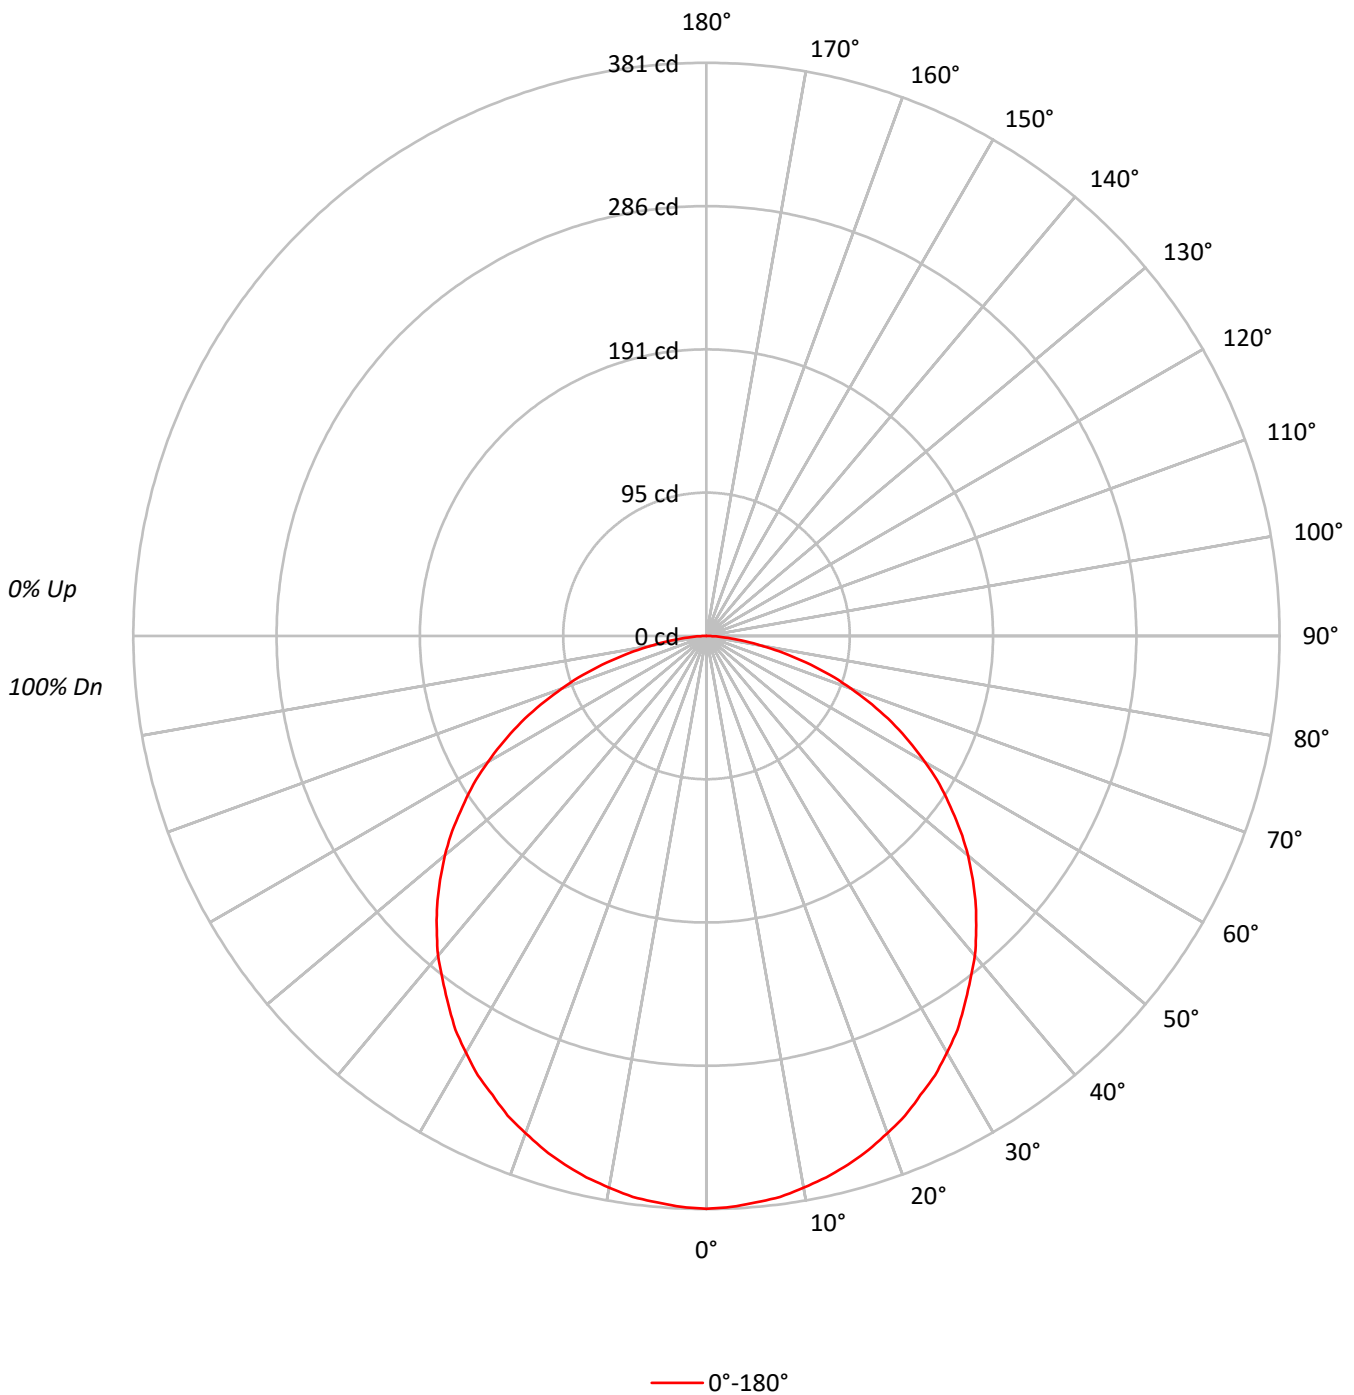



TEST NUMBER: P364713

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	104	100	96	106	102	98	94	98	94	91		94	91	89		90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	75		82	78	74		79	75	72	70
3	90	80	71	65	88	78	70	64	75	68	63		72	67	62		70	65	61	59
4	82	70	62	55	80	69	61	54	67	59	54		64	58	53		62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46		58	51	46		56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41		52	45	40		51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36		47	41	36		46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32		43	37	32		42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29		40	33	29		39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26		37	31	26		36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	10402
5°	10365
10°	10329
15°	10291
20°	10223
25°	10148
30°	10087
35°	9977
40°	9899
45°	9781
50°	9646
55°	9425
60°	9172
65°	8790
70°	8162
75°	7229
80°	5899
85°	3824



TEST NUMBER: P364713

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.9	3.3
10°-20°	102.7	9.5
20°-30°	155.4	14.4
30°-40°	187.4	17.4
40°-50°	195.2	18.1
50°-60°	177.1	16.4
60°-70°	134.1	12.5
70°-80°	73.0	6.8
80°-90°	16.1	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	294.0	27.3
0°-40°	481.4	44.7
0°-60°	853.7	79.3
0°-90°	1076.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1076.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	381	
5°	378	36
15°	364	103
25°	337	155
35°	299	187
45°	253	195
55°	198	177
65°	136	134
75°	68	73
85°	12	16
90°	0	



TEST NUMBER: P364713

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BL89AM

CANDELA DISTRIBUTION (FULL):

	0°
0°	380.8
2.5°	379.9
5°	378.0
7.5°	376.1
10°	372.4
12.5°	368.6
15°	363.9
17.5°	358.3
20°	351.7
22.5°	345.2
25°	336.7
27.5°	329.2
30°	319.8
32.5°	310.5
35°	299.2
37.5°	288.0
40°	277.6
42.5°	265.4
45°	253.2
47.5°	240.1
50°	227.0
52.5°	212.9
55°	197.9
57.5°	183.8
60°	167.9
62.5°	151.9
65°	136.0
67.5°	119.1
70°	102.2
72.5°	86.3
75°	68.5
77.5°	52.5
80°	37.5
82.5°	23.4
85°	12.2
87.5°	4.7
90°	0.0

(END OF REPORT)