

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364723

Luminaire Tested: **FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364723
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BI
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR RFI 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2056.0 lumens
Efficiency: N/A
Efficacy: 76.1 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364723

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BI

Luminous Intensity Polar Plot

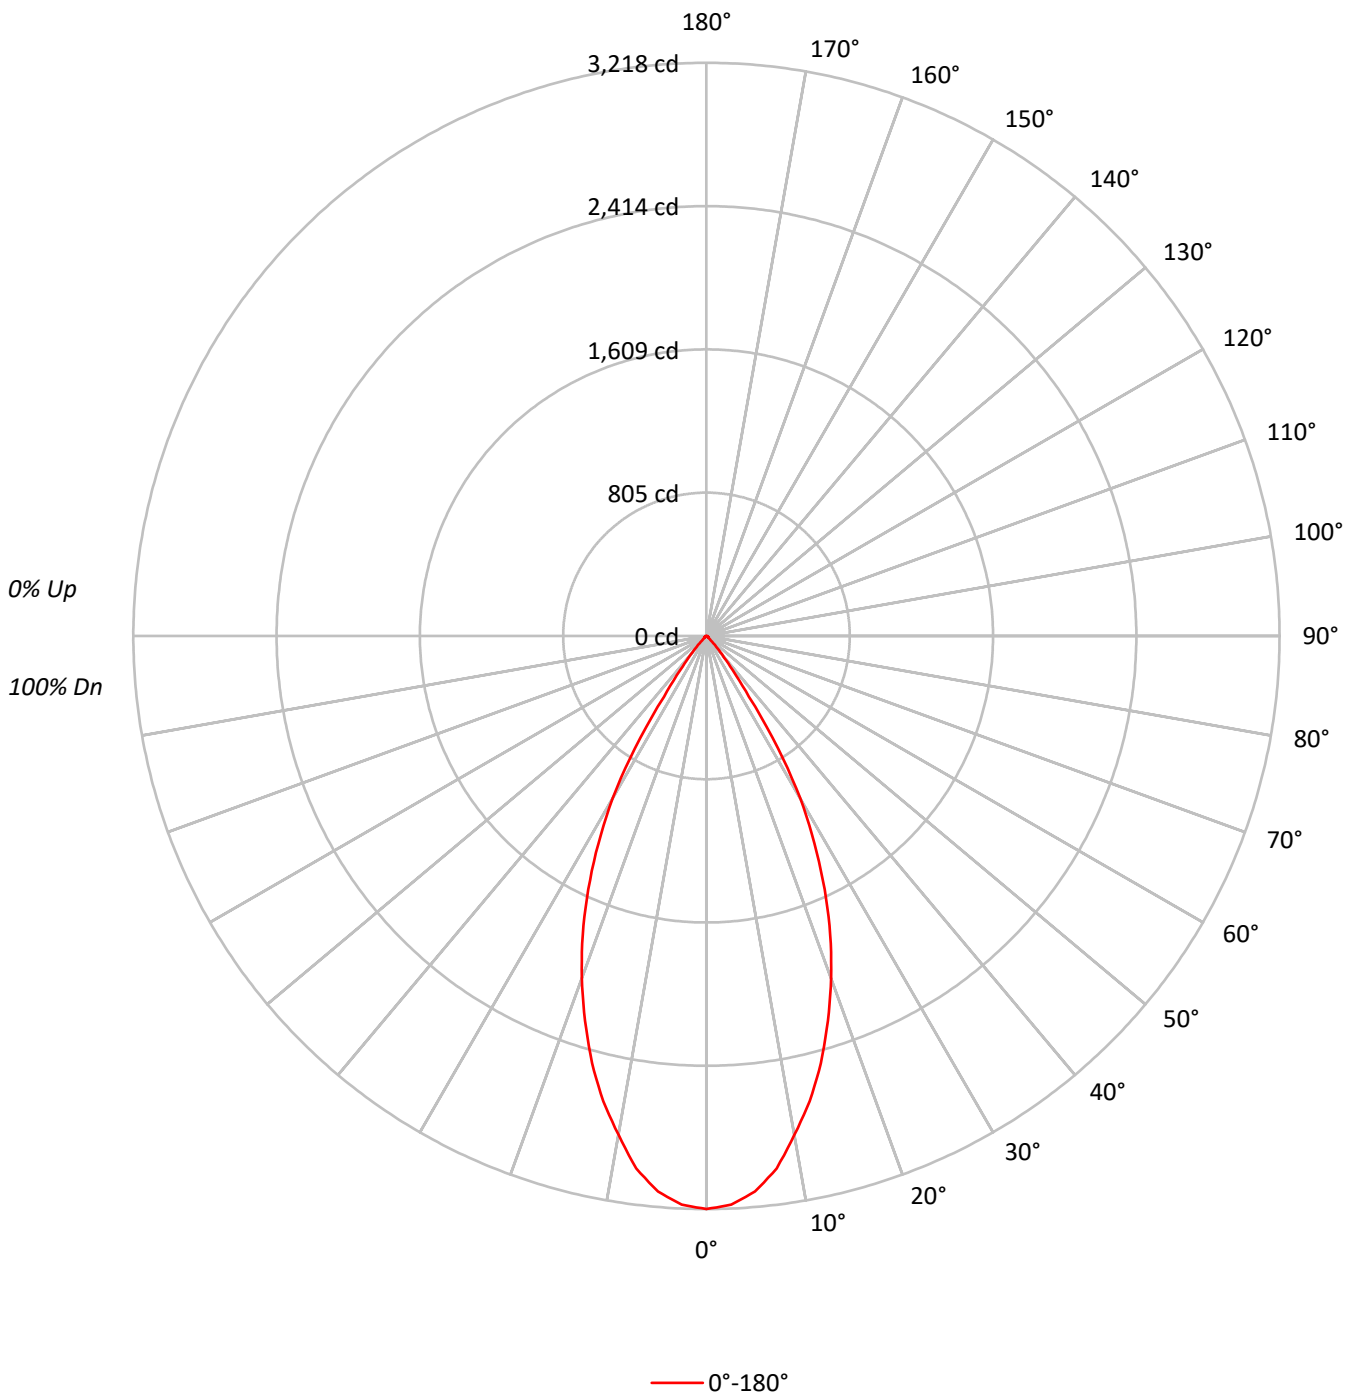



TEST NUMBER: P364723

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	79
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	230379
5°	225027
10°	206828
15°	184066
20°	155907
25°	123981
30°	87168
35°	36380
40°	12562
45°	3250
50°	1637
55°	1510
60°	1489
65°	1474
70°	1445
75°	1909
80°	2144
85°	3533



TEST NUMBER: P364723

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	289.8	14.1
10°-20°	687.9	33.5
20°-30°	709.8	34.5
30°-40°	301.9	14.7
40°-50°	36.2	1.8
50°-60°	10.9	0.5
60°-70°	8.6	0.4
70°-80°	6.9	0.3
80°-90°	4.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1687.5	82.1
0°-40°	1989.4	96.8
0°-60°	2036.5	99.1
0°-90°	2056.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2056.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3218	
5°	3131	290
15°	2483	688
25°	1569	710
35°	416	302
45°	32	36
55°	12	11
65°	9	9
75°	7	7
85°	4	4
90°	0	



TEST NUMBER: P364723

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3217.5
2.5°	3196.7
5°	3130.8
7.5°	3016.3
10°	2844.7
12.5°	2675.6
15°	2483.1
17.5°	2266.4
20°	2046.1
22.5°	1816.4
25°	1569.3
27.5°	1314.4
30°	1054.3
32.5°	747.4
35°	416.2
37.5°	239.3
40°	134.4
42.5°	69.4
45°	32.1
47.5°	17.3
50°	14.7
52.5°	13.0
55°	12.1
57.5°	11.3
60°	10.4
62.5°	9.5
65°	8.7
67.5°	7.8
70°	6.9
72.5°	6.9
75°	6.9
77.5°	6.1
80°	5.2
82.5°	5.2
85°	4.3
87.5°	2.6
90°	0.0

(END OF REPORT)