

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366164

Luminaire Tested: **FLD6BX30D010-FEU6B35-8027-F6LBXVM1-WMH-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366164
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-28)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-WMH-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM ACRYLIC, CLEAR 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2180.0 lumens
Efficiency: N/A
Efficacy: 80.7 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366164

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-WMH-BTR89BV

Luminous Intensity Polar Plot

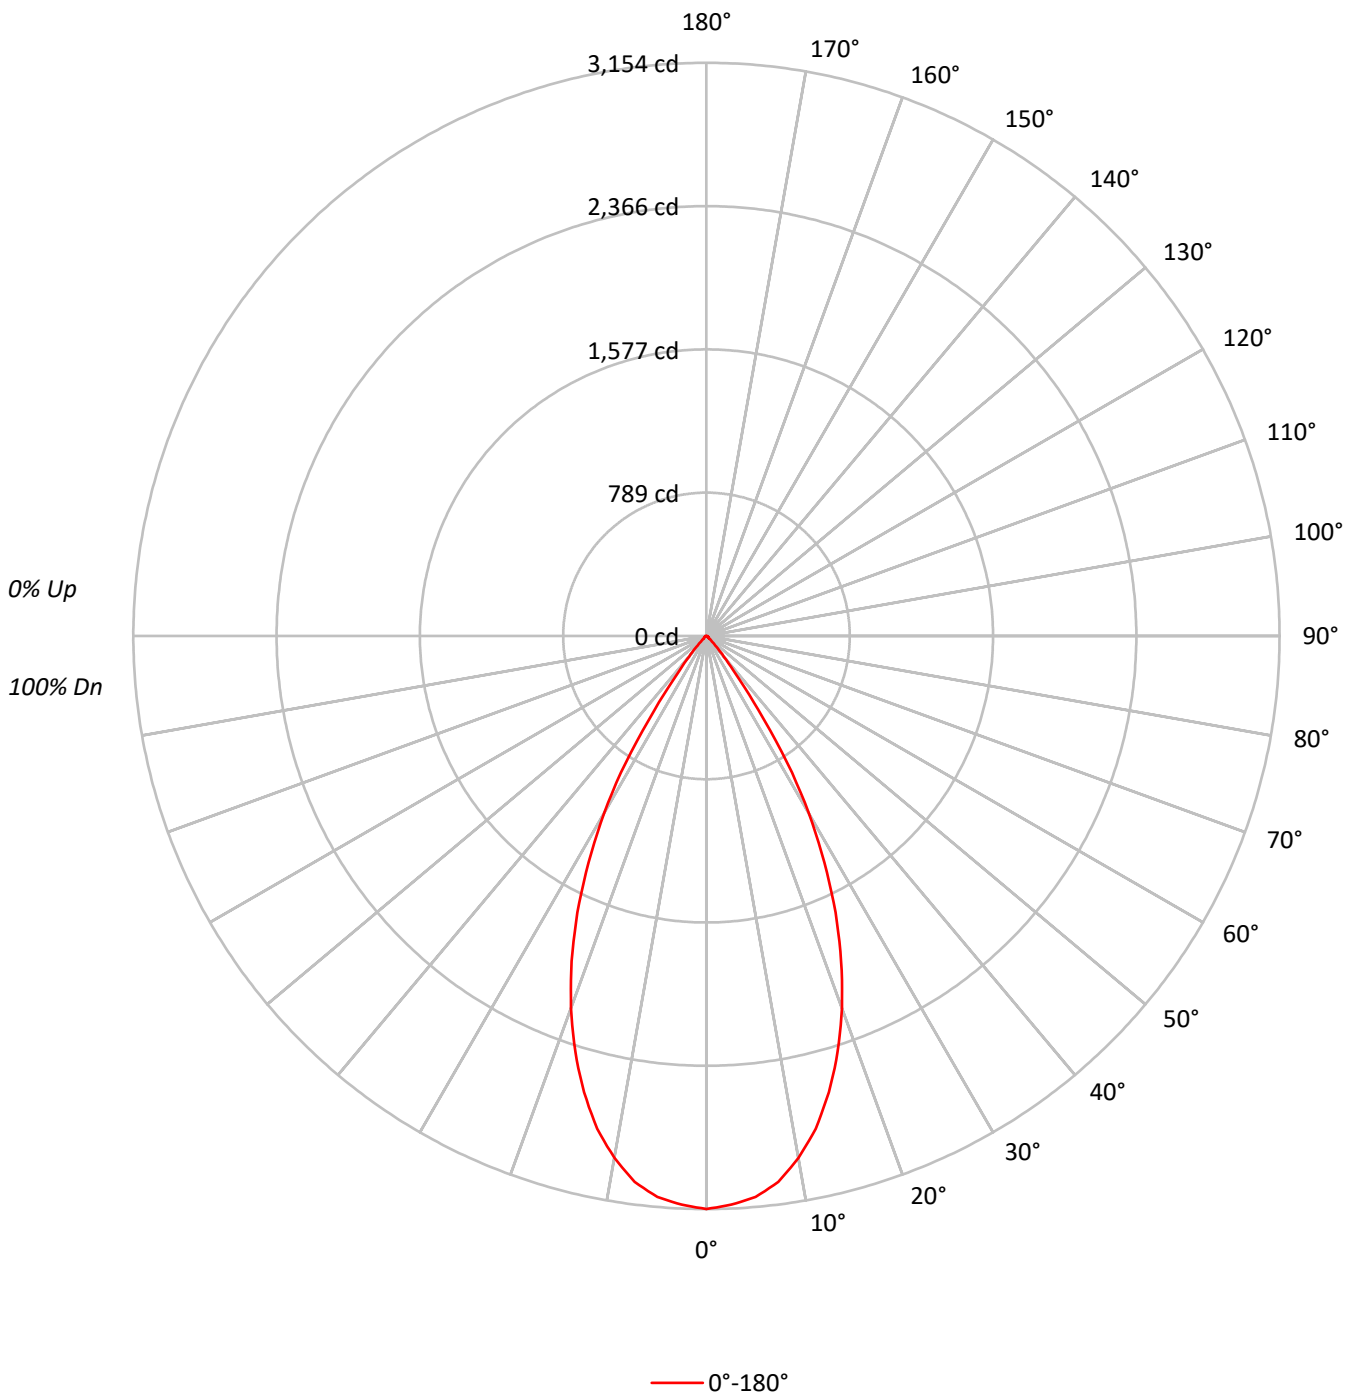



TEST NUMBER: P366164

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-WMH-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	225811
5°	222763
10°	212048
15°	192762
20°	165988
25°	132687
30°	93038
35°	43277
40°	13675
45°	4273
50°	1883
55°	1760
60°	1618
65°	1423
70°	1570
75°	1826
80°	2309
85°	3861



TEST NUMBER: P366164

CATALOG NUMBER: FLD6BX30D010-FEUGB35-8027-F6LBXVM1-WMH-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	290.1	13.3
10°-20°	721.0	33.1
20°-30°	758.0	34.8
30°-40°	336.3	15.4
40°-50°	42.1	1.9
50°-60°	12.6	0.6
60°-70°	8.8	0.4
70°-80°	7.0	0.3
80°-90°	4.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1769.2	81.2
0°-40°	2105.5	96.6
0°-60°	2160.1	99.1
0°-90°	2180.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2180.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3154	
5°	3099	290
15°	2600	721
25°	1680	758
35°	495	336
45°	42	42
55°	14	13
65°	8	9
75°	7	7
85°	5	4
90°	0	



TEST NUMBER: P366164

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8027-F6LBXVM1-WMH-BTR89BV

CANDELA DISTRIBUTION (FULL):

0°	
0°	3153.7
2.5°	3133.1
5°	3099.3
7.5°	3029.9
10°	2916.5
12.5°	2777.7
15°	2600.4
17.5°	2400.7
20°	2178.4
22.5°	1937.4
25°	1679.5
27.5°	1405.7
30°	1125.3
32.5°	828.1
35°	495.1
37.5°	263.5
40°	146.3
42.5°	79.7
45°	42.2
47.5°	20.6
50°	16.9
52.5°	15.0
55°	14.1
57.5°	13.1
60°	11.3
62.5°	10.3
65°	8.4
67.5°	7.5
70°	7.5
72.5°	6.6
75°	6.6
77.5°	6.6
80°	5.6
82.5°	4.7
85°	4.7
87.5°	2.8
90°	0.0

(END OF REPORT)