

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364740

Luminaire Tested: **FLD6BX30D010-FEU6B35-8030-F6LBXVM1-LI-BTR87**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364740  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-LI-BTR87  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 3000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2171.1 lumens  
Efficiency: N/A  
Efficacy: 80.4 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 27  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364740

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-LI-BTR87

### Luminous Intensity Polar Plot

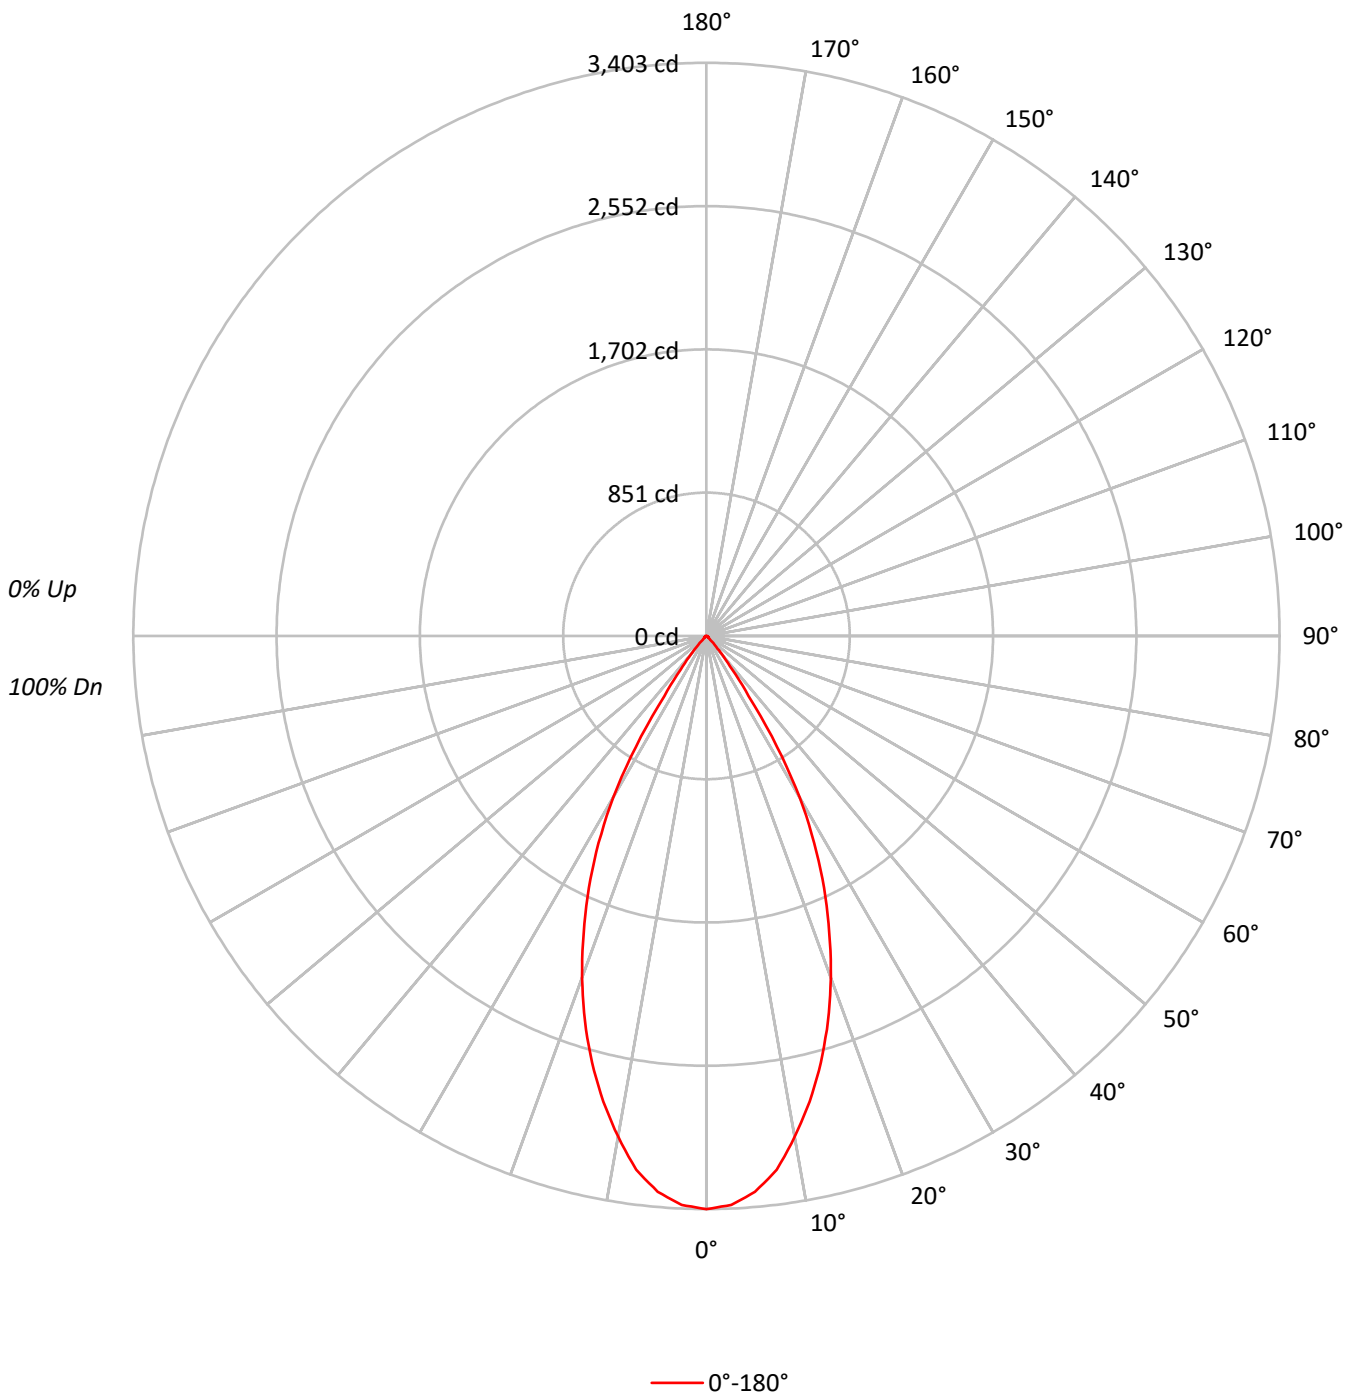



TEST NUMBER: P364740

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-LI-BTR87

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	243668
5°	238116
10°	219515
15°	194430
20°	164609
25°	130412
30°	91649
35°	38172
40°	13095
45°	3493
50°	1927
55°	1798
60°	1647
65°	1626
70°	1612
75°	1854
80°	2392
85°	3943



TEST NUMBER: P364740

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-LI-BTR87

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	307.0	14.1
10°-20°	727.6	33.5
20°-30°	747.0	34.4
30°-40°	316.3	14.6
40°-50°	38.9	1.8
50°-60°	12.9	0.6
60°-70°	9.5	0.4
70°-80°	7.4	0.3
80°-90°	4.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1781.6	82.1
0°-40°	2098.0	96.6
0°-60°	2149.7	99.0
0°-90°	2171.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2171.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3403	
5°	3313	307
15°	2623	728
25°	1651	747
35°	437	316
45°	34	39
55°	14	13
65°	10	10
75°	7	7
85°	5	4
90°	0	



TEST NUMBER: P364740

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-LI-BTR87

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3403.1
2.5°	3381.0
5°	3312.9
7.5°	3195.8
10°	3019.2
12.5°	2831.1
15°	2622.9
17.5°	2399.2
20°	2160.3
22.5°	1906.0
25°	1650.7
27.5°	1386.8
30°	1108.5
32.5°	781.2
35°	436.7
37.5°	250.5
40°	140.1
42.5°	73.9
45°	34.5
47.5°	20.2
50°	17.3
52.5°	15.4
55°	14.4
57.5°	13.4
60°	11.5
62.5°	10.6
65°	9.6
67.5°	8.6
70°	7.7
72.5°	7.7
75°	6.7
77.5°	6.7
80°	5.8
82.5°	5.8
85°	4.8
87.5°	2.9
90°	0.0

(END OF REPORT)