

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365450

Luminaire Tested: **FLD6BX30D010-FEU6B35-8030-F6LBXVM1-MW-BL87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365450
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-39)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-MW-BL87
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.375", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2130.0 lumens
Efficiency: N/A
Efficacy: 78.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365450

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-MW-BL87

Luminous Intensity Polar Plot

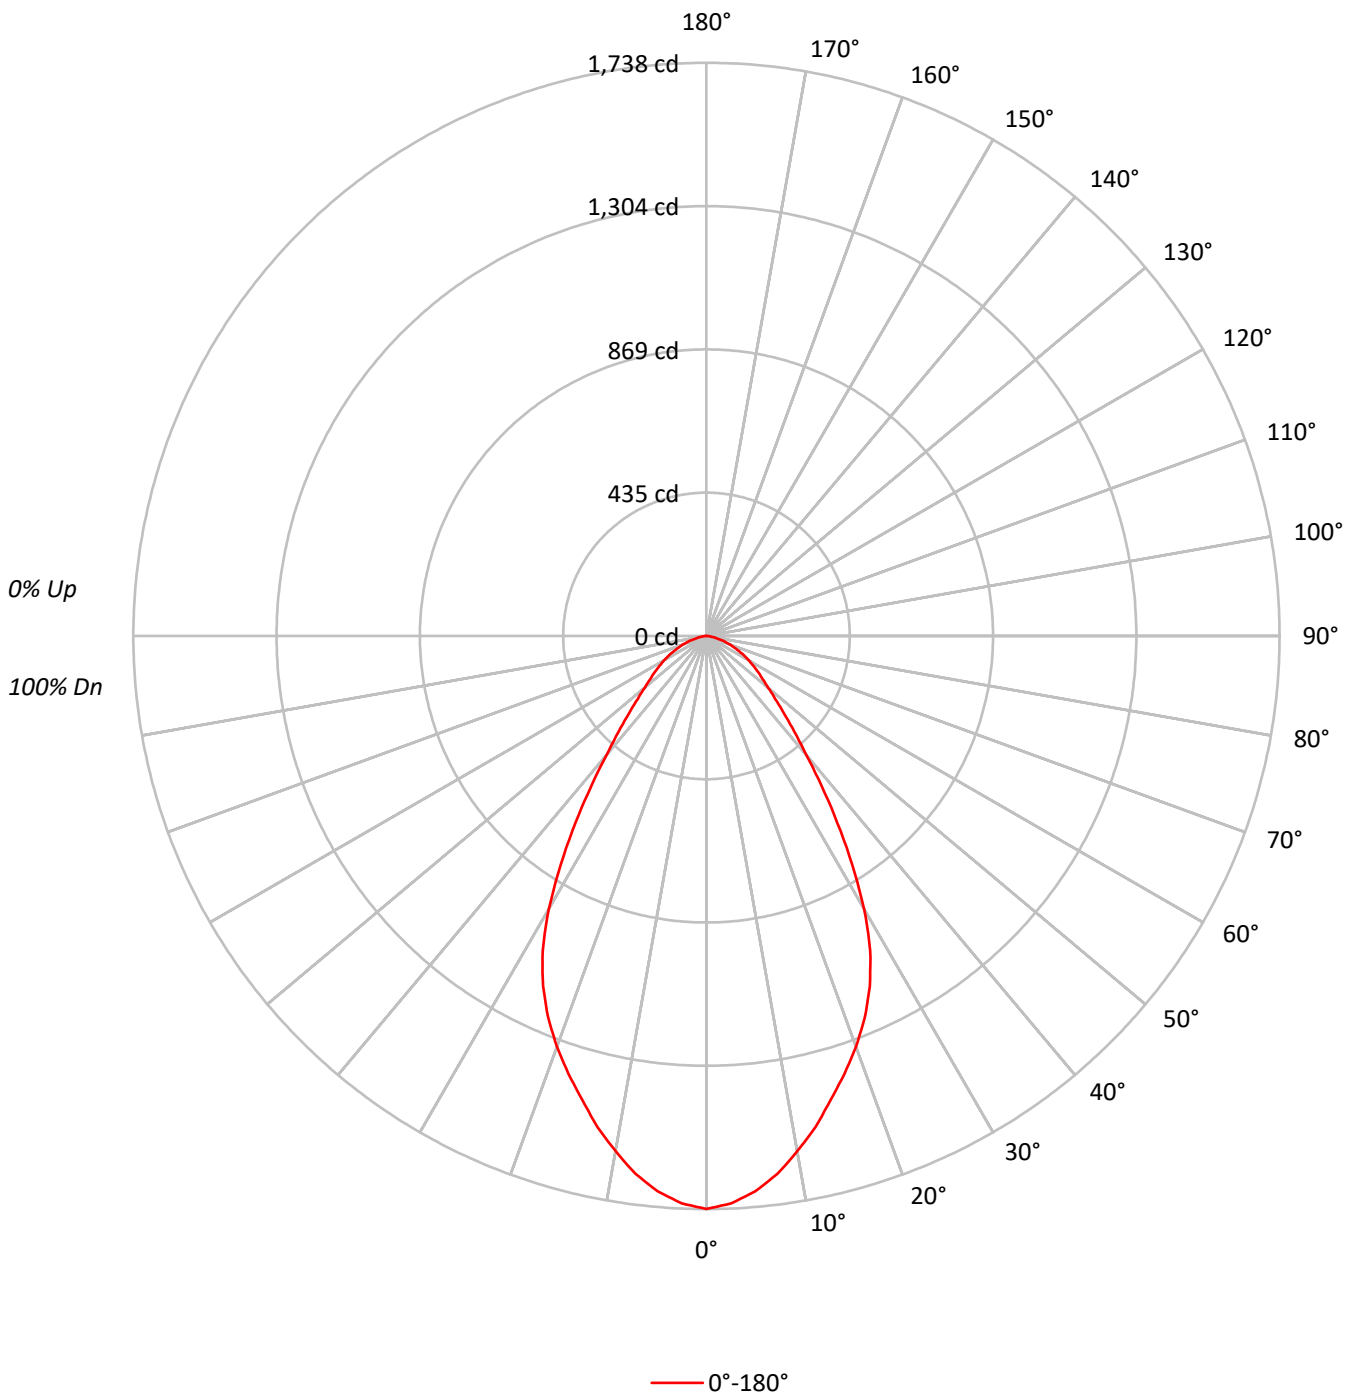



TEST NUMBER: P365450

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-MW-BL87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	98	89	83	78	95	88	82	78	85	80	76		83	78	75		80	77	74	72
4	91	82	75	70	89	81	74	69	78	73	68		76	71	68		74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62		70	65	61		69	64	61	59
6	80	69	62	57	79	69	62	57	67	61	56		65	60	56		64	59	56	54
7	75	64	57	52	74	64	57	52	62	56	52		61	55	51		60	55	51	49
8	71	60	53	48	70	59	53	48	58	52	48		57	51	47		56	51	47	46
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	47466
5°	46356
10°	44010
15°	41157
20°	38518
25°	35329
30°	30141
35°	23072
40°	16773
45°	12798
50°	10369
55°	9101
60°	8085
65°	7032
70°	5950
75°	4654
80°	3083
85°	1222



TEST NUMBER: P365450

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-MW-BL87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.1	7.4
10°-20°	409.3	19.2
20°-30°	532.1	25.0
30°-40°	433.7	20.4
40°-50°	261.9	12.3
50°-60°	172.0	8.1
60°-70°	108.6	5.1
70°-80°	47.5	2.2
80°-90°	6.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1099.5	51.6
0°-40°	1533.2	72.0
0°-60°	1967.0	92.3
0°-90°	2130.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2130.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1738	
5°	1691	158
15°	1455	409
25°	1172	532
35°	692	434
45°	331	262
55°	191	172
65°	109	109
75°	44	47
85°	4	7
90°	0	



TEST NUMBER: P365450

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-MW-BL87

CANDELA DISTRIBUTION (FULL):

0°	
0°	1737.7
2.5°	1722.0
5°	1690.6
7.5°	1645.5
10°	1586.7
12.5°	1526.0
15°	1455.4
17.5°	1391.7
20°	1325.1
22.5°	1253.5
25°	1172.2
27.5°	1075.1
30°	955.6
32.5°	822.3
35°	691.9
37.5°	572.4
40°	470.4
42.5°	394.0
45°	331.3
47.5°	282.3
50°	244.0
52.5°	214.6
55°	191.1
57.5°	168.6
60°	148.0
62.5°	128.4
65°	108.8
67.5°	91.1
70°	74.5
72.5°	58.8
75°	44.1
77.5°	30.4
80°	19.6
82.5°	10.8
85°	3.9
87.5°	1.0
90°	0.0

(END OF REPORT)