

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366180

Luminaire Tested: **FLD6BX30D010-FEU6B35-8030-F6LBXVM1-WMH-BTR87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366180
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-WMH-BTR87
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2138.1 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366180

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-WMH-BTR87

Luminous Intensity Polar Plot

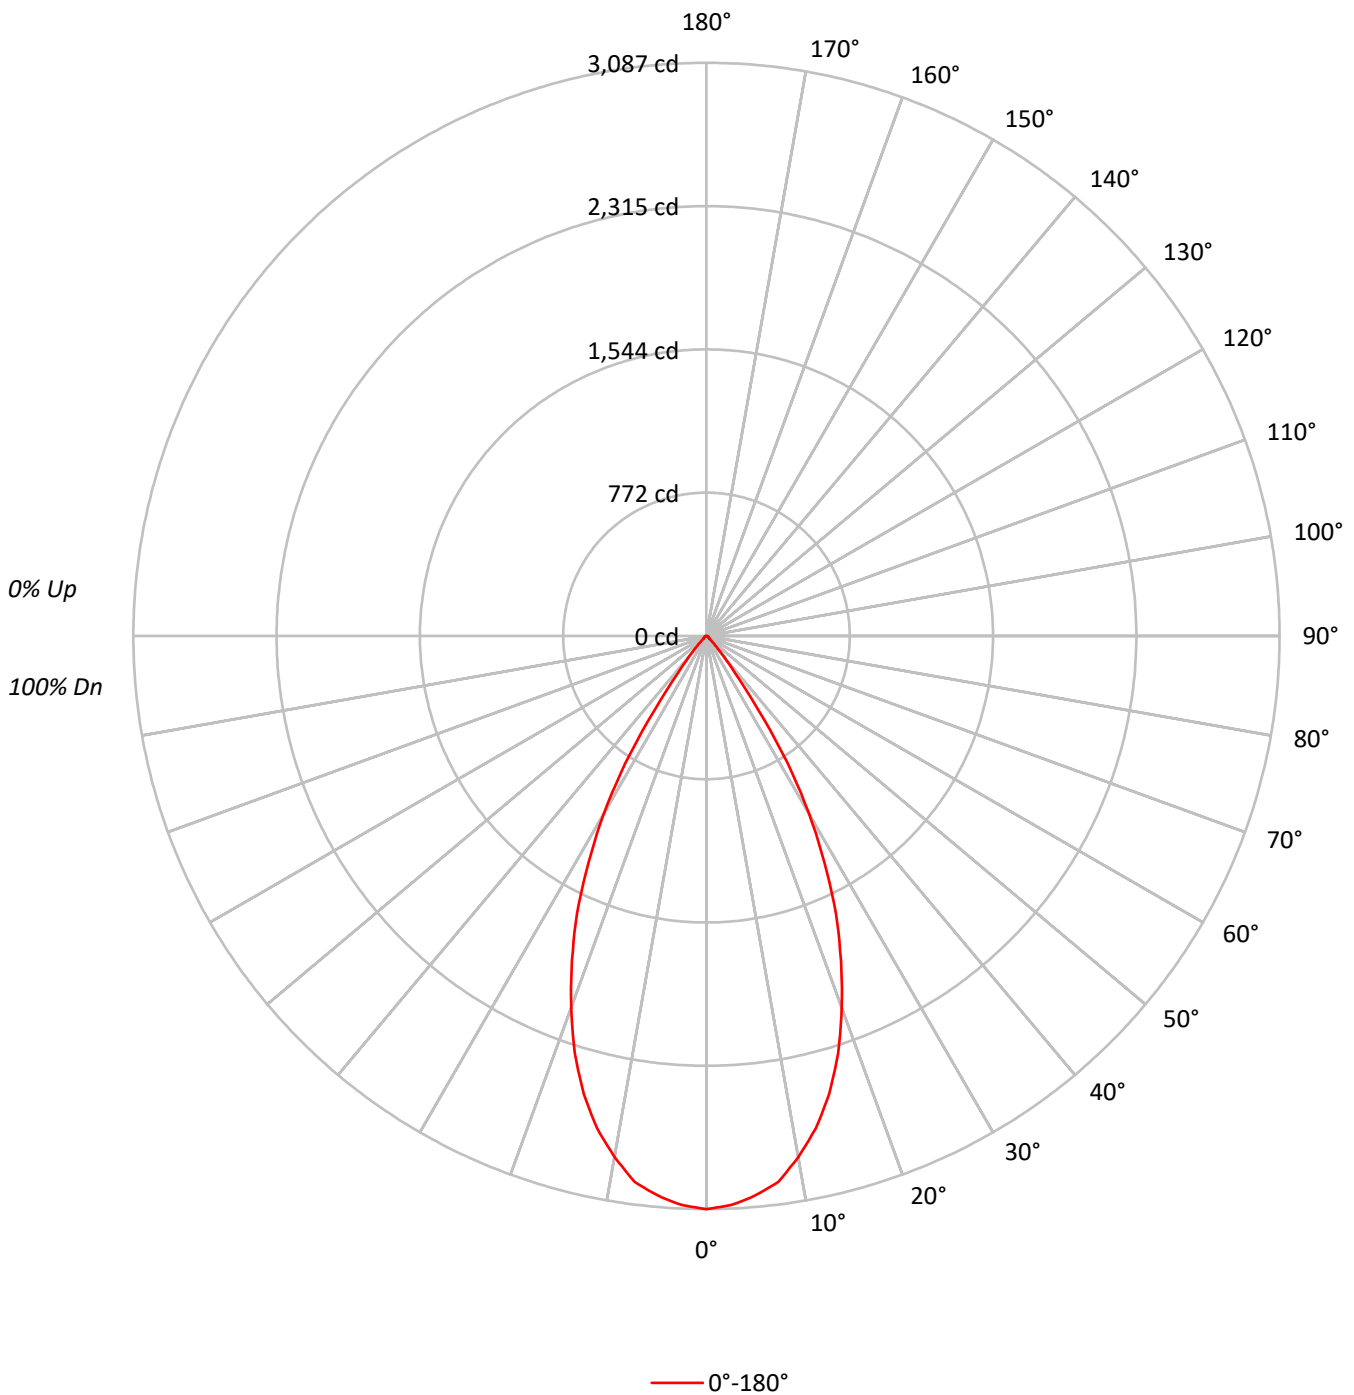



TEST NUMBER: P366180

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-WMH-BTR87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	221049
5°	217409
10°	207155
15°	189292
20°	162330
25°	130254
30°	91319
35°	42193
40°	13544
45°	4374
50°	2027
55°	1798
60°	1790
65°	1626
70°	1612
75°	1854
80°	2392
85°	3943



TEST NUMBER: P366180

CATALOG NUMBER: FLD6BX30D010-FEUGB35-8030-F6LBXVM1-WMH-BTR87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	283.7	13.3
10°-20°	706.6	33.1
20°-30°	742.1	34.7
30°-40°	329.3	15.4
40°-50°	42.6	2.0
50°-60°	13.3	0.6
60°-70°	9.4	0.4
70°-80°	6.9	0.3
80°-90°	4.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1732.4	81.0
0°-40°	2061.8	96.4
0°-60°	2117.6	99.0
0°-90°	2138.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2138.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3087	
5°	3025	284
15°	2554	707
25°	1649	742
35°	483	329
45°	43	43
55°	14	13
65°	10	9
75°	7	7
85°	5	4
90°	0	



TEST NUMBER: P366180

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8030-F6LBXVM1-WMH-BTR87

CANDELA DISTRIBUTION (FULL):

	0°
0°	3087.2
2.5°	3068.0
5°	3024.8
7.5°	2966.2
10°	2849.2
12.5°	2717.7
15°	2553.6
17.5°	2356.9
20°	2130.4
22.5°	1892.4
25°	1648.7
27.5°	1375.2
30°	1104.5
32.5°	811.9
35°	482.7
37.5°	257.2
40°	144.9
42.5°	79.7
45°	43.2
47.5°	22.1
50°	18.2
52.5°	16.3
55°	14.4
57.5°	13.4
60°	12.5
62.5°	10.6
65°	9.6
67.5°	7.7
70°	7.7
72.5°	6.7
75°	6.7
77.5°	5.8
80°	5.8
82.5°	4.8
85°	4.8
87.5°	2.9
90°	0.0

(END OF REPORT)