

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364751

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BL89BW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364751
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-42)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BL89BW
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,
BOTTOM LENS ACRYLIC OPAL SMOOTH, CLEAR 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2062.1 lumens
Efficiency: N/A
Efficacy: 76.4 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364751

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BL89BW

Luminous Intensity Polar Plot

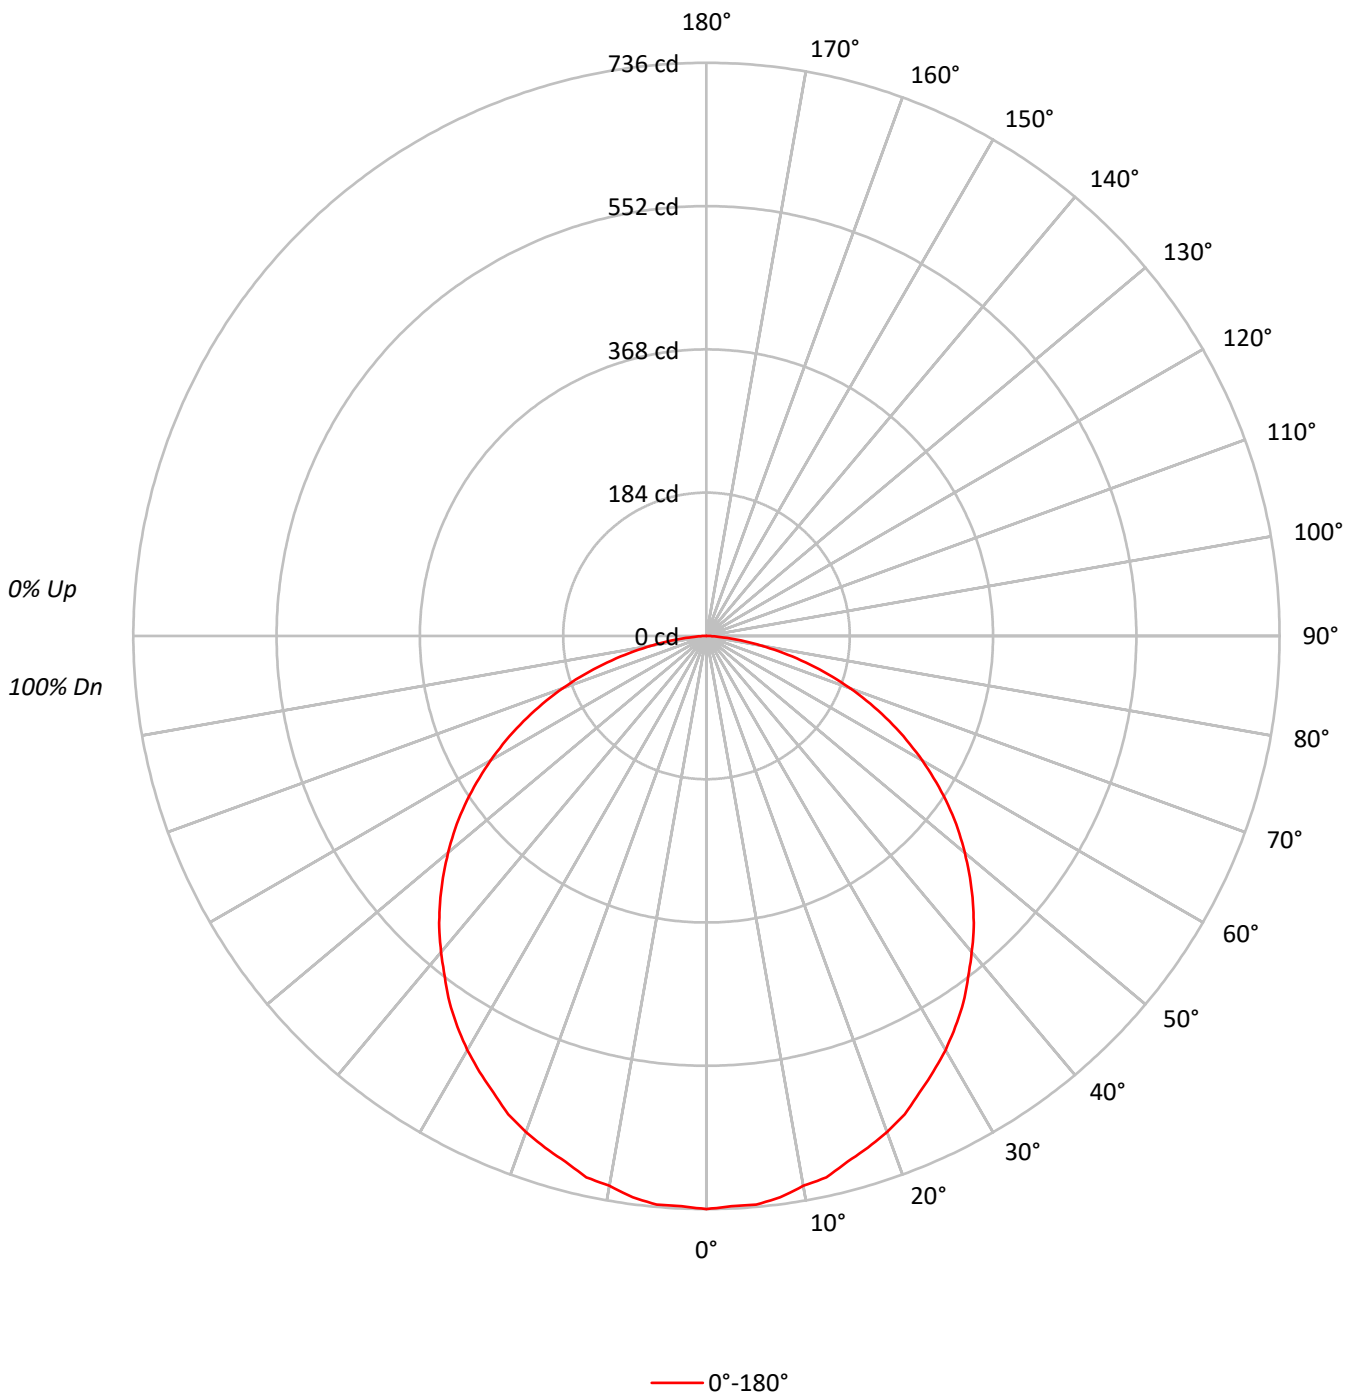



TEST NUMBER: P364751

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BL89BW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92		94	91	89		90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	75		82	78	74		79	75	72	70
3	90	80	71	65	88	78	70	64	75	69	63		72	67	62		70	65	61	59
4	83	71	62	55	80	69	61	55	67	59	54		64	58	53		62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46		58	51	46		56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41		52	45	40		51	45	40	38
7	65	51	43	36	63	51	42	36	49	41	36		48	41	36		46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32		44	37	32		42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29		40	34	29		39	33	29	27
10	53	40	32	26	52	39	32	26	38	31	26		37	31	26		36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	20104
5°	20099
10°	19887
15°	19767
20°	19708
25°	19500
30°	19366
35°	19174
40°	18898
45°	18697
50°	18400
55°	18049
60°	17482
65°	16740
70°	15653
75°	13931
80°	11168
85°	6895



TEST NUMBER: P364751

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BL89BW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.4	3.4
10°-20°	197.6	9.6
20°-30°	298.7	14.5
30°-40°	359.2	17.4
40°-50°	373.1	18.1
50°-60°	338.3	16.4
60°-70°	256.1	12.4
70°-80°	139.8	6.8
80°-90°	29.8	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	565.8	27.4
0°-40°	925.0	44.9
0°-60°	1636.4	79.4
0°-90°	2062.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2062.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	736	
5°	733	69
15°	699	198
25°	647	299
35°	575	359
45°	484	373
55°	379	338
65°	259	256
75°	132	140
85°	22	30
90°	0	



TEST NUMBER: P364751

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BL89BW

CANDELA DISTRIBUTION (FULL):

	0°
0°	736
2.5°	733
5°	733
7.5°	727
10°	717
12.5°	712
15°	699
17.5°	689
20°	678
22.5°	665
25°	647
27.5°	631
30°	614
32.5°	595
35°	575
37.5°	552
40°	530
42.5°	508
45°	484
47.5°	459
50°	433
52.5°	407
55°	379
57.5°	350
60°	320
62.5°	290
65°	259
67.5°	228
70°	196
72.5°	164
75°	132
77.5°	101
80°	71
82.5°	45
85°	22
87.5°	7
90°	0

(END OF REPORT)