

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364758

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364758
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR87
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2215.0 lumens
Efficiency: N/A
Efficacy: 82.0 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364758

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR87

Luminous Intensity Polar Plot

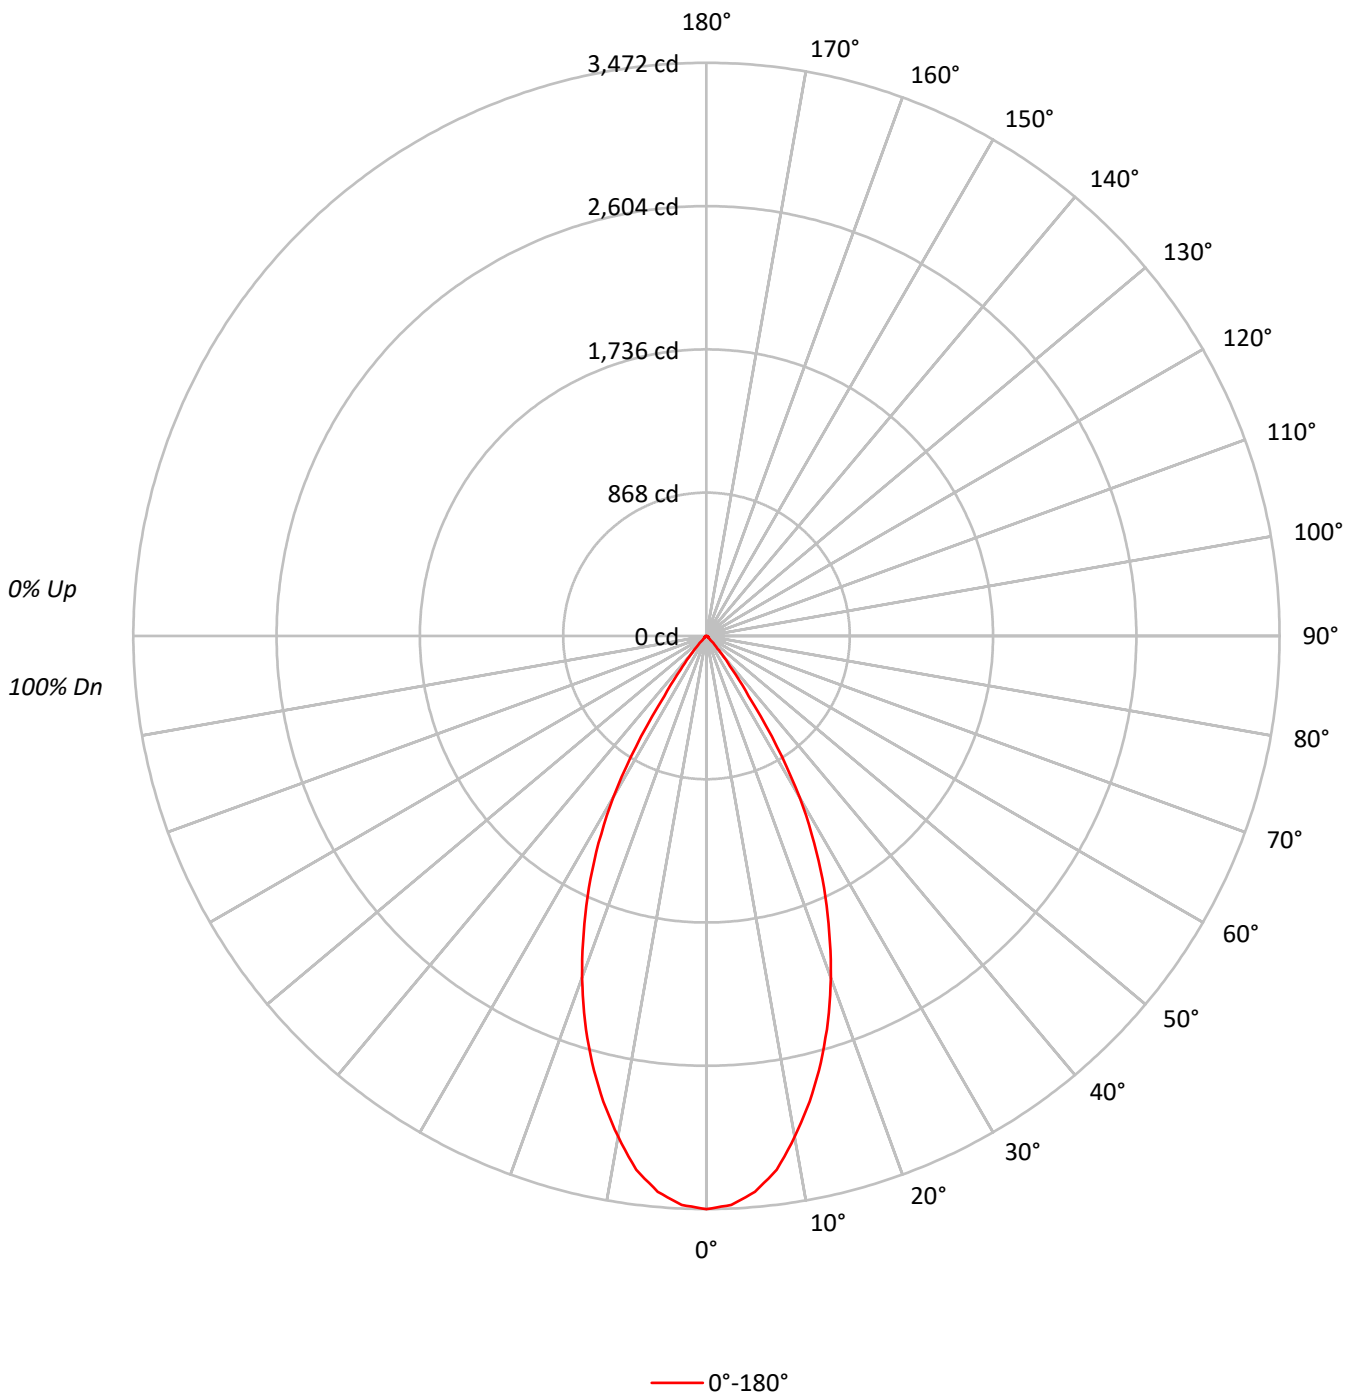



TEST NUMBER: P364758

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	248609
5°	242939
10°	223965
15°	198366
20°	167946
25°	133050
30°	93501
35°	38941
40°	13366
45°	3564
50°	1961
55°	1835
60°	1675
65°	1660
70°	1633
75°	1909
80°	2433
85°	4026



TEST NUMBER: P364758

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	313.2	14.1
10°-20°	742.4	33.5
20°-30°	762.1	34.4
30°-40°	322.7	14.6
40°-50°	39.7	1.8
50°-60°	13.1	0.6
60°-70°	9.7	0.4
70°-80°	7.5	0.3
80°-90°	4.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1817.7	82.1
0°-40°	2140.5	96.6
0°-60°	2193.3	99.0
0°-90°	2215.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2215.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3472	
5°	3380	313
15°	2676	742
25°	1684	762
35°	446	323
45°	35	40
55°	15	13
65°	10	10
75°	7	8
85°	5	5
90°	0	



TEST NUMBER: P364758

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR87

CANDELA DISTRIBUTION (FULL):

	0°
0°	3472.1
2.5°	3449.5
5°	3380.0
7.5°	3260.6
10°	3080.4
12.5°	2888.5
15°	2676.0
17.5°	2447.9
20°	2204.1
22.5°	1944.6
25°	1684.1
27.5°	1414.9
30°	1130.9
32.5°	797.0
35°	445.5
37.5°	255.6
40°	143.0
42.5°	75.4
45°	35.2
47.5°	20.6
50°	17.6
52.5°	15.7
55°	14.7
57.5°	13.7
60°	11.7
62.5°	10.8
65°	9.8
67.5°	8.8
70°	7.8
72.5°	7.8
75°	6.9
77.5°	6.9
80°	5.9
82.5°	5.9
85°	4.9
87.5°	2.9
90°	0.0

(END OF REPORT)