

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364759

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR89BI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364759
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR89BI
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR RFI 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2193.0 lumens
Efficiency: N/A
Efficacy: 81.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364759

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR89BI

Luminous Intensity Polar Plot

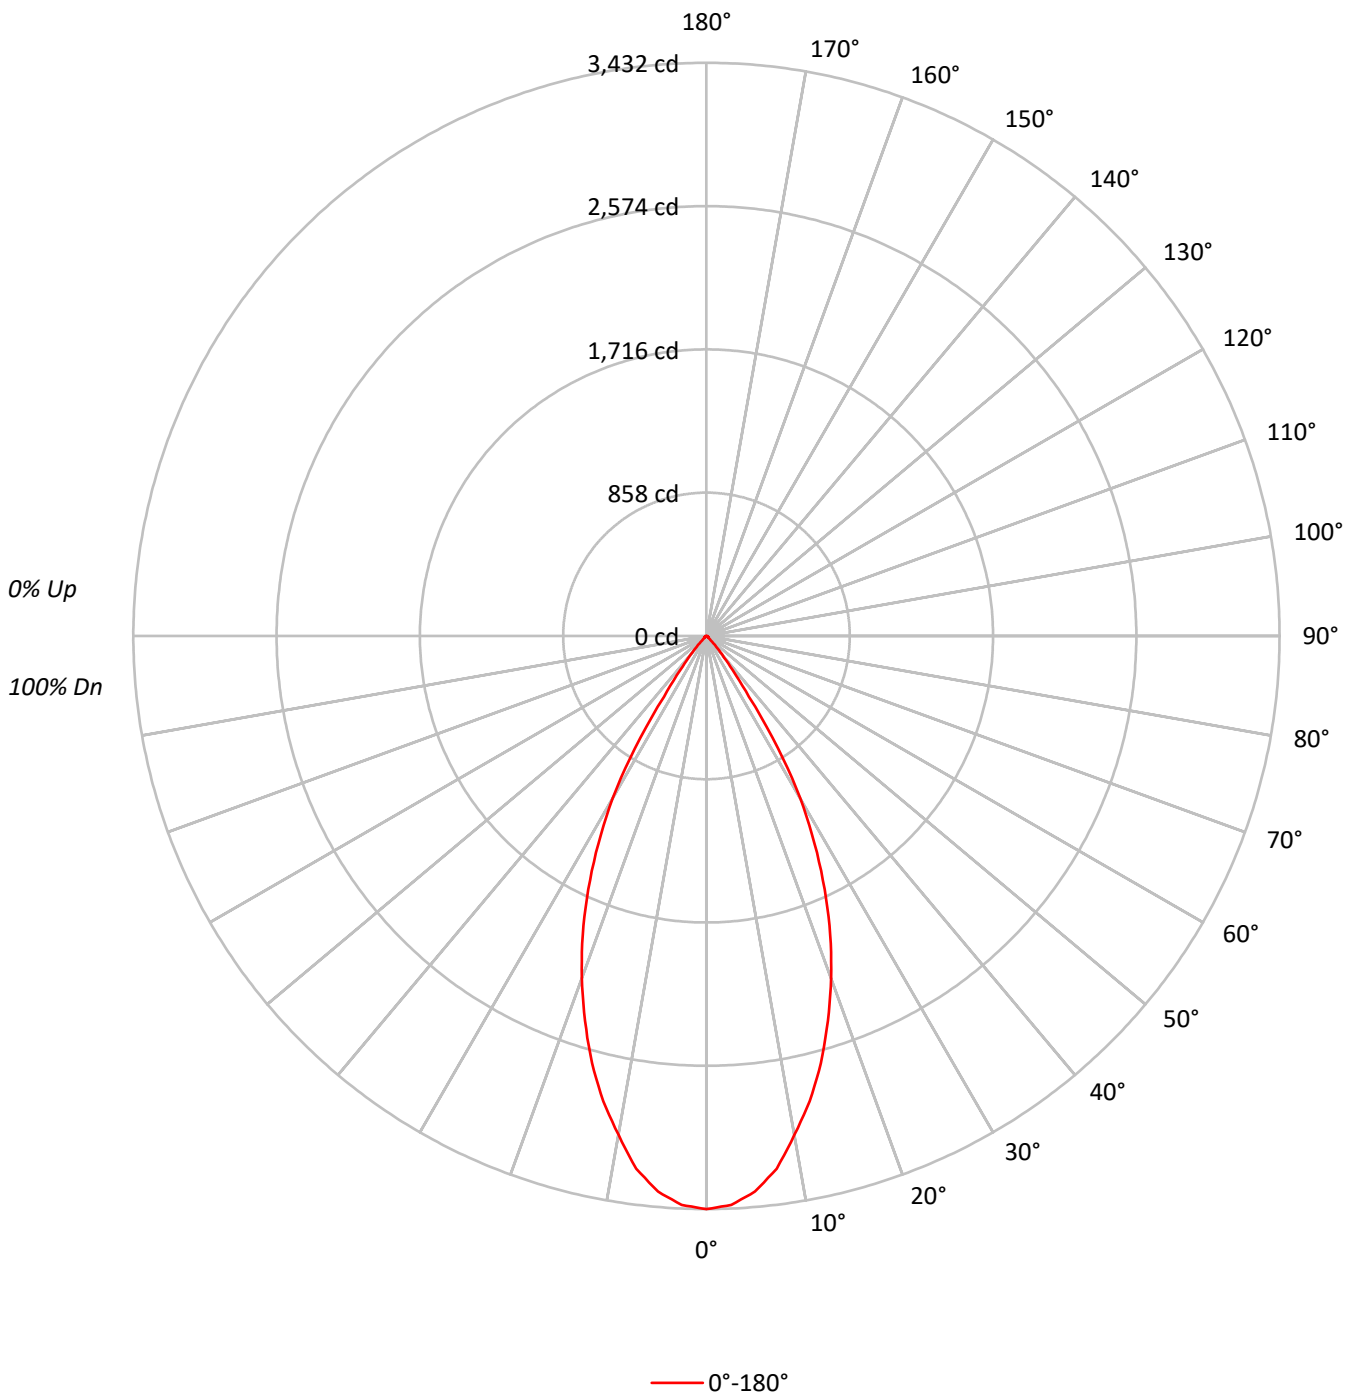



TEST NUMBER: P364759

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR89BI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	79
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	245730
5°	240021
10°	220606
15°	196335
20°	166300
25°	132245
30°	92972
35°	38801
40°	13394
45°	3463
50°	1749
55°	1610
60°	1590
65°	1559
70°	1549
75°	2047
80°	2268
85°	3779



TEST NUMBER: P364759

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR89BI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.2	14.1
10°-20°	733.7	33.5
20°-30°	757.1	34.5
30°-40°	322.0	14.7
40°-50°	38.6	1.8
50°-60°	11.7	0.5
60°-70°	9.1	0.4
70°-80°	7.3	0.3
80°-90°	4.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1799.9	82.1
0°-40°	2121.9	96.8
0°-60°	2172.2	99.1
0°-90°	2193.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2193.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3432	
5°	3339	309
15°	2649	734
25°	1674	757
35°	444	322
45°	34	39
55°	13	12
65°	9	9
75°	7	7
85°	5	4
90°	0	



TEST NUMBER: P364759

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-LI-BTR89BI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3431.9
2.5°	3409.7
5°	3339.4
7.5°	3217.3
10°	3034.2
12.5°	2853.9
15°	2648.6
17.5°	2417.4
20°	2182.5
22.5°	1937.4
25°	1673.9
27.5°	1402.0
30°	1124.5
32.5°	797.2
35°	443.9
37.5°	255.2
40°	143.3
42.5°	74.0
45°	34.2
47.5°	18.5
50°	15.7
52.5°	13.9
55°	12.9
57.5°	12.0
60°	11.1
62.5°	10.2
65°	9.2
67.5°	8.3
70°	7.4
72.5°	7.4
75°	7.4
77.5°	6.5
80°	5.5
82.5°	5.5
85°	4.6
87.5°	2.8
90°	0.0

(END OF REPORT)