

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365475

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365475
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-15)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1777.0 lumens
Efficiency: N/A
Efficacy: 65.8 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.84
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365475

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR84

Luminous Intensity Polar Plot

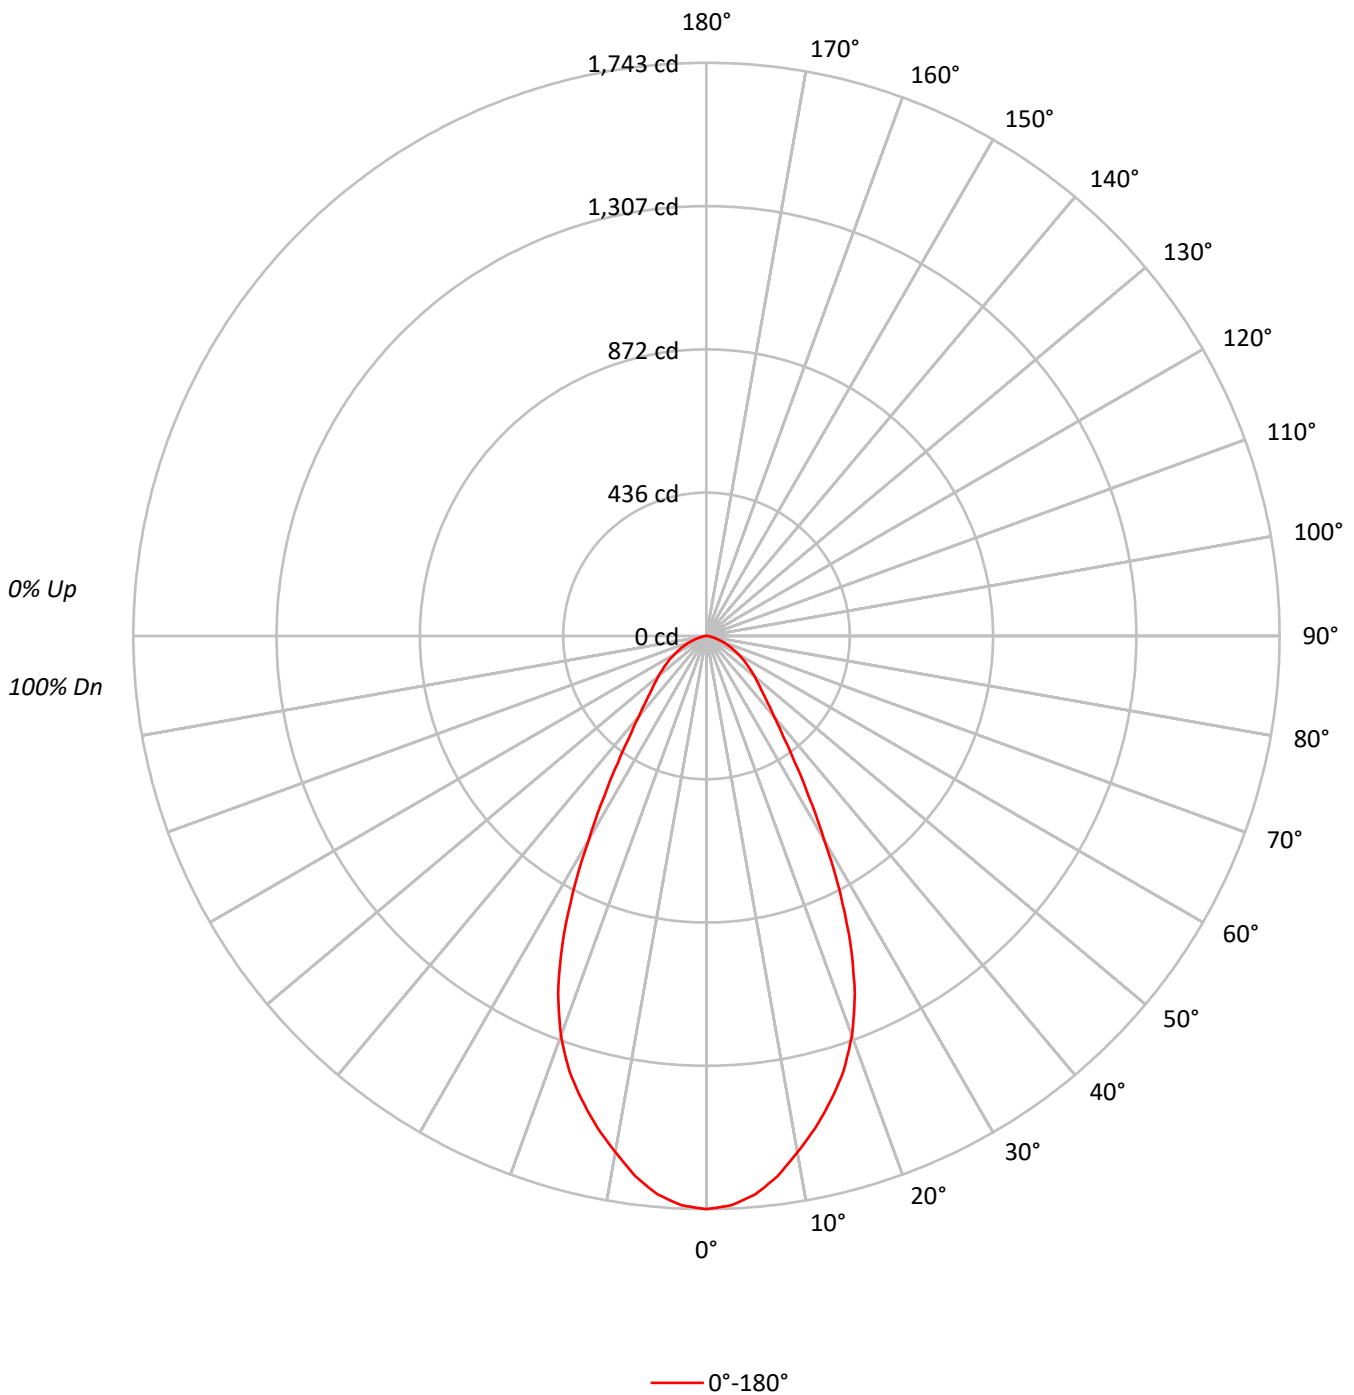



TEST NUMBER: P365475

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	86	84	82
3	99	91	85	80	96	89	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	77	72	91	82	76	72	80	75	71		78	74	70		76	72	69	67
5	87	77	71	65	85	76	70	65	74	69	65		73	68	64		71	67	63	62
6	82	72	65	60	81	71	64	60	69	64	59		68	63	59		67	62	58	57
7	78	67	60	55	76	66	60	55	65	59	55		64	58	54		62	58	54	53
8	73	63	56	51	72	62	56	51	61	55	51		60	55	51		59	54	50	49
9	70	59	52	48	68	58	52	48	57	52	47		56	51	47		55	51	47	46
10	66	55	49	45	65	55	49	45	54	48	44		53	48	44		52	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	124809
5°	122555
10°	115901
15°	108382
20°	98530
25°	82014
30°	59198
35°	40908
40°	29910
45°	24302
50°	21165
55°	18600
60°	16182
65°	13723
70°	11096
75°	7746
80°	4948
85°	5751



TEST NUMBER: P365475

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.2	9.0
10°-20°	408.5	23.0
20°-30°	466.6	26.3
30°-40°	300.9	16.9
40°-50°	189.0	10.6
50°-60°	134.0	7.5
60°-70°	80.8	4.5
70°-80°	31.2	1.8
80°-90°	6.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	1034.3	58.2
0°-40°	1335.2	75.1
0°-60°	1658.2	93.3
0°-90°	1777.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1777.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1743	
5°	1705	159
15°	1462	409
25°	1038	467
35°	468	301
45°	240	189
55°	149	134
65°	81	81
75°	28	31
85°	7	7
90°	0	



TEST NUMBER: P365475

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR84

CANDELA DISTRIBUTION (FULL):

0°	
0°	1743.1
2.5°	1733.1
5°	1705.1
7.5°	1657.1
10°	1594.1
12.5°	1532.1
15°	1462.1
17.5°	1387.1
20°	1293.1
22.5°	1179.1
25°	1038.1
27.5°	879.1
30°	716.0
32.5°	579.0
35°	468.0
37.5°	382.0
40°	320.0
42.5°	275.0
45°	240.0
47.5°	213.0
50°	190.0
52.5°	169.0
55°	149.0
57.5°	131.0
60°	113.0
62.5°	97.0
65°	81.0
67.5°	66.0
70°	53.0
72.5°	39.0
75°	28.0
77.5°	19.0
80°	12.0
82.5°	8.0
85°	7.0
87.5°	4.0
90°	0.0

(END OF REPORT)